



INSTRUCTIONS

GEH-1539D
Supersedes GEH-1539C

TYPES AB AND DB AMMETERS AND VOLTMETERS

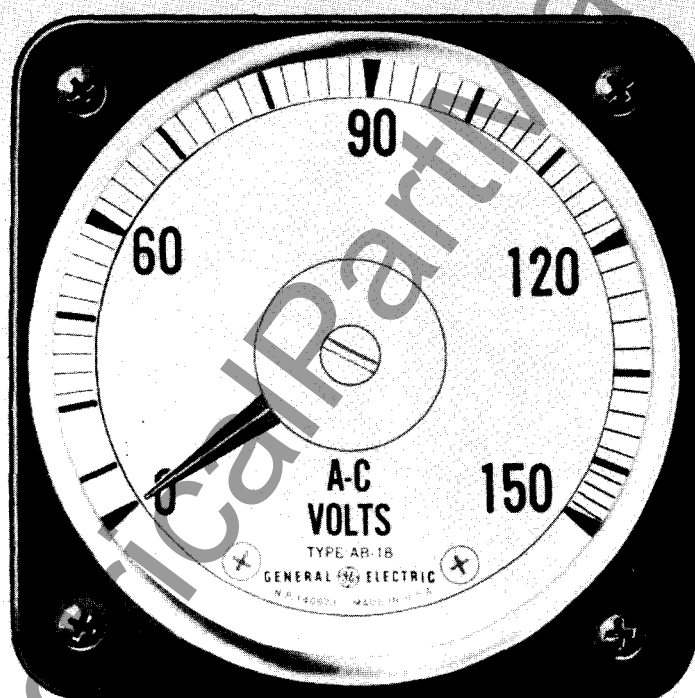


GENERAL  ELECTRIC

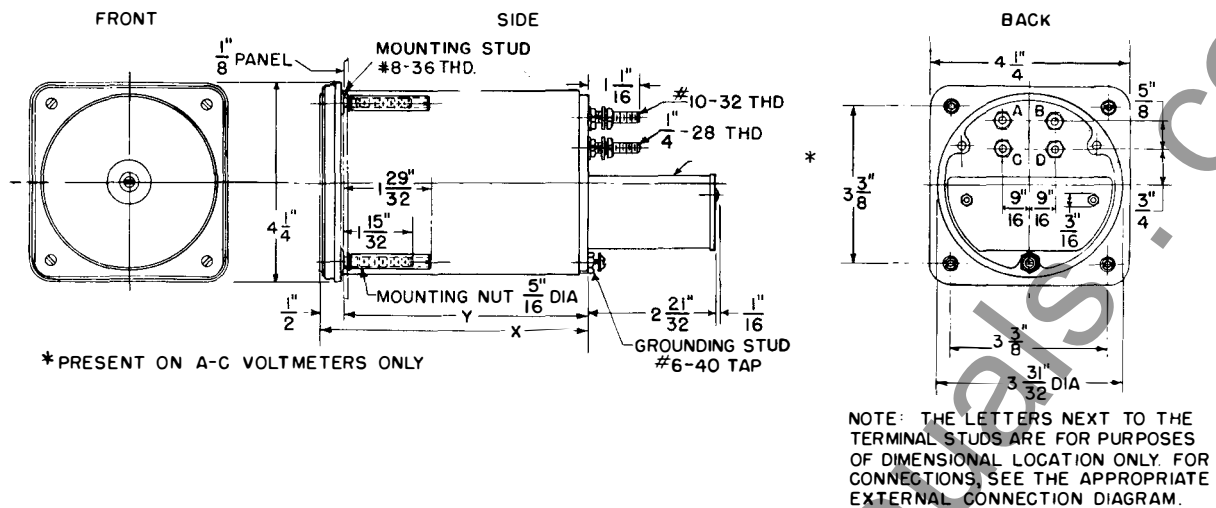

INSTRUMENT	STUD LOCATION	DIMENSIONS	
		X	Y
Type DB-10 Ammeter	CD	3 15/32"	2 31/32"
Type DB-10 Voltmeter	AB	3 15/32"	2 31/32"
Type DB-10 Ground Detector	CD	3 15/32"	2 31/32"
Type AB-10 Ammeter	AB	4 3/8"	3 7/8"
Type AB-10 Voltmeter	AB	4 3/8"	3 7/8"

Fig. 1. Dimensions of Types AB-10 and DB-10 ammeters and voltmeters and DB-10 ground detectors.

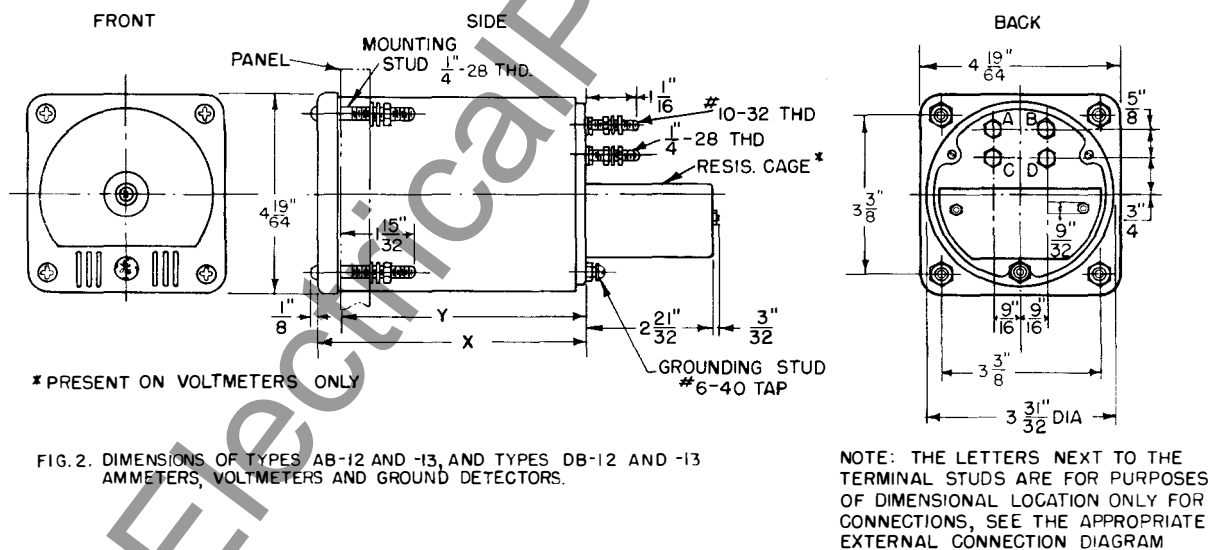

INSTRUMENT	STUD LOCATION	DIMENSIONS	
		X	Y
D-c Ammeters	CD	3 1/2"	2 31/32"
D-c Voltmeters	AB	3 1/2"	2 31/32"
D-c Ground Detector	CD	3 1/2"	2 31/32"
A-c Ammeters	AB	4 13/32"	3 7/8"
A-c Voltmeters	AB	4 13/32"	3 7/8"

Fig. 2. Dimensions of Types AB-12 and -13, and Types DB-12 and -13 ammeters, voltmeters, and ground detectors.

TYPES

AB-10*, -12*, -13*, -14, -15*, -16, -18, AND -19*

AND

DB-10*, -12*, -13*, -14, -15*, -16, -18, AND -19*

AMMETERS AND VOLTMETERS

INTRODUCTION

These instructions cover the installation of the General Electric Types AB and Types DB a-c and d-c ammeters and voltmeters. These instruments are long-scale, rectangular-pattern, switchboard types designed for flush mounting. The instruments, as supplied, are intended for use on the circuit specified by the customer.

There is a nameplate located on the back of each instrument. This nameplate gives the serial number and such information on the current or voltage rating, frequency rating, transformer ratio, full-scale value, and lead resistance as is applicable to the instrument. On voltmeters, the nameplate also indicates whether the resistor is internal or external.

Ammeters and voltmeters supplied with transformers will have their scales calibrated in primary amperes or primary volts respectively, unless otherwise specified.

A-C AMMETERS

When the circuit exceeds 20 amperes, a current transformer of the ratio indicated on the nameplate must be used. When the circuit exceeds 650 volts a current transformer must be used for purposes of insu-

sulation. The current transformer must have a frequency rating which corresponds to that indicated on the instrument nameplate.

A-C VOLTMETERS

When the circuit exceeds 750 volts, a potential transformer of the ratio indicated on the instrument nameplate must be used. The transformer must have a frequency rating which corresponds to that on the instrument nameplate.

An external Form-3 resistor must be used when so indicated on the instrument nameplate. The table below gives the number of tubes in the resistor supplied with instruments of various voltage ratings. When an external resistor is used, it must bear the same serial number as that of the instrument. The

EXTERNAL RESISTORS		
Description	Volts	External Resistor
Single-range	150	None
Single-range	175, 300	One 1-tube
Single-range	350	One 1-tube or 2-tube
Single-range	500	One 4-tube or 2-tube
Single-range	600, 750	One 4-tube
Double-range	75/150	None
Double-range	150/300	One 1-tube

* Discontinued type; no longer available

BURDEN DATA							
TYPE	Impedance in Ohms	Effective Resistance in Ohms	Inductance in Henries	Volt-amperes	Watts	Vars	Power Factor
120-volt, 60-cycle Potential Circuit							
Voltmeters (150-volt rating)	3020	2960	1.52	4.76	4.67	0.94	0.98
5-ampere, 60-cycle Current Circuit							
Ammeters	0.086	0.05	0.000187	2.15	1.25	1.78	0.58

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the General Electric Company.

dimensions of the external resistors are given in Fig. 10, 11, and 12.

D-C AMMETERS

D-c ammeters designed for current measurement above 60 amperes necessitate the use of shunts which are to be connected to the ammeter by means of the leads provided. In the event that leads are supplied by the purchaser, their resistance should agree with the value stamped on the instrument nameplate. Any change in the resistance of these leads will introduce an error in the reading. General Electric shunts of the same ampere rating and millivolt drop are interchangeable.

Warning: All ammeter shunts should be connected in the grounded side of the line when possible. When this is not possible, or the circuit cannot be grounded, the metal parts of manually operated contact devices or auxiliary pointer knobs which project through the cover are at line potential. When the cover is removed, also remember that the instrument windings, as well as the scale and pointer, are at line potential. Use caution to avoid contacting this potential.

As the resistance of the shunt leads used in certain applications cannot be predetermined at the factory, it has been found desirable to furnish some d-c ammeters with an internal rheostat to adjust for non-standard lead resistances.

The nameplate on the instrument has an **INSTRUMENT + LEAD RESIS.** value stamped upon it. This value is to be that of the total circuit, which is considered to include the resistance of the instrument and its leads with the shunt disconnected. This total circuit resistance must be adjusted correctly in order to attain the specified accuracy of the instrument.

To adjust the rheostat for a given lead resistance, proceed as follows:

If a resistance bridge is available, connect it across the shunt end of the leads (shunt disconnected) and the instrument across the opposite end. Set the resistance bridge for the **INSTRUMENT + LEAD RESIS.** value stamped on the instrument nameplate. Loosen the lock nut (located under the nameplate), and turn the rheostat shaft (which projects through the nameplate) until a zero deflection is secured on the bridge galvanometer. After the correct setting has been obtained, retighten the lock nut.

If a resistance bridge is not available, adjustment may be made by connecting a standard millivoltmeter across the shunt end of the leads (shunt disconnected) and the instrument across the opposite end. Apply a low adjustable d-c voltage across the shunt end of the leads and adjust this voltage until the indication on the standard millivoltmeter agrees with the full-

scale millivolts (marked **FULL SCALE MV**) on the instrument nameplate. Loosen the lock nut (located under the nameplate), and turn the rheostat shaft (which projects through the nameplate) until the ammeter reads full scale. Retighten the lock nut.

Note: The maximum lead resistance is about 1 ohm for a 100-millivolt instrument and about 0.26 ohm for a 50-millivolt instrument.

D-C VOLTMETERS

D-c voltmeters designed for use on circuits above 750 volts and d-c ground detectors for voltages up to and including 750 volts are furnished with external resistors and are connected directly to the circuit to be measured.

INSTALLATION

MOUNTING

The appropriate dimension drawings shown in this book should be followed when drilling the switchboard. All drilling and all wiring on the switchboard should be completed before mounting the instruments. Supporting studs are provided for mounting on the switchboard. Mount the instruments in a level position.

These instruments are practically unaffected by stray fields, but it is advisable to keep transformers and wires carrying heavy current as far as possible from all indicating instruments.

When there is no current flowing through the instrument and it is properly leveled, the pointer should indicate zero. Any deviation from zero should be corrected by means of the zero adjustor.

TERMINAL CONNECTIONS

The threads on the terminal studs and nuts should be clean and bright. The contact surfaces of nuts, busbars, and cable terminals must be thoroughly clean to insure good contact. If a nut turns hard, it should be run over a tap of the proper dimensions; otherwise, the threads on the stud may be ruined or the stud turned in the instrument, thereby breaking the connection. After the instrument has been connected, tighten the nuts sufficiently to insure good contact. Do not overtighten.

The nuts and studs used in these instruments are U. S. standard.

Connect the instrument as shown in the appropriate diagram. The numbers in these connection diagrams correspond to the numbers stamped on the instrument terminals.

On instruments manufactured prior to 1951, the terminal studs are stamped with letters instead of

numbers. For such instruments, the connection diagrams in this book may be followed by observing the pictorial positioning of the terminals, rather than the stud markings.

Warning: Care must be exercised in handling high tension wires when installing instruments on such circuits.

POLARITY MARKINGS OF TRANSFORMERS

Transformers of present manufacture have polarity markings of white paint or markers, H_1 for primary and X_1 for secondary, on or near the proper terminal. These markings denote the relative polarity and facilitate the making of proper connections for correct direction of deflection of instruments. The relation of the marked leads is such that instantaneous direction of the current in them is the same; namely, toward the transformer in the marked primary lead and from the transformer in the marked secondary lead, or vice versa. These polarity markings are indicated in the connection diagrams and should be followed irrespective of their physical location on the transformers.

GROUNDING CASES OF A-C INSTRUMENTS

It is frequently desirable to use transformers on circuits of over 150 volts. The cases of instruments which are used with current and potential transformers should be connected to the grounded side of the secondary circuits of such transformers. No. 12 Awg copper wire is suitable for this purpose.

Grounding connections from the grounded side of the secondary circuits to earth should be made in accordance with the provisions of the National Electric Code.

PRINCIPLES OF OPERATION

The d-c instruments utilize a permanent-magnet, moving-coil mechanism adapted for the longscale instrument design. Current passing through the moving coil produces a magnetic field which interacts with the field produced by the permanent magnet, thus supplying the deflecting torque. The moving system deflects until counterbalanced by the instrument control springs.

The a-c instruments (except expanded-scale voltmeters) employ a moving iron mechanism of the attraction-repulsion type. In these instruments, three soft-iron strips of carefully determined configuration are mounted inside the field coil.

When this coil is energized, it magnetizes the three iron strips and also a vane attached to the pivoted shaft. The center iron strip exerts a force of repulsion, and the other two strips a force of attraction, on the moving vane, in such a manner that the pointer moves upscale until the torque is counterbalanced by the instrument control spring.

The expanded-scale, a-c voltmeters utilize a standard electrodynamic mechanism with a saturable reactor placed in series with the moving coil. The moving-coil circuit is connected in parallel with a circuit consisting of the field and frequency compensating network.

When the voltage source is applied across the saturable reactor, the exciting current varies in a nonlinear fashion with the voltage. The scale distribution corresponds to this nonlinear variation, and the instrument produces an accurate, readable indication in the area of the reference voltage.

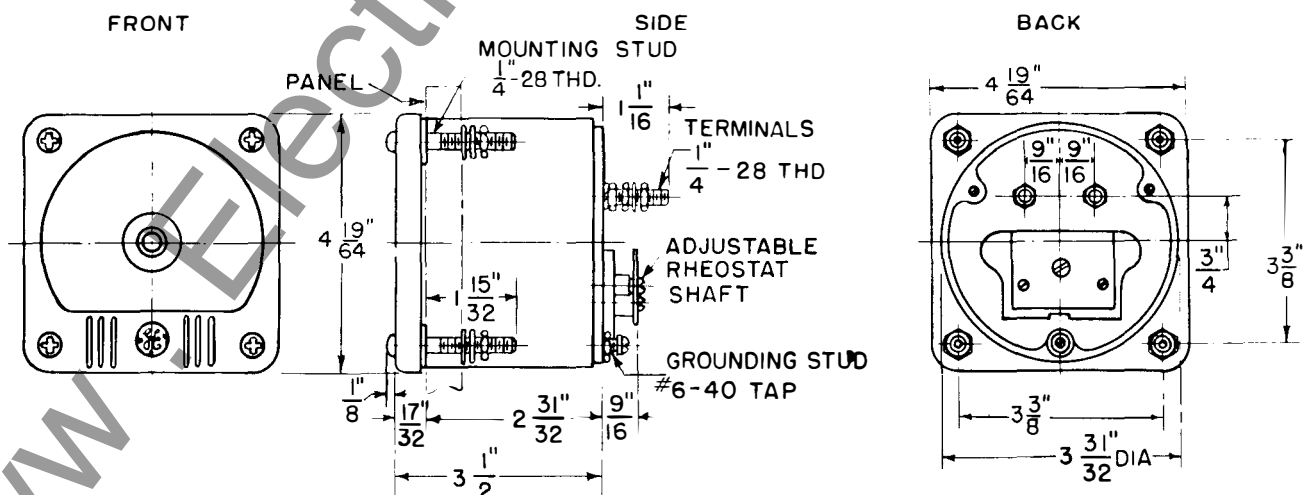


Fig. 3. Dimensions of Types DB-12 and -13 ammeters with rheostat for lead-length compensation.

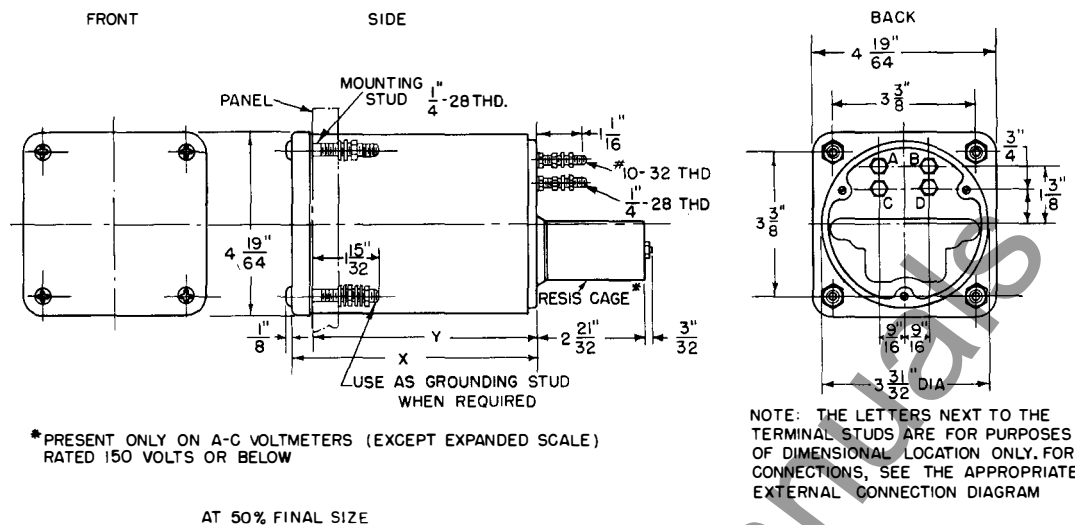


Fig. 4. Dimensions of Types AB-14, -15, and -19 and Types DB-14, -15, and -19 ammeters, voltmeters, and ground detectors

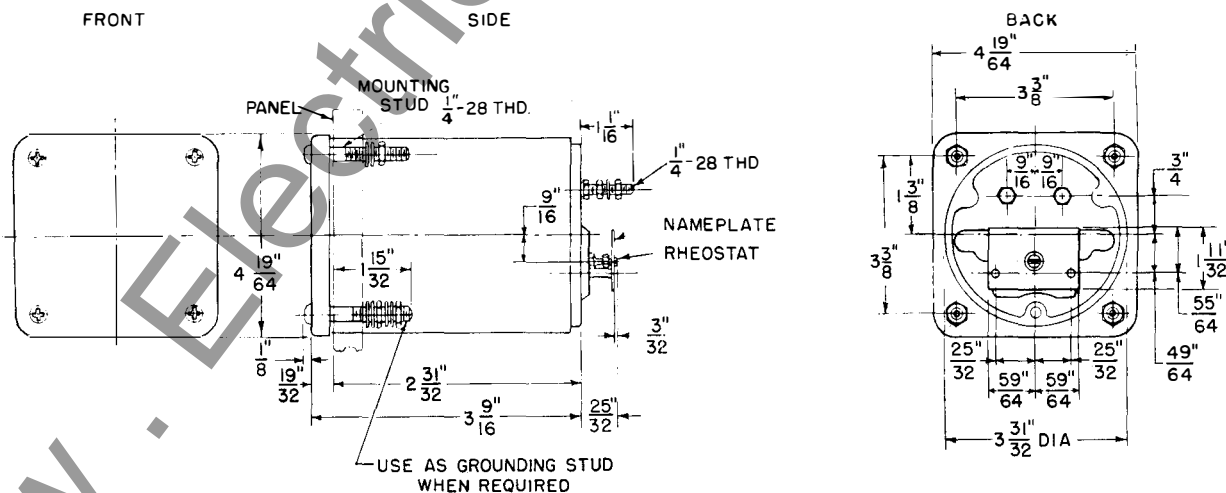


Fig. 5. Dimensions of Types DB-14, -15, and -19 ammeters with rheostat for lead-length compensation.



INSTRUMENT	STUD LOCATION	DIMENSIONS (MODEL NO. ENDING IN "1")		DIMENSIONS (MODEL NO. ENDING IN "2")	
		X	Y	X	Y
D-c Ammeter	CD	3 5/16"	2 27/32"	4 7/32"	3 3/4"
D-c Voltmeter	AB	3 5/16"	2 27/32"	4 7/32"	3 3/4"
D-c Ground Detector	CD	3 5/16"	2 27/32"	4 7/32"	3 3/4"
A-c Ammeter	AB	4 7/32"	3 3/4 "	4 7/32"	3 3/4"
A-c Ammeter (double-rated)	AB EF	4 7/32"	3 3/4 "	4 7/32"	3 3/4"
A-c Voltmeter	AB	4 7/32"	3 3/4 "	4 7/32"	3 3/4"
A-c Voltmeter (expanded-scale)	AB	5 21/32"	3 3/16"	4 7/32"	3 3/4"

Fig. 6. Dimensions of Types AB-16 and DB-16 ammeters, voltmeters, and ground detectors.


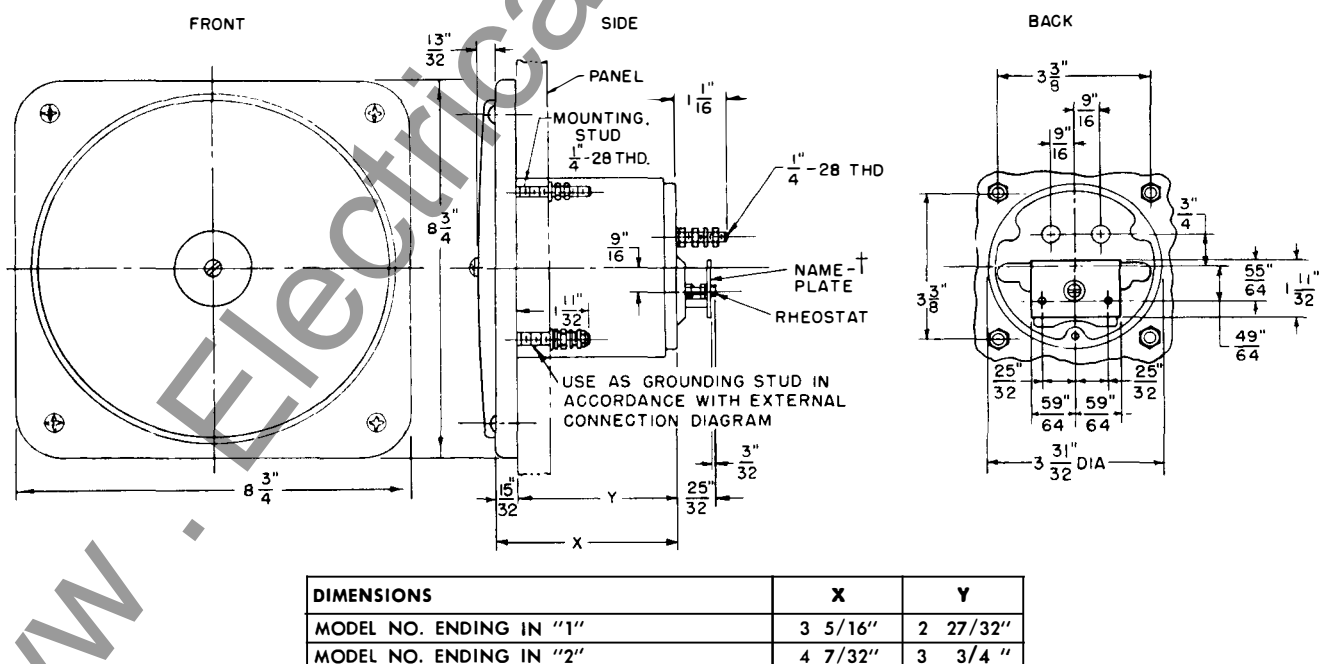


Fig. 7. Dimensions of Type DB-16 ammeters with rheostat for lead-length compensation.

†Nameplate is in this location only on instruments having Model No. ending in “2”.

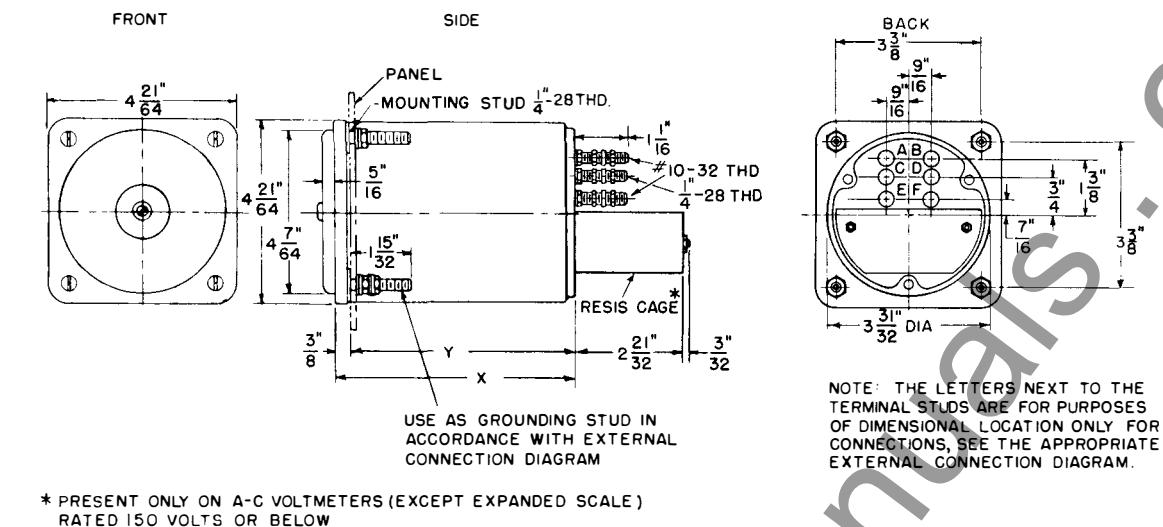

INSTRUMENT	STUD LOCATION	DIMENSIONS (MODEL NO. ENDING IN "1")		DIMENSIONS (MODEL NO. ENDING IN "2")	
		X	Y	X	Y
D-c Ammeter	CD	3 11/32"	2 31/32"	4 1/4"	3 7/8"
D-c Voltmeter	AB	3 11/32"	2 31/32"	4 1/4"	3 7/8"
D-c Ground Detector	CD	3 11/32"	2 31/32"	4 1/4"	3 7/8"
A-c Ammeter	AB	4 1/4"	3 7/8"	4 1/4"	3 7/8"
A-c Ammeter (double-rated)	AB EF	4 1/4"	3 7/8"	4 1/4"	3 7/8"
A-c Voltmeter	AB	4 1/4"	3 7/8"	4 1/4"	3 7/8"
A-c Voltmeter (expanded-scale)	AB	5 11/16"	5 5/16"	4 1/4"	3 7/8"

Fig. 8. Dimensions of Types AB-18 and DB-18 ammeters, voltmeters, and ground detectors.

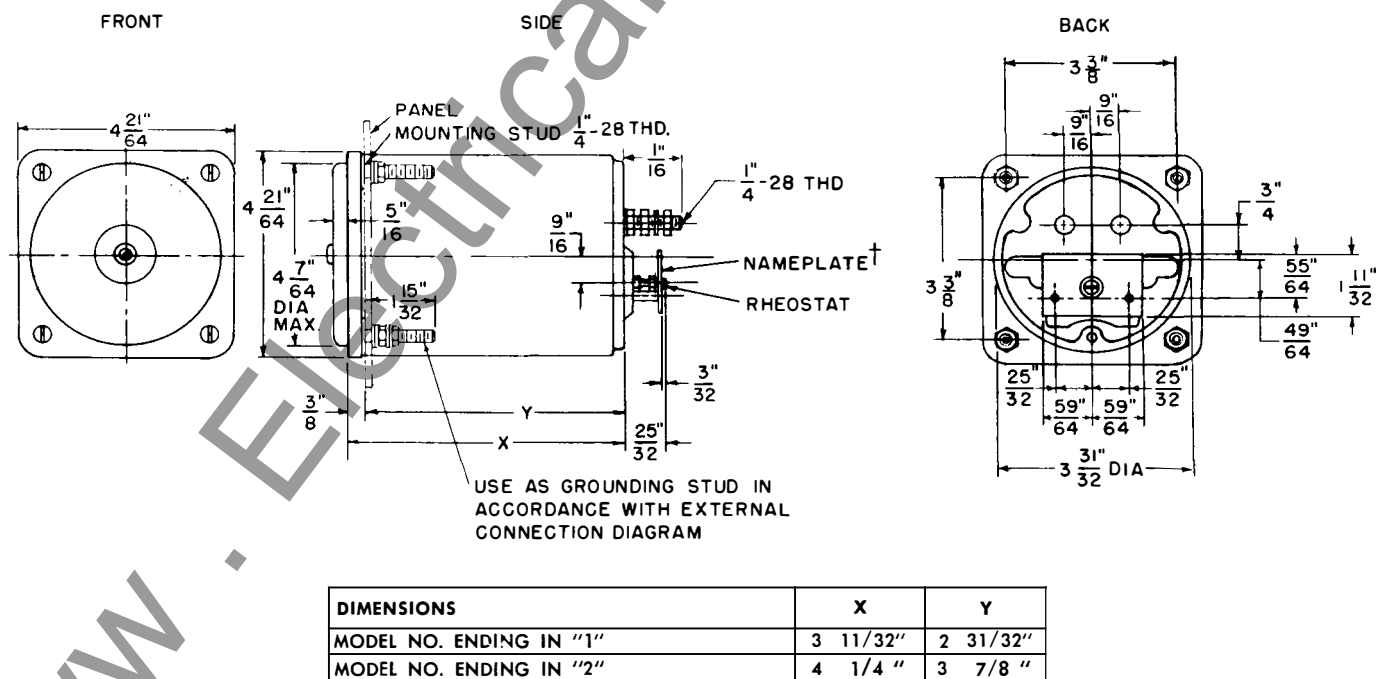


Fig. 9. Dimensions of Type DB-18 ammeters with rheostat for lead-length compensation.

†Nameplate is in this location only on instruments having Model No. ending in "2".

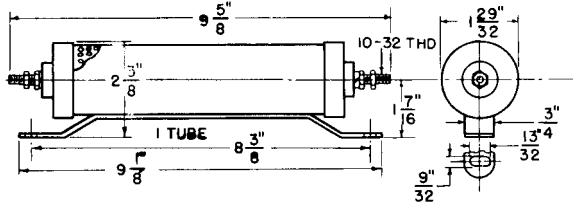


Fig. 10. Single-tube, Form-3 resistor.

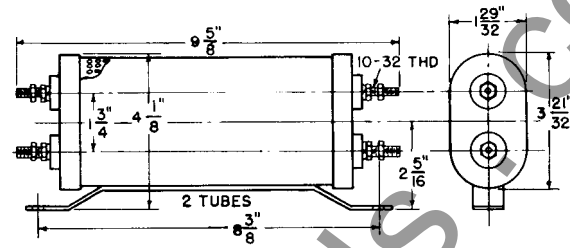


Fig. 11. Two-tube, Form-3 resistor.

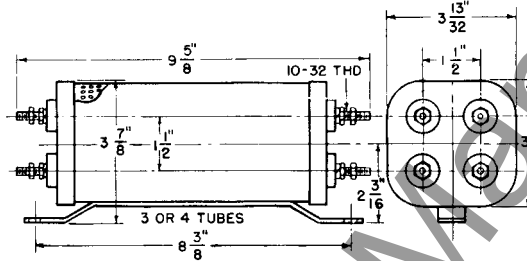


Fig. 12. Four-tube, Form-3 resistor.

CONNECTION DIAGRAMS

(Back Views)




Fig. 13. Self-contained d-c ammeter.




Fig. 14. D-c ammeter with external shunt.




Fig. 15. Low range on double-rated d-c ammeter.




Fig. 16. High range on double-rated d-c ammeter.




Fig. 17. Self-contained d-c voltmeter.




Fig. 18. D-c voltmeter rated above 750 volts (with external resistor).

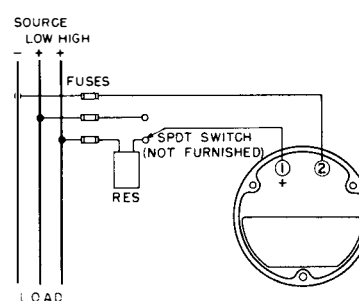


Fig. 19. Double-rated d-c voltmeter (illustrating use of switch to select range).




Fig. 19a. D-c ground detector for voltages up to and including 750 volts (with external resistor).




Fig. 20. Self-contained a-c ammeter.




Fig. 21. A-c ammeter (Types AB-10, -12, and -13 only) with current transformer.




Fig. 22. A-c ammeter (Types AB-14, -15, -16, -18, and -19 only) with current transformer.




Fig. 23. Low range on double-rated a-c ammeter.




Fig. 24. High range on double-rated a-c ammeter.




Fig. 25. Self-contained a-c voltmeter.




Fig. 26. A-c voltmeter rated above 150 volts (with external resistor).




Fig. 27. A-c voltmeter (Types AB-10, -12, and -13 only) with potential transformer.




Fig. 28. A-c voltmeter (Types AB-14, -15, -16, -18, and -19 only) with potential transformer.

FORM-15, 50-MILLIVOLT SHUNTS

Amp	DIMENSIONS IN INCHES												Connection Strips Each End
	Fig. No. 29	A	B	C	D	E	F	G	H	J	K	L	
75	a	6 $\frac{1}{4}$	1 $\frac{1}{8}$	5 $\frac{1}{4}$	3 $\frac{1}{16}$	$\frac{1}{2}$	$\frac{1}{2}$	1 $\frac{9}{32}$	1 $\frac{3}{32}$	$\frac{1}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	1
80	a	6 $\frac{1}{4}$	1 $\frac{1}{8}$	5 $\frac{1}{4}$	3 $\frac{1}{16}$	$\frac{1}{2}$	$\frac{1}{2}$	1 $\frac{9}{32}$	1 $\frac{3}{32}$	$\frac{1}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	1
100	a	6 $\frac{1}{4}$	1 $\frac{1}{8}$	5 $\frac{1}{4}$	3 $\frac{1}{16}$	$\frac{1}{2}$	$\frac{1}{2}$	1 $\frac{9}{32}$	1 $\frac{3}{32}$	$\frac{1}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	1
150	a	6 $\frac{1}{4}$	1 $\frac{1}{8}$	5 $\frac{1}{4}$	3 $\frac{1}{16}$	$\frac{11}{16}$	$\frac{3}{4}$	1 $\frac{17}{32}$	1 $\frac{7}{32}$	$\frac{1}{4}$	$\frac{7}{16}$	$\frac{7}{16}$	1
200	a	6 $\frac{1}{4}$	1 $\frac{1}{8}$	5 $\frac{1}{4}$	3 $\frac{1}{16}$	$\frac{7}{8}$	$\frac{3}{4}$	1 $\frac{17}{32}$	1 $\frac{7}{32}$	$\frac{1}{4}$	$\frac{5}{16}$	$\frac{5}{16}$	1
250	a	6 $\frac{1}{4}$	1 $\frac{1}{8}$	5 $\frac{1}{4}$	3 $\frac{1}{16}$	1 $\frac{1}{8}$	$\frac{3}{4}$	1 $\frac{17}{32}$	1 $\frac{7}{32}$	$\frac{1}{4}$	$\frac{13}{16}$	$\frac{13}{16}$	1
300	a	6 $\frac{1}{4}$	1 $\frac{1}{8}$	5 $\frac{1}{4}$	3 $\frac{1}{16}$	1 $\frac{1}{8}$	$\frac{3}{4}$	1 $\frac{17}{32}$	1 $\frac{7}{32}$	$\frac{1}{4}$	$\frac{13}{16}$	$\frac{13}{16}$	1
400	a	8 $\frac{1}{4}$	1 $\frac{1}{8}$	6 $\frac{1}{4}$	3 $\frac{3}{8}$	1 $\frac{3}{4}$	1	2 $\frac{3}{16}$	1 $\frac{7}{32}$	$\frac{3}{8}$	$\frac{5}{8}$	$\frac{5}{8}$	1
500	a	8 $\frac{1}{4}$	1 $\frac{1}{8}$	6 $\frac{1}{4}$	3 $\frac{3}{8}$	1 $\frac{3}{4}$	1	2 $\frac{3}{16}$	1 $\frac{7}{32}$	$\frac{3}{8}$	$\frac{5}{8}$	$\frac{5}{8}$	1
600	a	8 $\frac{1}{4}$	2	6 $\frac{1}{4}$	3 $\frac{3}{8}$	1 $\frac{3}{4}$	1	2 $\frac{3}{16}$	2 $\frac{1}{32}$	$\frac{3}{8}$	2 $\frac{1}{32}$	2 $\frac{1}{32}$	1
800	a	8 $\frac{1}{4}$	2 $\frac{1}{2}$	6 $\frac{1}{4}$	3 $\frac{3}{8}$	2	1	2 $\frac{3}{16}$	2 $\frac{1}{32}$	$\frac{3}{8}$	2 $\frac{1}{32}$	2 $\frac{1}{32}$	1
1000	b	9 $\frac{1}{4}$	3	7 $\frac{1}{4}$	4 $\frac{1}{8}$	1 $\frac{11}{16}$	...	2 $\frac{1}{4}$	2 $\frac{1}{32}$	...	1 $\frac{15}{16}$	$\frac{1}{4}$	2
1200	b	10	3	8	5	2 $\frac{5}{16}$	1 $\frac{1}{8}$	2 $\frac{1}{4}$	1 $\frac{7}{32}$	...	$\frac{1}{4}$	$\frac{1}{4}$	2
1500	b	10	3	8	5	2 $\frac{5}{16}$	1 $\frac{1}{8}$	2 $\frac{1}{4}$	1 $\frac{7}{32}$	...	$\frac{1}{4}$	$\frac{1}{4}$	3
2000	b	10 $\frac{1}{2}$	4	8 $\frac{1}{2}$	5 $\frac{1}{2}$	2 $\frac{15}{32}$	2 $\frac{1}{2}$	2 $\frac{1}{4}$	2 $\frac{1}{32}$	3 $\frac{5}{64}$	...	$\frac{1}{4}$	3
2500	b	10 $\frac{1}{2}$	4	8 $\frac{1}{2}$	5 $\frac{1}{2}$	2 $\frac{15}{32}$	2 $\frac{1}{2}$	2 $\frac{1}{4}$	2 $\frac{1}{32}$	1 $\frac{19}{32}$	...	$\frac{1}{4}$	4
3000	b	11 $\frac{1}{2}$	4	9 $\frac{1}{2}$	6 $\frac{1}{2}$	3 $\frac{9}{16}$	2 $\frac{1}{2}$	2 $\frac{1}{4}$	2 $\frac{1}{32}$	2 $\frac{19}{32}$	...	$\frac{1}{4}$	4
4000	c	11 $\frac{1}{2}$	4	9 $\frac{1}{2}$	6 $\frac{1}{2}$	7	4 $\frac{1}{16}$	2 $\frac{3}{4}$	2 $\frac{1}{32}$	...	...	...	5
5000	c	11 $\frac{1}{2}$	5	9 $\frac{1}{2}$	6 $\frac{1}{2}$	7 $\frac{1}{2}$	4 $\frac{1}{2}$	2 $\frac{3}{4}$	2 $\frac{1}{32}$	...	...	...	5
6000	c	13 $\frac{1}{4}$	6	11 $\frac{1}{4}$	8 $\frac{1}{4}$	8	4 $\frac{21}{32}$	2 $\frac{3}{4}$	3	...	...	...	5
8000	c	15 $\frac{1}{4}$	6	13 $\frac{1}{4}$	10 $\frac{1}{4}$	9 $\frac{1}{4}$	6 $\frac{7}{32}$	3 $\frac{1}{4}$	3	...	...	...	7
10000	c	17 $\frac{1}{4}$	8	15 $\frac{1}{4}$	12 $\frac{1}{4}$	10 $\frac{1}{2}$	5 $\frac{1}{4}$	3 $\frac{3}{4}$	...	...	...	...	7

For current values above 10,000 amp, the best arrangement is to use two or more shunts in parallel with a separate set of leads for each shunt.

The Form-15 shunts for 800 amp and below have single-leaf terminals; above 800 amp, multileaf terminals are provided.

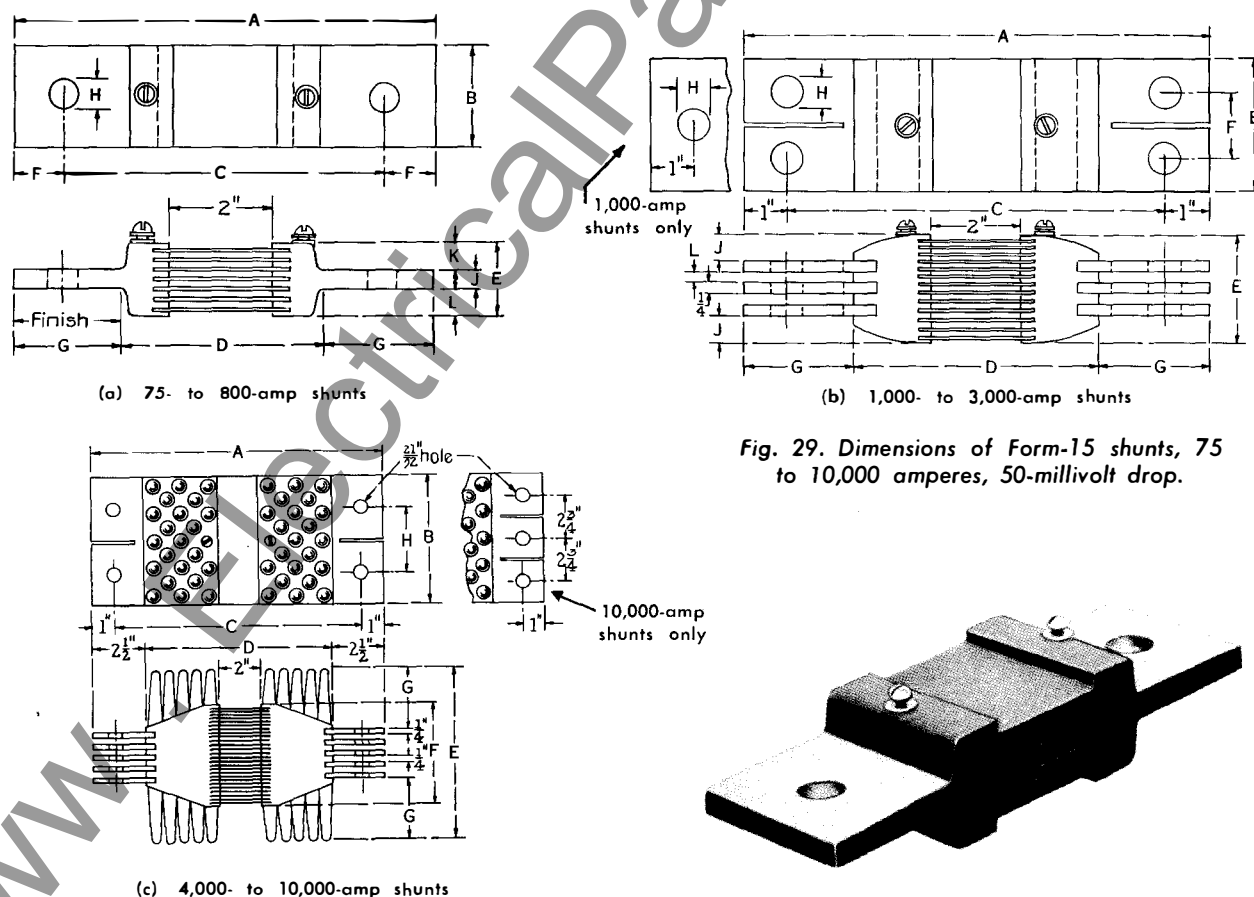


Fig. 29. Dimensions of Form-15 shunts, 75 to 10,000 amperes, 50-millivolt drop.

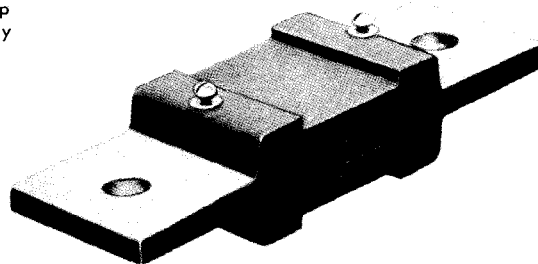


Fig. 30. Form-15 shunts, 75 to 800 amperes.

GENERAL ELECTRIC APPARATUS SALES OFFICES

Ready to Assist You with Your Problems

Abilene, Texas.....	442 Cedar St.	Fergus Falls, Minn.....	P.O. Box 197	Niagara Falls, N. Y.....	P.O. Box 715, 44 Fall St.
Akron 8, Ohio.....	335 S. Main St.	Flint 2, Mich.....	108 N. Court Ave.	Norfolk 10, Va.....	229 W. Bute St.
Albany 3, N. Y.....	8 Colvin Ave.	Fort Wayne 6, Ind.....	653 S. Saginaw St.	Oakland 12, Calif.....	409 Thirteenth St.
Albuquerque, N. Mex.....	323 Third St., S.W.	Fort Worth 2, Tex.....	3606 So. Calhoun St.	Oklahoma City 2, Okla.....	119 N. Robinson St.
Alexandria, La.....	720 Murray St.	Fort Worth 2, Tex.....	408 W. Seventh St.	Omaha 2, Nebr.....	409 S. Seventeenth St.
Allentown, Pa.....	1132 Hamilton St.	Fort Worth, Tex.....	P.O. Box 9218, Avia. & Def.,	Pasco, Wash.....	P.O. Box 971, 824 W. Lewis St.
Amarillo, Texas.....	Amarillo Bldg.		6200 Camp Bowie Blvd.	Peoria 2, Ill.....	309 Jefferson Bldg.
Appleton, Wisc.....	510 W. College Ave.	Fresno 1, Calif.....	407 Patterson Bldg.	Philadelphia 2, Pa.....	3 Penn Center Plaza
Atlanta 2, Ga.....	P.O. Box 4659		Tulare and Fulton St.	Phoenix, Ariz.....	P.O. Box 4037, 220 Luhrs Tower
	1860 Peachtree Rd., N.W.	Grand Rapids 2, Mich.....	425 Cherry St., S.E.	Pittsburgh 22, Pa.....	The Oliver Bldg., Mellon Sq.
Augusta, Me.....	152 State St.	Greensboro, N. C.....	P.O. Box 1162	Portland 7, Ore.....	P.O. Box 909
Baltimore 1, Md.....	111 Park Ave.		301 S. Elm St.		2929 N.W. 29th Ave.
Bangor, Me.....	P.O. Box 778, 77 Central St.	Greenville, S. C.....	P.O. Box 1408	Providence 3, R. I.....	Industrial Trust Bldg.
Baton Rouge 6, La.....	3170 Florida Blvd.		108 W. Washington St.	Raleigh, N. C.....	P.O. Box 2507, 16 W. Martin St.
Battle Creek, Mich.....	25 W. Michigan Ave.	Gulfport, Miss.....	207 Jo-Fran Bldg.	Reading, Pa.....	31 N. Sixth St.
Beaumont, Texas.....	P.O. Box 2870	Hagerstown, Md.....	P.O. Box 477	Richmond 17, Va.....	P.O. Box 2188
	1385 Colder Ave.		Professional Arts Bldg.		700 E. Franklin St.
Billings, Mont.....	Rm. 816, 303 No. Broadway	Hartford 5, Conn.....	764 Asylum Ave.	Riverside, Calif.....	3570 Ninth St.
Binghamton, N. Y.....	P.O. Box 931	Haouston 1, Texas.....	1312 Live Oak St.	Roanoke 5, Va.....	P.O. Box 871
	19 Chenango St.	Indianapolis 4, Ind.....	110 N. Illinois St.		920 S. Jefferson St.
Birmingham 2, Ala.....	P.O. Box 2602	Jackson, Mich.....	120 W. Michigan Ave.	Rochester 4, N. Y.....	89 E. Ave.
	1804 Seventh Ave., N.	Jackson 1, Miss.....	203 W. Capital St.	Rockford, Ill.....	110 S. First St.
Bismarck, N. Dak.....	418 Rosser Ave.	Jacksonville 2, Fla.....	Station G—Box 48	Rutland, Vt.....	38 1/2 Center St.
Bluefield, W. Va.....	P.O. Box 447	Johnstown, Pa.....	700 E. Union St.	Sacramento 14, Calif.....	626 Forum Bldg.
	704 Bland St., Appalachian Bldg.	Joplin, Mo.....	841 Oak St.	Saginaw, Mich.....	Second National Bank Bldg.
Boise, Idaho.....	1524 Idaho St.		P.O. Box 948,	St. Louis 1, Mo.....	818 Olive St.
Boston 1, Mass.....	140 Federal St.	Kalamazoo 3, Mich.....	220 1/2 W. Fourth St.	Salt Lake City 10, Utah.....	P.O. Box 779
Buffalo 2, N. Y.....	625 Delaware Ave.		P.O. Box 447		200 S. Main St.
Butte, Mont.....	P.O. Box 836, 103 N. Wyoming St.		114 Parkway Ave.	San Antonio 5, Texas.....	434 So. Main Ave.
Canton 4, Ohio.....	1226 Market Ave., N.	Kansas City 5, Mo.....	106 W. Fourteenth St.	San Diego 1, Calif.....	1240 Seventh Ave.
Cedar Rapids, Iowa.....	210 Second St., S.E.	Knoxville 16, Tenn.....	1301 Hannah Ave.	San Francisco 6, Calif.....	235 Montgomery St.
Charleston 28, W. Va.....	P.O. Box 2313	Lake Charles, La.....	P.O. Box 5212	San Jose 10, Calif.....	460 Park Ave.
	306 MacCorkle Ave., S.E.		422 Seventh St.	Savannah, Ga.....	40 East Bay St.
Charlotte 1, N. C.....	P.O. Box 1285	Lansing 8, Mich.....	814 Michigan National Tower	Seattle 11, Wash.....	P.O. Box 1858
	112 S. Tryon St.	Lexington, Ky.....	402 First National Bank Bldg.		710 Second Ave.
Chattanooga 2, Tenn.....	832 Georgia Ave.	Lincoln 8, Nebr.....	Sharpe Bldg., 206 S. 13th St.	Seattle 8, Wash.....	Avia. & Def., 220 Dawson St.
Chicago 80, Ill.....	840 S. Canal St.	Little Rock, Ark.....	103 W. Capitol Ave.	Shreveport, La.....	206 Beck Bldg.
Cincinnati 6, Ohio.....	2621 Victory Pkwy.	Los Angeles 54, Calif.....	212 N. Vignes St.	Sioux City 13, Iowa.....	572 Orpheum Electric Bldg.
Cleveland 4, Ohio.....	4966 Woodland Ave.	Los Angeles 5, Calif.....	Avia. & Def.,	South Bend 1, Ind.....	112 W. Jefferson Blvd.
Columbia 1, S. C.....	P.O. Box 1434, 1420 Lady St.		3325 Wilshire Blvd.	Spokane 4, Wash.....	S. 162 Post St.
Columbus 15, Ohio.....	40 S. Third St.	Louisville 2, Ky.....	455 S. Fourth St.	Springfield, Ill.....	607 E. Adams St.
Corpus Christi, Texas.....	205 N. Chaparral	Lubbock, Texas.....	P.O. Box 1464	Springfield 3, Mass.....	1387 Main St.
Dallas 2, Texas.....	1801 N. Lamar St.		3302 Avenue "A"	Stockton, Calif.....	11 So. San Joaquin St.
Davenport-Bettendorf, Iowa.....	P.O. Box 630	Macon, Ga.....	P.O. Box 506, 682 Cherry St.	Syracuse 1, N. Y.....	P.O. Box 1021, 3532 James St.
	1039 State St.	Madison 3, Wisc.....	16 N. Carroll St.	Tacoma 1, Wash.....	P.O. Box 1485
Dayton 2, Ohio.....	11 W. Monument Bldg.	Manchester, N. H.....	875 Elm St.		1216 Washington Bldg.
Dayton 9, Ohio, Avia. & Def.....	2600 Fort Hills Ave.	Medford, Ore.....	P.O. Box 1349, 107 E. Main St.	Tampa 1, Fla.....	P.O. Box 3092, 1206 North A St.
Denver 1, Colo.....	P.O. Box 2331	Memphis 3, Tenn.....	8 N. Third St.	Toledo 4, Ohio.....	420 Madison Ave.
	650 Seventeenth St.	Miami 29, Fla.....	P.O. Box 5062	Trenton 8, N. J.....	214 E. Hanover St.
Des Moines 9, Iowa.....	505 W. Fifth Ave.		25 S.E. Second Ave.	Tucson, Ariz.....	P.O. Box 710, 650 N. Sixth Ave.
Detroit 2, Mich.....	700 Antoinette St.	Midwest City, Okla.....	P.O. Box 5867	Tulsa 3, Okla.....	320 S. Boston Ave.
Duluth 2, Minn.....	14 W. Superior St.		Avia. & Def., 207 Post Office Bldg.	Utica 2, N. Y.....	258 Genesee St.
Elmira, N. Y.....	P.O. Box 971	Milwaukee 3, Wisc.....	940 W. St. Paul Ave.	Washington 5, D. C.....	777—14th St., N.W.
	Main and Woodlawn Aves.	Minneapolis 3, Minn.....	12 S. Sixth St.	Waterloo, Iowa.....	206 W. 4th St.
El Paso, Texas.....	215 No. Stanton	Mobile, Ala.....	704 Government St.	Wenatchee, Wash.....	P.O. Box 676
Erie 2, Pa.....	1001 State St.	Nashville 4, Tenn.....	1717 W. End Building		328 N. Wenatchee Ave.
Eugene, Ore.....	1170 Pearl St.	Newark 2, N. J.....	744 Broad St.	Wheeling, W. Va.....	40 Fourteenth St.
Evansville 19, Ind.....	P.O. Box 157	New Haven 6, Conn.....	129 Church St.	Wichita 2, Kan.....	200 E. First St.
	123 N.W. Fourth St.	New Orleans 12, La.....	837 Gravier St.	Williamston, N. C., P.O. Box 748, 115 E. Main St.	
Fairmont, W. Va.....	P.O. Box 1626	New York 22, N. Y.....	570 Lexington Ave.	Worcester 5, Mass.....	288 Grove St.
	310 Jacobs Bldg.	New York.....	Avia. & Def., Fed. Bldg.	York, Pa.....	56 N. Harrison St.
Hawaii: American Factors, Ltd., P.O. Box 3230, Honolulu 1			International Airport, Jamaica 30, N. Y.	Youngstown 7, Ohio.....	272 E. Indianola Ave.

Canada: Canadian General Electric Company, Ltd., Toronto

GENERAL ELECTRIC SERVICE SHOPS

WHEN YOU NEED SERVICE . . . These G-E service shops will repair, recondition, and rebuild your electric apparatus. The facilities are available day and night, seven days a week, for work in the shops or on your premises. Latest factory methods and genuine G-E renewal

parts are used to maintain peak performance of your equipment. For full information about these services, contact your nearest service shop or sales office.

* Denotes Aircraft Service Shops

Albany, N. Y.....	1097 Central Ave.	*Dallas, Texas.....	1135-1215 S. Lamar St.	Philadelphia 24, Pa.....	1040 E. Erie Ave.
Allentown, Pa.....	668 E. Highland St.	Dallas, Texas.....	3202 Manor Way	Pittsburgh 6, Pa.....	6519 Penn Ave.
Appleton, Wisc.....	Midway Industrial Area,	Davenport—Bettendorf, Iowa.....	1039 State St.	Portland 10, Oregon.....	2727 N.W. 29th Ave.
	County Truck, "P" P.O. Box 83	Decatur, Ill.....	2225 E. Logan St.	Richmond 24, Va.....	1403 Ingram Ave.
Atlanta—Chamblee, Ga.....	4639 Peachtree	Denver, Colo.....	3353 Larimer St.	Roanoke 7, Va.....	115 Albermarle Ave., S.E.
	Indus. Blvd.	Detroit 2, Mich.....	5950 Third Ave.	Sacramento, Calif.....	99 N. 17th St.
*Arkansas City, Kan.....	P.O. Box 526	Fl. Wayne, Ind.....	606 W. Superior St.	St. Louis 10, Mo.....	1115 East Rd.
Baltimore 30, Md.....	920 E. Fort Ave.	Houston 20, Texas.....	5534 Harvey Wilson Dr.	Salt Lake City 4, Utah.....	301 S. Seventh W. St.
Boston—Medford 55, Mass.....	3960 Mystic	Indianapolis 22, Ind.....	1740 W. Vermont St.	San Francisco 3, Calif.....	1098 Harrison St.
	Valley Pkwy.	Johnstown, Pa.....	841 Oak St.	Seattle 4, Wash.....	3422 First Ave., S.
Buffalo 11, N. Y.....	318 Urban St.	Kansas City 20, Mo.....	3525 Gardner Ave.	*Seattle 4, Wash.....	3422 First Ave., S.
Charleston 28, W. Va.....	306 MacCorkle Ave., S.E.	Los Angeles 1, Calif.....	6900 Stanford Ave.	Southington, Conn.....	45 Railroad Ave.
Charlotte, N. C.....	2328 Thrift Rd.	Louisville 6, Ky.....	2014 New Main St.	Spokane 3, Wash.....	S. 155 Sherman St.
Chicago 32, Ill.....	4360 W. 47th St.	Midland, Tex.....	3404 Bankhead Hwy.	Tampa 1, Fla.....	P.O. Box 1245
Cincinnati 2, Ohio.....	444 W. Third St.	Milwaukee 3, Wisc.....	940 W. St. Paul Ave.		Naval Indus. Res. Shipyard
*Cincinnati 3, Ohio.....	956 E. Court St.	Minneapolis 12, Minn.....	2025 49th Ave., N.	Toledo 4, Ohio.....	405 Dearborn St.
Cleveland 4, Ohio.....	4966 Woodland Ave.	New Orleans, La.....	2815 N. Robertson St.	Wheeling, W. Va.....	2050 National Rd.
Columbus 23, Ohio.....	2128 Eakin Rd.	New York—N. Bergen, N. J.....	6001 Tonnelle Ave.	York, Pa.....	54 N. Harrison St.
Corpus Christi, Texas.....	115 Busse St.	Oakland, Calif.....	1525 Peralta St.	Youngstown 7, Ohio.....	272 E. Indianola Ave.
		*Ontario, Calif.....	Ont. Int'l Airport		

INSTRUMENT DEPARTMENT, GENERAL ELECTRIC COMPANY, WEST LYNN, MASS.