



EQ® NORMAL-DUTY PANELBOARDS
SELECTION, APPLICATION, PRICING

NLA BOLTED — UNASSEMBLED (Breakers Not Included)

225 AMPERE MAINS

240 VOLTS AC 100A MAX. BRANCH

PANELBOARDS: Listed by Underwriters' Laboratories, Inc., under "Panel Base Assemblies" File #E23615. Meet Federal Specification W-P-115a dated January 7, 1963, for Type I, Class 1.

SERVICE: 240 VOLT AC Maximum. 1 Phase, 2 Wire; 1 Phase, 3 Wire; 3 Phase, 3 Wire; or 3 Phase, 4 Wire.

MAINS: Main Lug Panels

Rating Amperes	Connectors Suitable for Cu or Al
100, 125 225	1—#1-#1/0 Awg 1—#6 Awg-250 MCM


Main Breaker Panels

Rating Amperes	Breaker Frame	Connectors Suitable for Cu or Al
50, 100 225	E QJ	1—#14-#1/0 Awg 1—#4 Awg-300 MCM

BRANCH BREAKERS: EQ-B bolted. Breakers rated 5000 amperes symmetrical Interrupting Capacity based on NEMA or Underwriters' test procedures. Meet Federal Specification W-C-375a dated February 18, 1965, for Class 1 circuit breakers.

BOXES: 15" Wide, 4 3/4" Deep.

GUTTERS: 4" Top, bottom and sides.

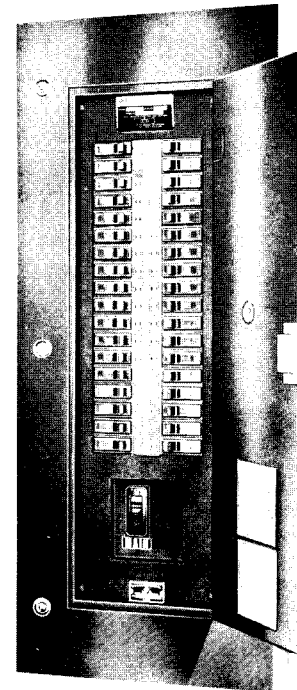

SEE REVERSE SIDE FOR SELECTION DATA



EQ® NORMAL-DUTY PANELBOARDS

SELECTION, APPLICATION, PRICING

NLA BOLTED — UNASSEMBLED (Breakers Not Included), 225A MAINS MAX.

Mains Rating Amperes	Max. No. of Poles	COMPLETE ENCLOSURE Less Breakers			Box Only			Front Only	
		Cat. No. Add Suffix S-Surf. F-Flush	List Price	Ship. Wgt. Lb./Std. Pkg. of 1	Cat. No.	List Price	Height Inches	Flush Cat. No. for Surface Change F to S	List Price
NLA-3 1 PHASE, 3 WIRE SN 120/240 VOLT AC									
MAIN LUG PANELS									
100	12	NLA12-3L	\$89.	32	15B20	\$21.	20	15F20	\$28.
	18	NLA18-3L	100.	39	15B23	22.	23	15F23	29.
125 [▲]	24	NLA24-3L [▲]	112.	47	15B26	23.	26	15F26	30.
225	30	NLA30-3L	128.	56	15B29	24.	29	15F29	31.
	36	NLA36-3L	138.	65	15B32	25.	32	15F32	32.
	42	NLA42-3L	148.	74	15B35	26.	35	15F35	34.
MAIN BREAKER PANELS † 2 POLE									
100	12	NLA12-3AB	149.	39	15B23	22.	23	15F23	29.
	18	NLA18-3AB	160.	48	15B26	23.	26	15F26	30.
	20	NLA20-3AB	166.	61	15B29	24.	29	15F29	31.
225	30	NLA30-3AB	364.	72	15B35	26.	35	15F35	34.
	36	NLA36-3AB	375.	81	15B38	27.	38	15F38	35.
	42	NLA42-3AB	386.	92	15B41	28.	41	15F41	36.
NLA-4 3 PHASE, 4 WIRE SN 120/208 VOLT AC									
MAIN LUG PANELS									
100	12	NLA12-4L	101.	33	15B20	21.	20	15F20	28.
	18	NLA18-4L	103.	40	15B23	22.	23	15F23	29.
	24	NLA20-4L	113.	48	15B26	23.	26	15F26	30.
225	30	NLA30-4L	134.	57	15B29	24.	29	15F29	31.
	36	NLA36-4L	152.	66	15B32	25.	32	15F32	32.
	42	NLA42-4L	163.	75	15B35	26.	35	15F35	34.
MAIN BREAKER PANELS † 3 POLE									
50	12	NLA12-4AB	156.	42	15B23	22.	23	15F23	29.
100	18	NLA18-4AB	193.	50	15B26	23.	26	15F26	30.
	24	NLA20-4AB	204.	59	15B29	24.	29	15F29	31.
	30	NLA30-4AB	215.	64	15B32	25.	32	15F32	32.
225	36	NLA36-4AB	445.	83	15B38	27.	38	15F38	35.
	42	NLA42-4AB	455.	94	15B41	28.	41	15F41	36.

† Main Circuit Breaker—Installed and included in List Price for Complete Enclosure only.

▲ Available on special order with 225-ampere Main Lugs, List Price \$117.00.

EQ-B BREAKERS

Rating Amperes	Cat. No.	List Price
1 POLE 120/240 VOLT AC		
15	BQ1-B015	\$3.90
20	BQ1-B020	
30	BQ1-B030	
40	BQ1-B040	
50	BQ1-B050	
2 POLE † 120/240 VOLT AC		
15	BQ2-B015	8.60
20	BQ2-B020	
30	BQ2-B030	
40	BQ2-B040	
50	BQ2-B050	
60	BQ2-B060	
70	BQ2-B070	16.40
90	BQ2-B090	22.00
100	BQ2-B100	22.00
2 POLE † † 240 VOLT AC*		
15	BQ2-H015	22.00
20	BQ2-H020	
30	BQ2-H030	
40	BQ2-H040	
50	BQ2-H050	
60	BQ2-H060	
70	BQ2-H070	
90	BQ2-H090	25.20
100	BQ2-H100	
3 POLE † † 240 VOLT AC*		
15	BQ3-B015	27.30
20	BQ3-B020	
30	BQ3-B030	
40	BQ3-B040	
50	BQ3-B050	
70	BQ3-B070	34.70
90	BQ3-B090	40.40
100	BQ3-B100	40.40
1 POLE † 120/240 VOLT AC		
15	BQ1-B015L	6.90
20	BQ1-B020L	
30	BQ1-B030L	7.90
40	BQ1-B040L	
50	BQ1-B050L	

† Common Trip.

† † 10,000-ampere UL interrupting capacity.

* Suitable for 3-phase, 3-wire 240-volt systems.

ACCESSORIES

Description	Cat. No.	List Price
2-Pole Tie Handle	QTH-2	\$.20
Handle Block Lock-Off Device	QL-1	.30
Padlocking Device 1, 2, or 3 Pole	QLD-3	.90
Filler Plate	QF-1	.30
Sub-Feed Lug Kit—100A	EQ-100SF	24.00
Sub-Feed Lug Kit—225A	EQ-225SF	28.00