



EQ® NORMAL-DUTY PANELBOARDS

SELECTION, APPLICATION & PRICING

NPA PLUG-IN—UNASSEMBLED (Breakers Not Included)
225 AMPERE MAINS MAX.
240 VOLTS AC 100 MAX. BRANCH

PANELBOARDS: Listed by Underwriters' Laboratories, Inc., under "Panel Base Assemblies" File #E23615. Meet Federal Specification W-P-115a dated January 7, 1963, for Type I, Class 1.

SERVICE: 240 VOLT AC Maximum. 1 Phase, 2 Wire; 1 Phase, 3 Wire; 3 Phase, 3 Wire; or 3 Phase, 4 Wire.

MAINS: Main Lug Panels

Rating Amperes	Connectors Suitable for Cu or Al
100, 125	1—#1-#1/0 Awg
225	1—#6 Awg -250 MCM


Main Breaker Panels

Rating Amperes	Breaker Frame	Connectors Suitable for Cu or Al
100	E	1—#14-#1/0 Awg
225	QJ	1—#4 Awg -300 MCM

BRANCH BREAKERS: EQ-P plug-in, rated 5000 amperes symmetrical Interrupting Capacity based on NEMA and Underwriters' test procedures. Meet Federal Specification W-C-375a dated February 18, 1965, for Class 1 circuit breakers. Circuit breakers are also available with 10,000 amperes interrupting capacity.

BOXES: 15" Wide, 4¾" Deep.

GUTTERS: 4" Top, Bottom and Sides.

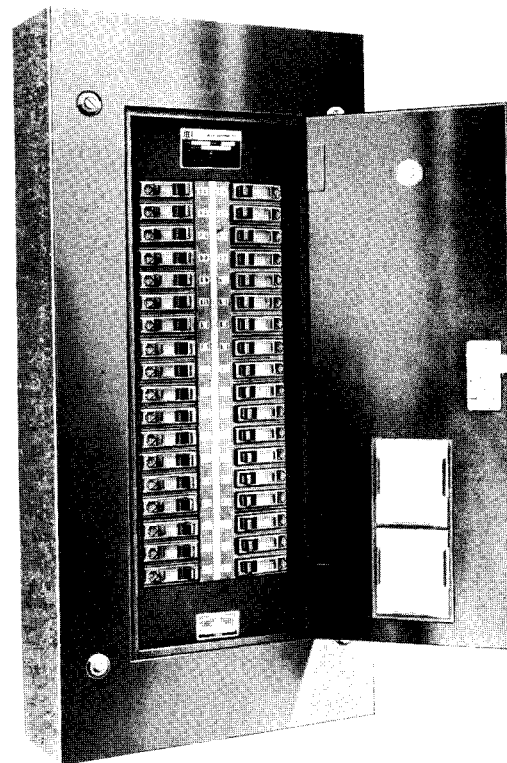

SEE REVERSE SIDE FOR SELECTION DATA



EQ® NORMAL-DUTY PANELBOARDS

SELECTION, APPLICATION & PRICING

NPA PLUG-IN—UNASSEMBLED (Breakers Not Included), 225A MAINS MAX.

Mains Rating Amperes	Max. No. of Poles	COMPLETE ENCLOSURE— Less Breakers			Box Only			Front Only	
		Cat. No. Add Suffix S-Surface F-Flush	List Price	Ship. Wgt. Lb./Std. Pkg. of 1	Cat. No.	List Price	Height Inches	Flush Cat. No. for Surface Change F to S	List Price
NPA-3 1 PHASE, 3 WIRE SN, 120/240 VOLT AC									
MAIN LUG PANELS									
100	12 18	NPA12-3L NPA18-3L	\$89. 100.	32 39	15B20 15B23	\$21. 22.	20 23	15F20 15F23	\$28. 29.
125 ^A	24	NPA24-3L ^A	112.	47	15B26	23.	26	15F26	30.
225	30 36 42	NPA30-3L NPA36-3L NPA42-3L	128. 138. 148.	56 65 74	15B29 15B32 15B35	24. 25. 26.	29 32 35	15F29 15F32 15F35	31. 32. 34.
MAIN BREAKER PANELS † 2 POLE									
100	12 18 20	NPA12-3AB NPA18-3AB NPA20-3AB	149. 160. 166.	39 48 61	15B23 15B26 15B29	22. 23. 24.	23 26 29	15F23 15F26 15F29	29. 30. 31.
225	30 36 42	NPA30-3AB NPA36-3AB NPA42-3AB	364. 375. 386.	72 81 92	15B35 15B38 15B41	26. 27. 28.	35 38 41	15F35 15F38 15F41	34. 35. 36.
NPA-4 3 PHASE, 4 WIRE SN, 120/208 VOLT AC									
MAIN LUG PANELS									
100	12 18 24 30	NPA12-4L NPA18-4L NPA24-4L NPA30-4L	101. 103. 113. 134.	33 40 48 57	15B20 15B23 15B26 15B29	21. 22. 23. 24.	20 23 26 29	15F20 15F23 15F26 15F29	28. 29. 30. 31.
225	36 42	NPA36-4L NPA42-4L	152. 163.	66 75	15B32 15B35	25. 26.	32 35	15F32 15F35	32. 34.
MAIN BREAKER PANELS † 3 POLE									
50	12	NPA12-4AB	156.	42	15B23	22.	23	15F23	29.
100	18 24 30	NPA18-4AB NPA24-4AB NPA30-4AB	193. 204. 215.	50 59 64	15B26 15B29 15B32	23. 24. 25.	26 29 32	15F26 15F29 15F32	30. 31. 32.
225	36 42	NPA36-4AB NPA42-4AB	445. 455.	83 94	15B38 15B41	27. 28.	38 41	15F38 15F41	35. 36.

† Main Circuit Breaker—Installed and included in List Price for Complete Enclosure only.

▲ Available on special order with 225A Main Lugs, List Price \$117.00.

EQ-P BREAKERS

Rating Amperes	Cat. No.	List Price
1 POLE 120/240 VOLT AC		
15 20 30 40 50	QP1-B015 QP1-B020 QP1-B030 QP1-B040 QP1-B050	\$3.10
2 POLE † 120/240 VOLT AC		
15 20 30	QP2-B015 QP2-B020 QP2-B030	7.30
40 50 60	QP2-B040 QP2-B050 QP2-B060	
70 90 100	QP2-B070 QP2-B090 QP2-B100	
2 POLE † ♦ 240 VOLT AC*		
15 20 30	QP2-H015 QP2-H020 QP2-H030	15.20
40 50 60	QP2-H040 QP2-H050 QP2-H060	
70 90 100	QP2-H070 QP2-H090 QP2-H100	
3 POLE † ♦ 240 VOLT AC		
15 20 30 40 50	QP3-B015 QP3-B020 QP3-B030 QP3-B040 QP3-B050	24.80
70 90 100	QP3-B070 QP3-B090 QP3-B100	32.00 36.00 36.00
1 POLE ♦ 120/240 VOLT AC		
15 20	QP1-B015L QP1-B020L	6.20
30 40 50	QP1-B030L QP1-B040L QP1-B050L	7.10

† Common Trip.

* Suitable for 3-phase, 3-wire, 240-volt system.

♦ 1-, 2- and 3-pole, EQ-P breakers shown in tables above as indicated, have a 10,000-ampere UL interrupting capacity.



EQ® NORMAL-DUTY PANELBOARDS

SELECTION, APPLICATION & PRICING

NPA PLUG-IN—UNASSEMBLED (Breakers Not Included)
600 AMPERE MAINS MAX.
240 VOLTS AC 100A MAX. BRANCH

PANELBOARDS: Listed by Underwriters' Laboratories, Inc., under "Panel Base Assemblies" File #E23615. Meet Federal Specification W-P-115a dated January 7, 1963, for Type I, Class 1.

SERVICE: 240 VOLT AC Maximum. 1 Phase, 2 Wire; 1 Phase, 3 Wire; 3 Phase, 3 Wire; or 3 Phase, 4 Wire.


MAINS: Main Lug Panels

Rating Amperes	Connectors Suitable for Cu or Al
400	{ 1—#4 Awg -600 MCM, or 2—#6 Awg -250 MCM
600	2—#4 Awg -600 MCM

BRANCH BREAKERS: EQ-P plug-in, rated 5000 amperes symmetrical interrupting capacity based on NEMA and Underwriters' test procedures. Meet Federal Specification W-C-375a dated February 18, 1965, for Class 1 circuit breakers. Circuit breakers are also available with 10,000 amperes interrupting capacity.

BOXES: 20" Wide, 5¾" Deep.

GUTTERS: 8" Top and Bottom, 6½" Sides.

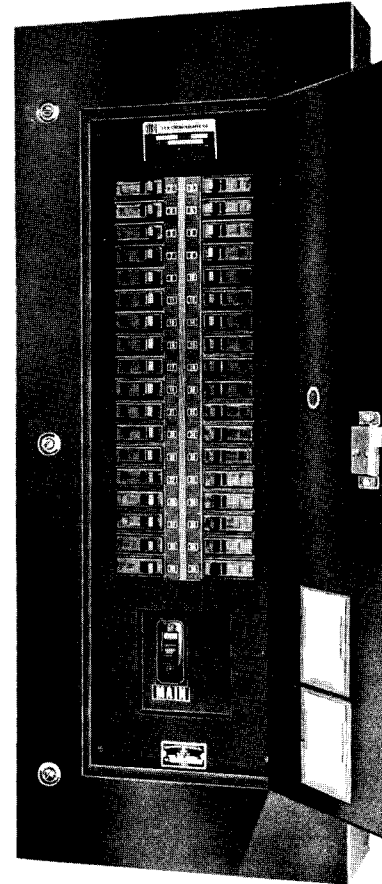

SEE REVERSE SIDE FOR SELECTION DATA



EQ[®] NORMAL-DUTY PANELBOARDS

SELECTION, APPLICATION & PRICING

NPA PLUG-IN—UNASSEMBLED (Breakers Not Included), 600A MAINS MAX.

Mains Rating Amperes	Max. No. of Poles	COMPLETE ENCLOSURE— Less Breakers			Box Only			Front Only	
		Cat. No. Add Suffix S-Surface F-Flush	List Price	Ship. Wgt. Lb./Std. Pkg. of 1	Cat. No.	List Price	Height Inches	Flush Cat. No. for Surface Change F to S	List Price

NPA-3 1 PHASE, 3 WIRE SN, 120/240 VOLT AC

MAIN LUG PANELS									
400	30	NPA4330-L	\$185.	35	20C41	\$31.	41	20F41	\$44.
	42		204.	42					
600	30	NPA6330-L	226.	40	20C41	31.	41	20F41	44.
	42		246.	47					

NPA-4 3 PHASE, 4 WIRE SN, 120/208 VOLT AC

MAIN LUG PANELS									
400	30	NPA4430-L	201.	38	20C41	31.	41	20F41	44.
	42		222.	45					
600	30	NPA6430-L	243.	43	20C41	31.	41	20F41	44.
	42		264.	50					

ACCESSORIES

Description	Cat. No.	List Price
2-Pole Tie Handle.....	QTH-2	\$.20
Handle Block Lock-Off Device.....	QL-1	.30
Padlocking Device 1, 2, or 3 Pole...	QLD-3	.90
Filler Plate.....	QF-1	.30
Sub-Feed Lug Kit—100A.....	EQ-100SF	24.00
Sub-Feed Lug Kit—225A.....	EQ-225SF	28.00