



Westinghouse Electric Corporation
Distribution and Control Business Unit
Standard Distribution Products Division
Pittsburgh, Pennsylvania, U.S.A. 15220

Renewal Parts Data


30-190

Page 1

March 1991
Supersedes Price List 30-190, pages 1-16,
dated March 15, 1990
Mailed to: E, D, C/30-100A


Safety Switch Renewal Parts

- General Duty
- Heavy Duty

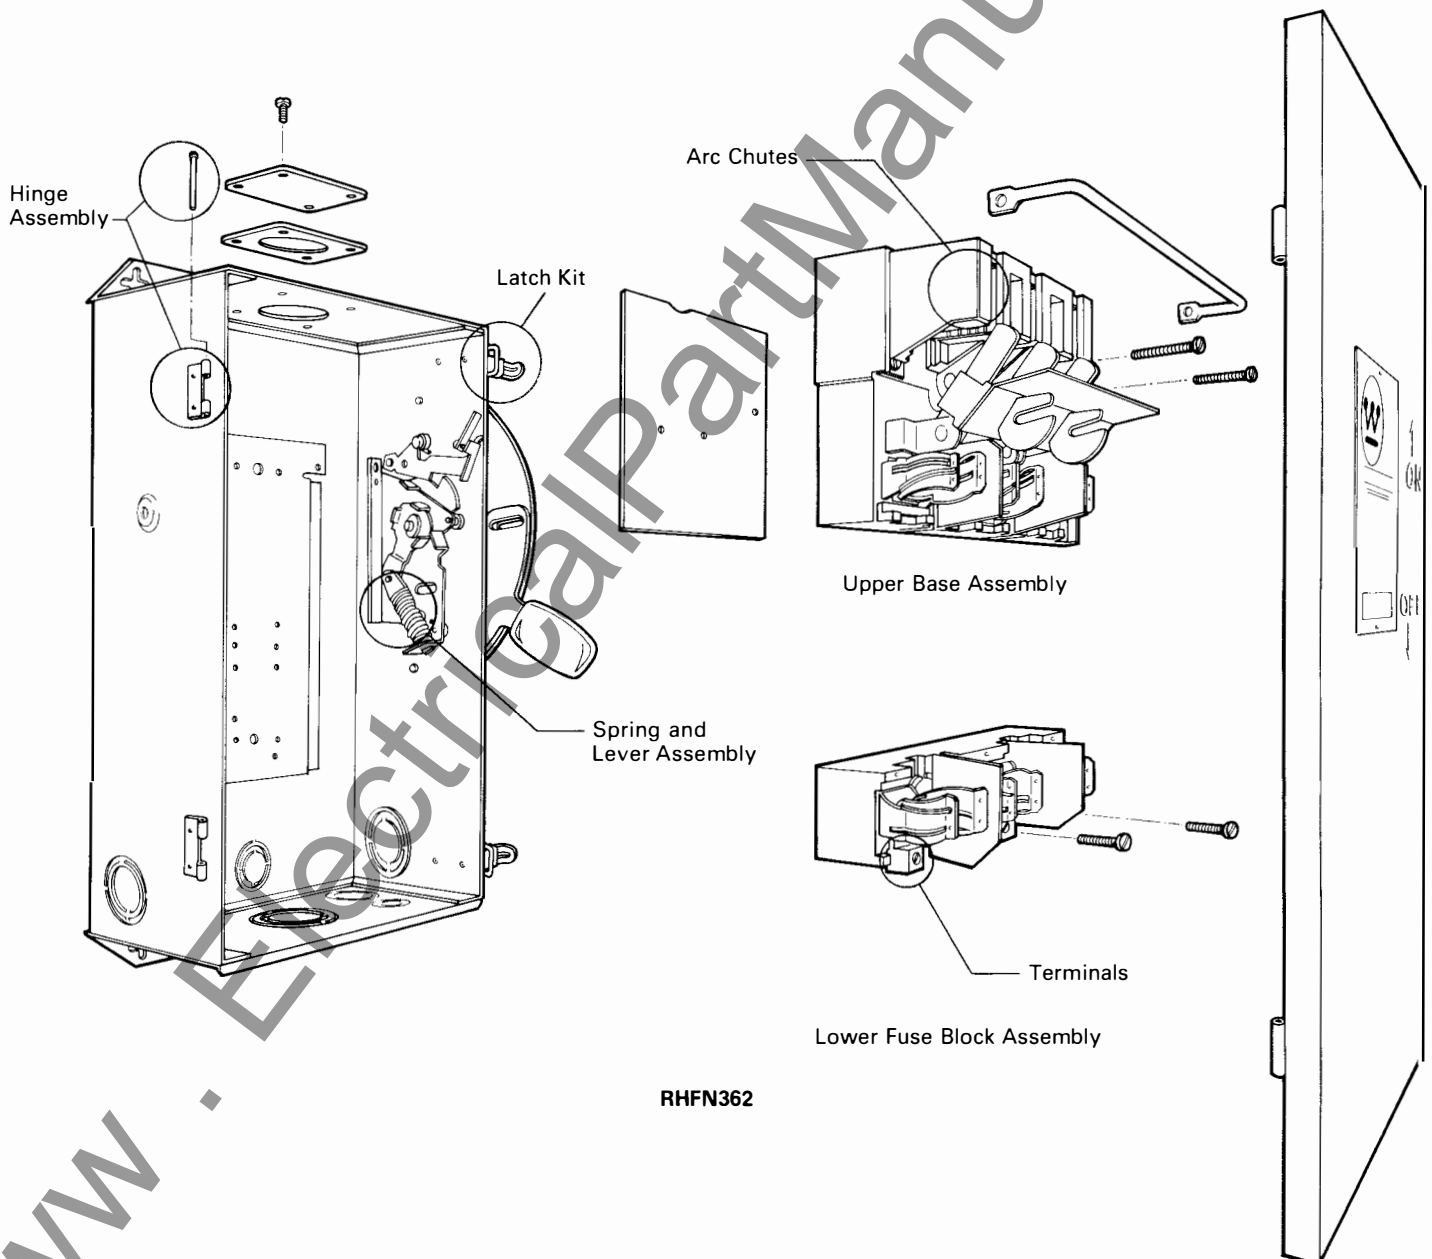


RHFN362

Heavy Duty Safety Switches Features

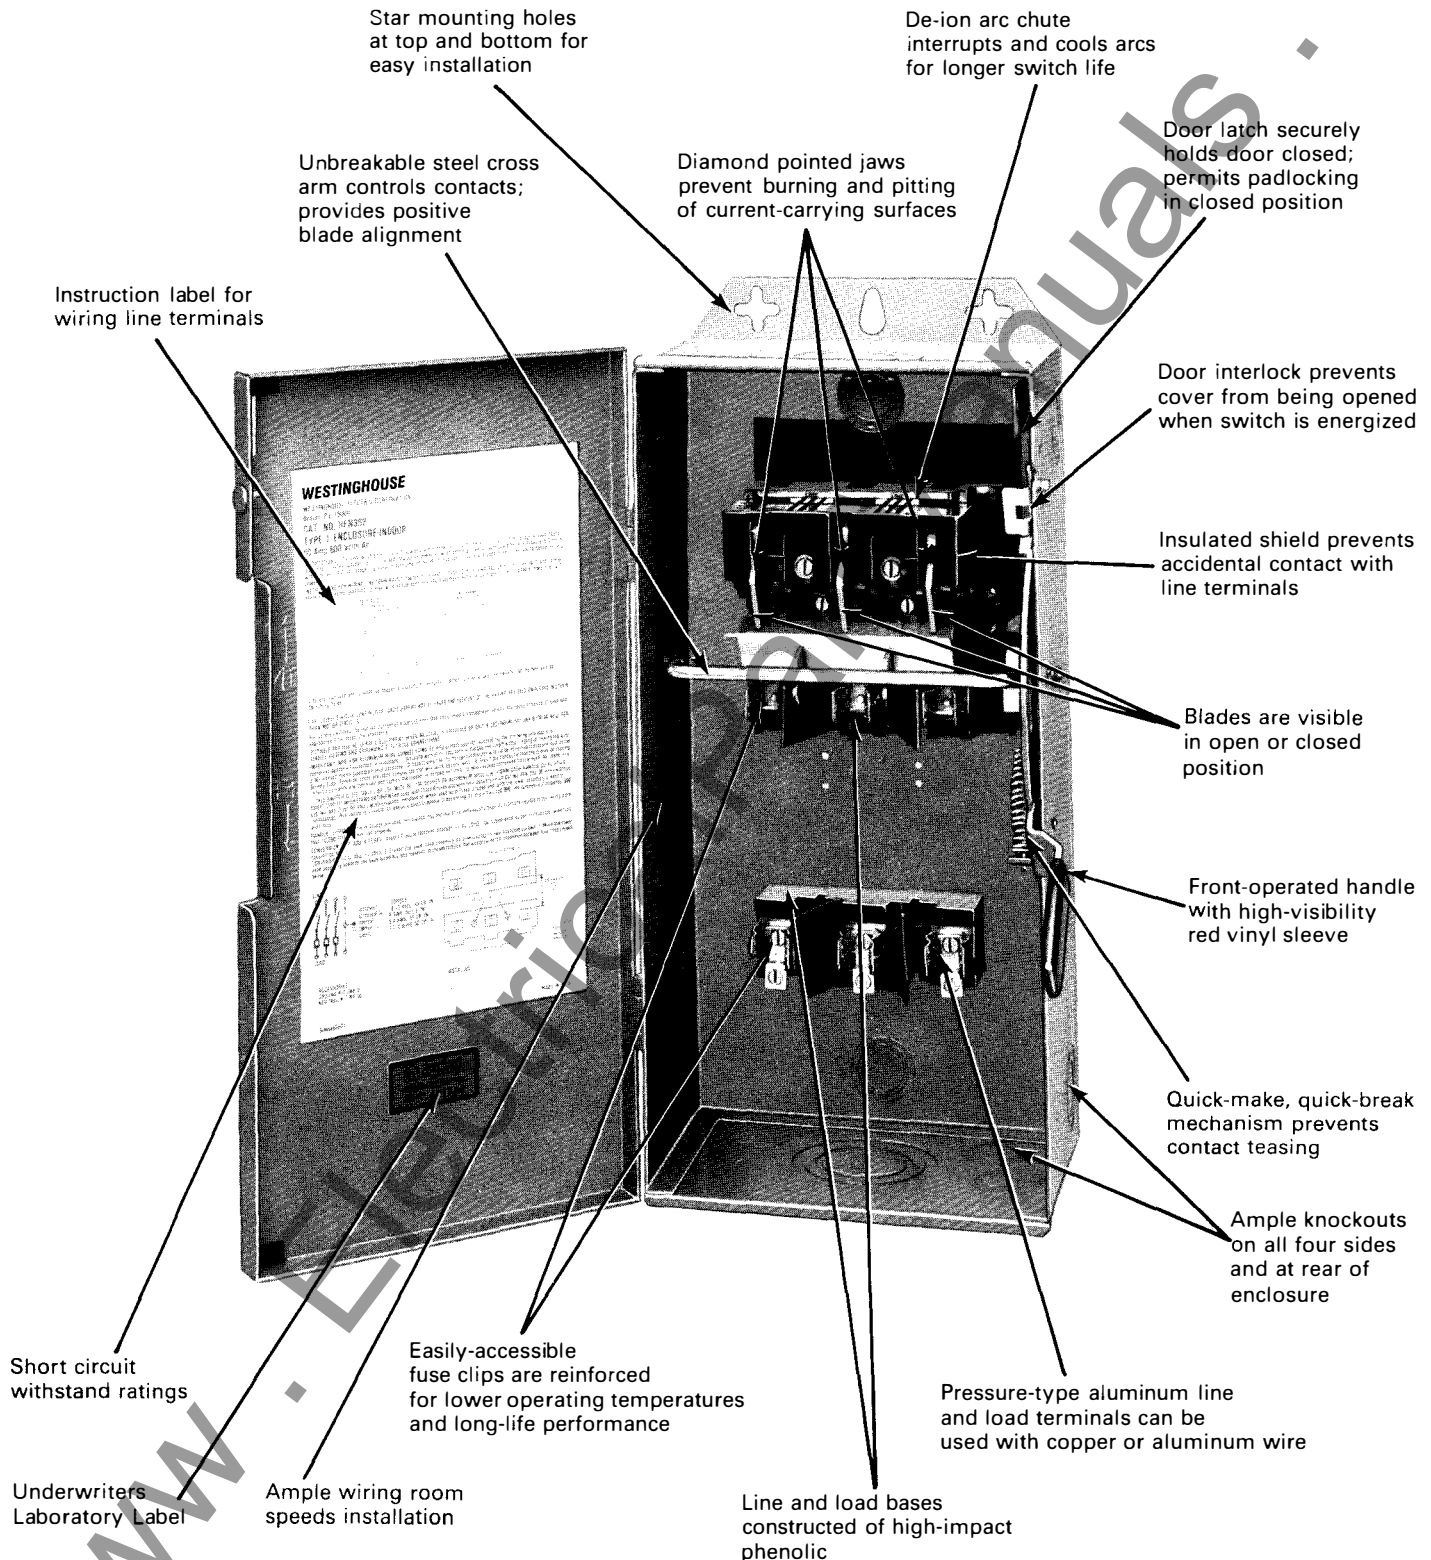


DANGER: Hazard of electrical shock or burn. Be sure to TURN OFF POWER supply before working on equipment.

Heavy Duty Safety Switches Features




Rating Identification:

Embossed nameplate enhances appearance and permanently identifies Westinghouse name, catalog numbers, volts ampere and horsepower ratings. No need to open door to obtain data.




Dual Purpose Interlock:

Prevents switch from being thrown ON with cover open; prevents cover from being opened unless switch is OFF. Authorized personnel can bypass both conditions by inserting screwdriver into interlock defeater (cover slot located above handle.)




Durable Finish:

Entire enclosure is bonderized inside and out and coated with baked on enamel for maximum durability and resistance to rust. Scratches cannot spread even though they extend through to the bare metal.




Teaseproof Switch Mechanism:

Over-center design with positive drive spring action maximizes strength of quick-make, quick-break switch mechanism. Prevents contact teasing. Handle operates independently of cam and crossbar, allowing cover to be opened or closed in the unlikely event of drive spring breakage.




Front Operated Handle:

An integral part of switch mechanism, the easily accessible handle permanently controls contacts, permits close ganging, does *not* disconnect when door is opened. Red vinyl sleeve provides high visibility; indicates handle position (down for OFF; up for ON).




Steel Cross Arm and Yokes:

Steel yokes in an impact-resistant glass polyester insulating block firmly engage steel cross-arm that drives the moving blades and provides positive blade alignment.




Padlocking:

Operating handle can be padlocked in OFF position by three padlocks with $\frac{3}{8}$ " hasps. Prevents closing of contacts – an essential requirement for heavy-duty industrial applications. Handle can be padlocked in ON position by drilling hole in handle at position marked "X".



Diamond-Pointed Break-Jaws:

Moving contacts extend beyond the break-jaws, permitting the breaking arc to travel along the outside non current-carrying edges of jaws and blades. Prevents burning and pitting of current-carrying surfaces.



Removable Interior Parts:

All interior parts are easily removable from the front if replacement is necessary.



De-Ion Arc Chute:

Prevents arc damage by interrupting and cooling hot arcs. Molded material of chute is carbonizing and track resistant. Prolongs switch life; allows maximum horsepower ratings permitted by UL.

Table of Contents


	Page
GENERAL DUTY SAFETY SWITCHES	
Base Assembly Photos	5
Style Numbers for 30A 240V - 100A 240V	6
Style Numbers for 200A 240V - 600A 240V	6
HEAVY DUTY SAFETY SWITCHES	
Base Assembly Photos	7
Arc Chute Photos	7
Terminals	7
Style Numbers for 30A 250V - 60A 600V	8
Style Numbers for 100A 250V - 200A 600V	9
Style Numbers for 400A 250V - 600A 600V	10
Style Numbers for 800A 250V - 1200A 600V	11

CIRCUIT PROTECTIVE
DEVICES DIVISION
WESTINGHOUSE ELECTRIC CORPORATION
Beaver, Pa. 15009
CAT. NO. HFN265
TYPE 1 ENCLOSURE-INDOOR
400 Amp 240 Volts Ac

INSTRUCTIONS

1. Turn off switch before proceeding with any maintenance.
2. Confirm with voltmeter that no voltage is present before removing or installing fuses.
3. Turn off and lock out all power to switch before proceeding with any other maintenance.
4. Confirm with voltmeter that no voltage is present in line side terminals.
5. Replace all parts and close cover of enclosure before turning power on.

Instructions for Installing Fuse



Switch MUST BE OFF.
Loosen line clamp bolts sufficiently to move clamp 1/4 turn as shown in can for pole picture. Note: It is not necessary to remove bolts.
Insert fuse and return clamps to extreme position as shown in left pole picture. Then tighten bolts.
Lugs are suitable for copper conductors only.

FOR FUSIBLE SWITCHES: CONTINUOUS LOAD CURRENT NOT TO EXCEED 80 PERCENT OF THE RATING OF FUSES EMPLOYED IN OTHER THAN MOTOR CIRCUITS.

For fusible switches the starting current of motors of more than the standard horsepower ratings may require the use of fuses with appropriate time delay characteristics.

SUITABLE FOR USE AS SERVICE EQUIPMENT WHEN NEUTRAL IS PROVIDED OR ORDER GROUNDING KIT GNK-60 FOR SERVICE GROUND AND GROUNDING ELECTRODE CONNECTIONS.

NOT FOR USE AS MOTOR CONTROLLER OVER 100 HORSEPOWER. THIS SWITCH IS SUITABLE FOR USE WITH 60/75 COPPER WIRE.

LINE CONNECTOR RANGES
250-750 MCM CU AL ONLY
2-300 MCM 3/0
*MAIN WIRE SIZE & TORQUE INFO
250-750 MCM-500 IN. LBS.
2-300 MCM 3/0
NEUTRAL WIRE SIZE & TORQUE INFO
#4-150 MCM CU AL
OR 2-250 MCM 1/0
375 IN. LBS.

LOAD
509A92601


SHORT CIRCUIT WITHSTAND RATING

When used with Class R fuses and with field conversion kit Cat. No. RFX-5 properly installed or when used with Class J fuses and with lower base assembly properly repackaged, this switch is suitable for use on a circuit capable of delivering not more than 100,000 RMS symmetrical amperes, 240 volts maximum.

DANGER: - Unless Class R or J fuses are used, this switch may become a casualty hazard on circuits capable of delivering more than 10,000 RMS symmetrical amperes.

CONVERSION TO CLASS R FUSES: - Install Class R rejection pins to the LINE side fuse holders as per instructions with conversion kit.

CONVERSION TO CLASS J FUSES: - 1. Loosen the lower base assembly by disengaging its two mounting bolts. 2. Move the lower base assembly towards the upper base assemblies and secure in the set of holes that will provide the dimension between fuse holders shown below.



IMPORTANT INFO. FOR ALUMINUM WIRE CONNECTIONS.

TO HELP PROTECT AGAINST OVERHEATING THE FOLLOWING PROCEDURE IS RECOMMENDED FOR ALUMINUM TERMINATIONS.

1. Strip the wire of its insulation to the desired length without ringing or nicking the wire.
2. Wire brush the stripped portion of conductor.
3. Thoroughly coat the stripped conductor with oxide inhibiting compound such as the Burndy Corp. Penetrox (There are other compounds that will work equally well).
4. Insert the conductor into the connector making certain all strands are contained and tighten the connector screws securely.
5. Wipe excess compound from around the connectors.

ACCESSORIES:
GROUND KIT GNK-60
NEUTRAL KIT NKK-400 or RNK-400

INSTALLED BY:

TEL.

MADE IN U.S.A.

CIRCUIT PROTECTIVE
DEVICES DIVISION
WESTINGHOUSE ELECTRIC CORPORATION
Beaver, Pa. 15009

CAT. NO. HUN361

TYPE 1 ENCLOSURE - INDOOR


30 amp 600 Volts Ac

INSTRUCTIONS

1. Turn off switch before proceeding with any maintenance.
2. Turn off and lock out all power to switch before proceeding with any other maintenance.
3. Confirm with voltmeter that no voltage is present in line side terminals.
4. Replace all parts and close cover of enclosure before turning power on.

INSTRUCTIONS FOR WIRING LINE TERMINALS

1. Switch must be off.
2. Loosen 2 arc screws (approx. 5 turns) (see fig. 1) and slide arc box to lower position (see fig. 2).
3. After wiring line terminals return arc box to extreme upper position and tighten screws. (See fig. 1).



Line and load lugs are suitable for copper or aluminum conductors. When used as a two pole switch, use the two outside Switching Poles.

SUITABLE FOR USE AS A SERVICE EQUIPMENT WHEN NEUTRAL IS PROVIDED OR ORDER GROUNDING KIT GNK-6 (30-60 AMP) FOR SERVICE GROUND AND GROUNDING ELECTRODE CONNECTIONS.

SHORT CIRCUIT WITHSTAND RATING

This switch is suitable for use on a circuit capable of delivering not more than 10,000 rms symmetrical amperes, 600 volts maximum when protected by fuses (Class H or K) or circuit breaker. With Class R or J fuses, this switch is suitable for use on a circuit capable of delivering not more than 100,000 rms symmetrical amperes, 600 volts max. Protective fuses or circuit breaker rated not to exceed the ampere rating of this switch.

THIS SWITCH IS SUITABLE FOR USE WITH 60/75C COPPER OR ALUMINUM WIRE.

LINE CONNECTOR RANGES CU-AL #14-2

IMPORTANT INFO. FOR ALUMINUM WIRE CONNECTIONS.

TO HELP PROTECT AGAINST OVERHEATING THE FOLLOWING PROCEDURE IS RECOMMENDED FOR ALUMINUM TERMINATIONS.

1. Strip the wire of its insulation to the desired length without ringing or nicking the wire.
2. Wire brush the stripped portion of conductor.
3. Thoroughly coat the stripped conductor with oxide inhibiting compound such as the Burndy Corp. Penetrox (There are other compounds that will work equally well).
4. Insert the conductor into the connector making certain all strands are contained and tighten the connector screws securely.
5. Wipe excess compound from around the connectors.

LINE



Insulated
Groundable
Neutral
(when
used)

TORQUE
14-10 AWG. 35 LB. IN.
8 AWG. 40 LB. IN.
6-4 AWG. 45 LB. IN.

ACCESSORIES:
GROUND KIT GNK-6
NEUTRAL KIT NKK-60

INSTALLED BY:

TEL:

509A88H01


MADE IN U.S.A.

DANGER: Hazard of electrical shock or burn. Be sure to TURN OFF POWER supply before working on equipment.




General Duty Safety Switches

Representative of General Duty Switch, base assembly. Note: style number includes all components: base, current carrying assys., terminals and neutral where applicable, see page 6.

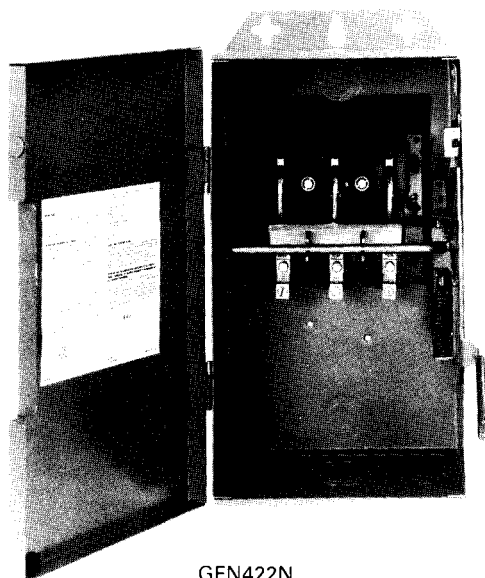


GFN422N


General Duty non-fusible base assembly 60A unit, style number covers complete unit as shown. Note: base, current carrying parts, and terminals, see page 6.

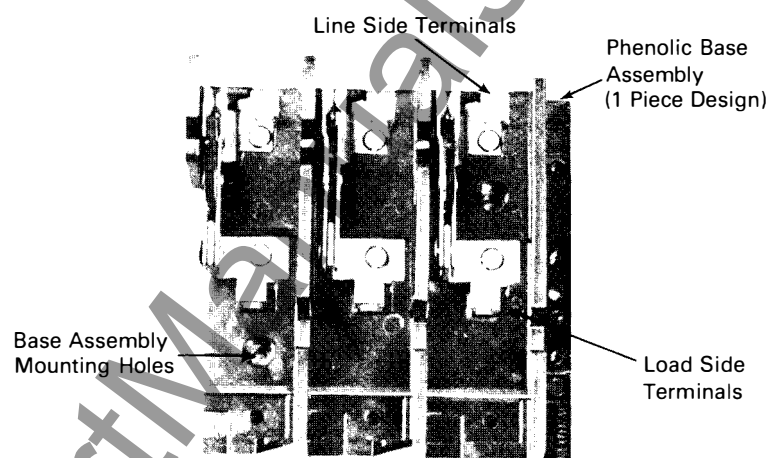

General Duty fusible 100A base assembly units contain all current carrying parts and terminals. Note: pole on right has the neutral assembly built into the unit, see page 6.

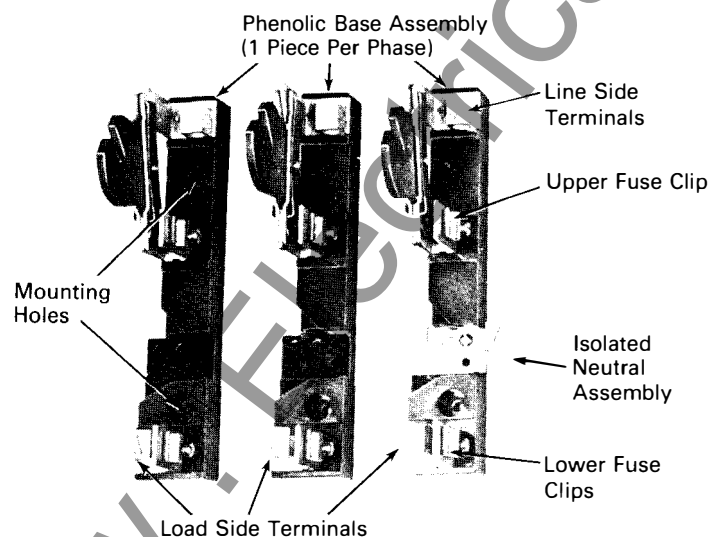

Representative units for General and Heavy Duty 400 and 600A switches, upper base, one per pole, lower base one for total number of poles. Note: style numbers for Heavy Duty units also contain arc chute, see pages 8-11.

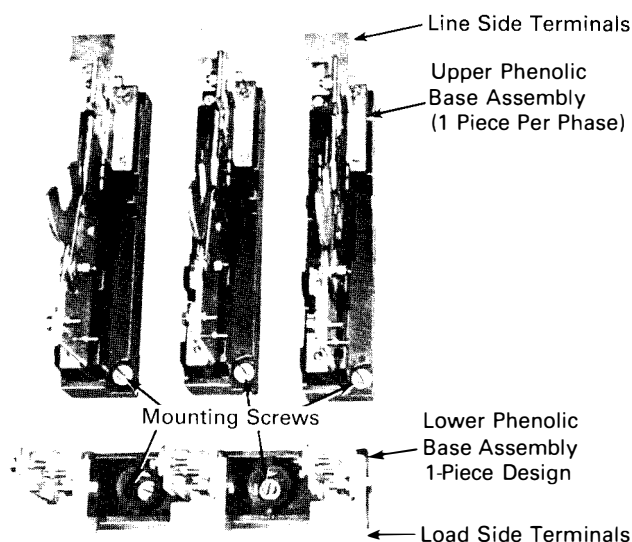

DANGER: Hazard of electrical shock or burn. Be sure to TURN OFF POWER supply before working on equipment.



General Duty Safety Switches

Catalog Number	Qty. Req'd.	Base Assy. Style No.	Qty. Req'd.	Base Assy. w/Neutral Style No.	Qty. Req'd.	Line & Load Terminals ① Style No.
30A 240V						
GFN221	1	371D884G11				
RGFN221	1	371D884G11				
GFN321N			1	371D884G13		
RGFN321N			1	371D884G13		
GFN421N			1	371D884G15		
RGFN421N			1	371D884G15		
RGUN221	1	371D884G10			6	750B437G06
GUN321	1	371D884G14			6	750B437G06
RGUN321	1	371D884G14			6	750B437G06
60A 240V						
GFN322N			1	372D150G11	6	627B213G03
RGFN322N			1	372D150G11	6	627B213G03
GFN422N			1	372D150G13	6	627B213G03
RGFN422N			1	372D150G13	6	627B213G03
RGUN222	1	372D150G10			6	627B213G03
GUN322	1	372D150G12			6	627B213G03
RGUN322	1	372D150G12			6	627B213G03

†For a complete description of catalog numbers see Safety Switch Catalog 30-150, Price List 30-125.

① Each style number represents one terminal. Standard package quantity is (6) terminals.

Catalog Number	Qty. Req'd.	Upper Base Assy. Style No.	Qty. Req'd.	Arc Chute Style No.	Qty. Req'd.	Lower Fuse Block Style No.	Qty. Req'd.	Line & Load Terminals ① Style No.
400A 240V								
GFN325N②	2	1229C81G15	2	4974D22G02	1	1229C83G05	6	676B732G04
RGFN325N③	2	1229C81G15	2	4974D22G02	1	1229C83G05	6	676B732G04
GFN325	3	1229C81G15	3	4974D22G02	1	1229C83G06	6	676B732G04
RGFN325	3	1229C81G15	3	4974D22G02	1	1229C83G06	6	676B732G04
GFN425N②	3	1229C81G15	3	4974D22G02	1	1229C83G06	6	676B732G04
RGFN425N③	3	1229C81G15	3	4974D22G02	1	1229C83G06	6	676B732G04
GUN325	3	1229C81G16	3	4974D22G02			6	676B732G04
RGUN325	3	1229C81G16	3	4974D22G02			6	676B732G04
600A 240V								
GFN326N④	2	1229C82G15	2	4974D22G02	1	1229C83G07	6	676B731G03
RGFN326N⑤	2	1229C82G15	2	4974D22G02	1	1229C83G07	6	676B731G03
GFN326	3	1229C82G15	3	4974D22G02	1	1229C83G08	6	676B731G03
RGFN326	3	1229C82G15	3	4974D22G02	1	1229C83G08	6	676B731G03
GFN426N④	3	1229C82G15	3	4974D22G02	1	1229C83G08	6	676B731G03
RGFN426N⑤	3	1229C82G15	3	4974D22G02	1	1229C83G08	6	676B731G03
GUN326	3	1229C82G16	3	4974D22G02			6	676B731G03
RGUN326	3	1229C82G16	3	4974D22G02			6	676B731G03

†For a complete description of catalog numbers see Safety Switch Catalog 30-150, Price List 30-125.

● Each style number represents one terminal. Standard package quantity is (6) terminals.

② For Neutral order – 176C300G08 for NEMA 1 & NEMA 3R (After 1987)

③ For Neutral order – 176C300G09 for NEMA 3R (Prior to 1988)

④ For Neutral order – 176C300G10 for NEMA 1


⑤ For Neutral order – 176C300G10 for NEMA 3R

DANGER: Hazard of electrical shock or burn. Be sure to TURN OFF POWER supply before working on equipment.




Heavy Duty Safety Switches

Representative of Heavy Duty 30A thru 200A units. Note: upper base and separate lower fuse block styles cover units as shown, see pages 8-11.

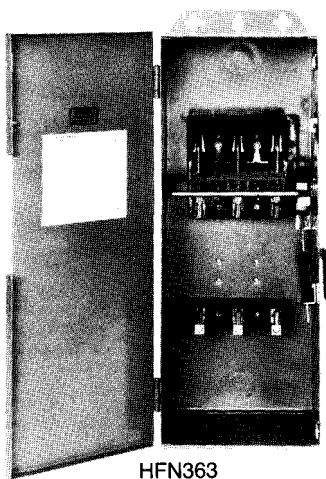


HFN363

Representative Heavy Duty De-Ion arc chutes, 30A thru 200A, 250 or 600V, one arc chute per switch - 600V units have arc grids, see pages 8-11.

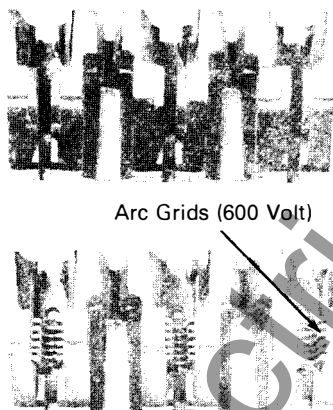


Arc Grids (600 Volt)


Representative photo of terminals for lower ratings 30A and 60A, see pages 8 and 9.



Representative of Heavy Duty non-fusible switch, base assembly style includes all components shown, see pages 8-11.

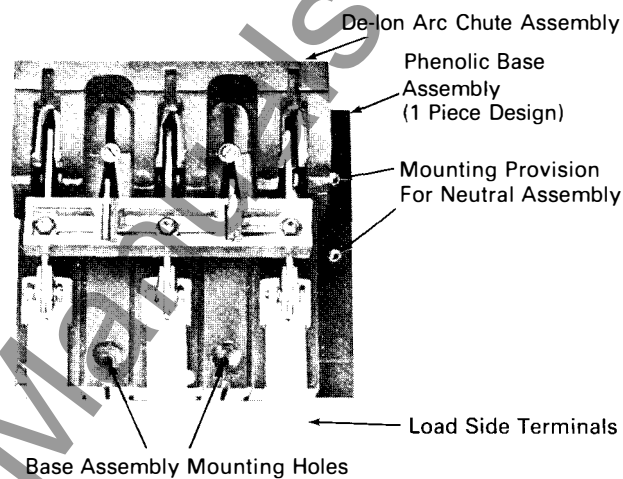


De-Ion arc chutes for Heavy Duty 400A & 600A switches, 250-600V. 600V have arc grids. Note: each pole requires its own arc chute, see pages 10 and 11.

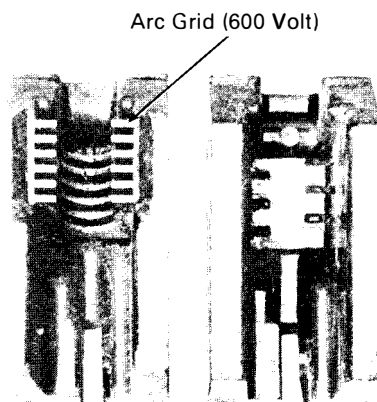

Arc Grid (600 Volt)

Representative photo of terminals 100A thru 600A, see pages 10 and 11.

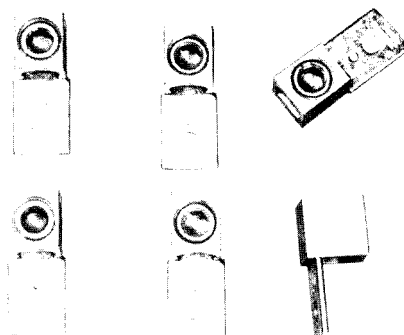

DANGER: Hazard of electrical shock or burn. Be sure to TURN OFF POWER supply before working on equipment.



Heavy Duty Safety Switches

Catalog Number	Qty. Req'd.	Base Assy. Style No.	Qty. Req'd.	Lower Fuse Block Style No.	Qty. Req'd.	Arc Chute Style No.	Qty. Req'd.	Terminals Style No.①
30A 250V								
HFN221	1	369D496G12			1	1289C20G01	6	750B437G06
JHFN221	1	369D496G12			1	1289C20G01	6	750B437G06
RHFN221	1	369D496G12			1	1289C20G01	6	750B437G06
WHFN221	1	369D496G12			1	1289C20G01	6	750B437G06
HFN321	1	369D496G15			1	1289C20G01	6	750B437G06
JHFN321	1	369D496G15			1	1289C20G01	6	750B437G06
RHFN321	1	369D496G15			1	1289C20G01	6	750B437G06
WHFN321	1	369D496G15			1	1289C20G01	6	750B437G06
JHUN221	1	369D496G11			1	1289C20G01	6	750B437G06
WHUN221	1	369D496G11			1	1289C20G01	6	750B437G06
HUN321	1	369D496G14			1	1289C20G01	6	750B437G06
JHUN321	1	369D496G14			1	1289C20G01	6	750B437G06
RHUN321	1	369D496G14			1	1289C20G01	6	750B437G06
WHUN321	1	369D496G14			1	1289C20G01	6	750B437G06
30A 600V								
HFN261	1	368D741G46	1	368D741G53	1	1220C94G02	6	750B437G05
JHFN261	1	368D741G46	1	368D741G53	1	1220C94G02	6	750B437G05
RHFN261	1	368D741G46	1	368D741G53	1	1220C94G02	6	750B437G05
WHFN261	1	368D741G46	1	368D741G53	1	1220C94G02	6	750B437G05
HFN361	1	368D741G48	1	368D741G54	1	1220C94G02	6	750B437G05
JHFN361	1	368D741G48	1	368D741G54	1	1220C94G02	6	750B437G05
RHFN361	1	368D741G48	1	368D741G54	1	1220C94G02	6	750B437G05
WHFN361	1	368D741G48	1	368D741G54	1	1220C94G02	6	750B437G05
HUN261	1	368D741G45	1		1	1220C94G02	6	750B437G05
JHUN261	1	368D741G45	1		1	1220C94G02	6	750B437G05
RHUN261	1	368D741G45	1		1	1220C94G02	6	750B437G05
WHUN261	1	368D741G45	1		1	1220C94G02	6	750B437G05
HUN361	1	368D741G47	1		1	1220C94G02	6	750B437G05
JHUN361	1	368D741G47	1		1	1220C94G02	6	750B437G05
RHUN361	1	368D741G47	1		1	1220C94G02	6	750B437G05
WHUN361	1	368D741G47	1		1	1220C94G02	6	750B437G05
60A 250V								
HFN222	1	368D741G35	1	368D741G49	1	1220C81G01	6	750B437G05
JHFN222	1	368D741G35	1	368D741G49	1	1220C81G01	6	750B437G05
RHFN222	1	368D741G35	1	368D741G49	1	1220C81G01	6	750B437G05
WHFN222	1	368D741G35	1	368D741G49	1	1220C81G01	6	750B437G05
HFN322	1	368D741G38	1	368D741G50	1	1220C81G01	6	750B437G05
JHFN322	1	368D741G38	1	368D741G50	1	1220C81G01	6	750B437G05
RHFN322	1	368D741G38	1	368D741G50	1	1220C81G01	6	750B437G05
WHFN322	1	368D741G38	1	368D741G50	1	1220C81G01	6	750B437G05
JHUN222	1	368D741G34	1		1	1220C81G01	6	750B437G05
WHUN222	1	368D741G34	1		1	1220C81G01	6	750B437G05
HUN322	1	368D741G37	1		1	1220C81G01	6	750B437G05
JHUN322	1	368D741G37	1		1	1220C81G01	6	750B437G05
RHUN322	1	368D741G37	1		1	1220C81G01	6	750B437G05
WHUN322	1	368D741G37	1		1	1220C81G01	6	750B437G05
60A 600V								
HFN262	1	368D741G41	1	368D741G51	1	1220C94G02	6	750B437G05
JHFN262	1	368D741G41	1	368D741G51	1	1220C94G02	6	750B437G05
RHFN262	1	368D741G41	1	368D741G51	1	1220C94G02	6	750B437G05
WHFN262	1	368D741G41	1	368D741G51	1	1220C94G02	6	750B437G05
HFN362	1	368D741G43	1	368D741G52	1	1220C94G02	6	750B437G05
JHFN362	1	368D741G43	1	368D741G52	1	1220C94G02	6	750B437G05
RHFN362	1	368D741G43	1	368D741G52	1	1220C94G02	6	750B437G05
WHFN362	1	368D741G43	1	368D741G52	1	1220C94G02	6	750B437G05
HUN262	1	368D741G40	1		1	1220C94G02	6	750B437G05
JHUN262	1	368D741G40	1		1	1220C94G02	6	750B437G05
RHUN262	1	368D741G40	1		1	1220C94G02	6	750B437G05
WHUN262	1	368D741G40	1		1	1220C94G02	6	750B437G05
HUN362	1	368D741G42	1		1	1220C94G02	6	750B437G05
JHUN362	1	368D741G42	1		1	1220C94G02	6	750B437G05
RHUN362	1	368D741G42	1		1	1220C94G02	6	750B437G05
WHUN362	1	368D741G42	1		1	1220C94G02	6	750B437G05

†For a complete description of catalog numbers see Safety Switch Catalog 30-150, Price List 30-125.

① Each style number represents one terminal. Standard package quantity is (6) terminals.

DANGER: Hazard of electrical shock or burn. Be sure to TURN OFF POWER supply before working on equipment.



Heavy Duty Safety Switches

Catalog Number	Qty. Req'd.	Base Assy. Style No.	Qty. Req'd.	Lower Fuse Block Style No.	Qty. Req'd.	Arc Chute Style No.	Qty. Req'd.	Terminals Style No. ①
100A 250V								
HFN223	1	369D679G23	1	369D679G32	1	369D659G02	6	135A705G01
JHFN223	1	369D679G23	1	369D679G32	1	369D659G02	6	135A705G01
RHFN223	1	369D679G23	1	369D679G32	1	369D659G02	6	135A705G01
WHFN223	1	369D679G23	1	369D679G32	1	369D659G02	6	135A705G01
HFN323	1	369D679G26	1	369D679G33	1	369D659G02	6	135A705G01
JHFN323	1	369D679G26	1	369D679G33	1	369D659G02	6	135A705G01
RHFN323	1	369D679G26	1	369D679G33	1	369D659G02	6	135A705G01
WHFN323	1	369D679G26	1	369D679G33	1	369D659G02	6	135A705G01
JHUN223	1	369D679G22	1	369D679G33	1	369D659G02	6	135A705G01
WHUN223	1	369D679G22	1	369D679G33	1	369D659G02	6	135A705G01
HUN323	1	369D679G25	1	369D679G33	1	369D659G02	6	135A705G01
JHUN323	1	369D679G25	1	369D679G33	1	369D659G02	6	135A705G01
RHUN323	1	369D679G25	1	369D679G33	1	369D659G02	6	135A705G01
WHUN323	1	369D679G25	1	369D679G33	1	369D659G02	6	135A705G01
100A 600V								
HFN263	1	369D679G29	1	369D679G32	1	369D659G03	6	135A705G01
JHFN263	1	369D679G29	1	369D679G32	1	369D659G03	6	135A705G01
RHFN263	1	369D679G29	1	369D679G32	1	369D659G03	6	135A705G01
WHFN263	1	369D679G29	1	369D679G32	1	369D659G03	6	135A705G01
HFN363	1	369D679G31	1	369D679G33	1	369D659G03	6	135A705G01
JHFN363	1	369D679G31	1	369D679G33	1	369D659G03	6	135A705G01
RHFN363	1	369D679G31	1	369D679G33	1	369D659G03	6	135A705G01
WHFN363	1	369D679G31	1	369D679G33	1	369D659G03	6	135A705G01
HUN263	1	369D679G28	1	369D679G33	1	369D659G03	6	135A705G01
JHUN263	1	369D679G28	1	369D679G33	1	369D659G03	6	135A705G01
RHUN263	1	369D679G28	1	369D679G33	1	369D659G03	6	135A705G01
WHUN263	1	369D679G28	1	369D679G33	1	369D659G03	6	135A705G01
HUN363	1	369D679G30	1	369D679G33	1	369D659G03	6	135A705G01
JHUN363	1	369D679G30	1	369D679G33	1	369D659G03	6	135A705G01
RHUN363	1	369D679G30	1	369D679G33	1	369D659G03	6	135A705G01
WHUN363	1	369D679G30	1	369D679G33	1	369D659G03	6	135A705G01
200A 250V								
HFN224	1	369D814G23	1	369D814G32	1	369D486G02	6	275A750G01
JHFN224	1	369D814G23	1	369D814G32	1	369D486G02	6	275A750G01
RHFN224	1	369D814G23	1	369D814G32	1	369D486G02	6	275A750G01
WHFN224	1	369D814G23	1	369D814G32	1	369D486G02	6	275A750G01
HFN324	1	369D814G26	1	369D814G33	1	369D486G02	6	275A750G01
JHFN324	1	369D814G26	1	369D814G33	1	369D486G02	6	275A750G01
RHFN324	1	369D814G26	1	369D814G33	1	369D486G02	6	275A750G01
WHFN324	1	369D814G26	1	369D814G33	1	369D486G02	6	275A750G01
JHUN224	1	369D814G22	1	369D814G33	1	369D486G02	6	275A750G01
WHUN224	1	369D814G22	1	369D814G33	1	369D486G02	6	275A750G01
HUN324	1	369D814G25	1	369D814G33	1	369D486G02	6	275A750G01
JHUN324	1	369D814G25	1	369D814G33	1	369D486G02	6	275A750G01
RHUN324	1	369D814G25	1	369D814G33	1	369D486G02	6	275A750G01
WHUN324	1	369D814G25	1	369D814G33	1	369D486G02	6	275A750G01
200A 600V								
HFN264	1	369D814G29	1	369D814G32	1	369D486G03	6	275A750G01
JHFN264	1	369D814G29	1	369D814G32	1	369D486G03	6	275A750G01
RHFN264	1	369D814G29	1	369D814G32	1	369D486G03	6	275A750G01
WHFN264	1	369D814G29	1	369D814G32	1	369D486G03	6	275A750G01
HFN364	1	369D814G31	1	369D814G33	1	369D486G03	6	275A750G01
JHFN364	1	369D814G31	1	369D814G33	1	369D486G03	6	275A750G01
RHFN364	1	369D814G31	1	369D814G33	1	369D486G03	6	275A750G01
WHFN364	1	369D814G31	1	369D814G33	1	369D486G03	6	275A750G01
HUN264	1	369D814G28	1	369D814G33	1	369D486G03	6	275A750G01
JHUN264	1	369D814G28	1	369D814G33	1	369D486G03	6	275A750G01
RHUN264	1	369D814G28	1	369D814G33	1	369D486G03	6	275A750G01
WHUN264	1	369D814G28	1	369D814G33	1	369D486G03	6	275A750G01
HUN364	1	369D814G30	1	369D814G33	1	369D486G03	6	275A750G01
JHUN364	1	369D814G30	1	369D814G33	1	369D486G03	6	275A750G01
RHUN364	1	369D814G30	1	369D814G33	1	369D486G03	6	275A750G01
WHUN364	1	369D814G30	1	369D814G33	1	369D486G03	6	275A750G01

†For a complete description of catalog numbers see Safety Switch Catalog 30-150, Price List 30-125.

① Each style number represents one terminal. Standard package quantity is (6) terminals.

DANGER: Hazard of electrical shock or burn. Be sure to TURN OFF POWER supply before working on equipment.



Heavy Duty Safety Switches

Catalog Number	Qty. Req'd.	Base Assy. Style No.	Qty. Req'd.	Lower Fuse Block Style No.	Qty. Req'd.	Arc Chute Style No.	Qty. Req'd.	Terminals Style No. ①
400A 250V								
HFN225	2	1229C81G13	1	1229C83G05	2	4974D22G02	6	676B732G04
JHFN225	2	1229C81G13	1	1229C83G05	2	4974D22G02	6	676B732G04
RHFN225	2	1229C81G13	1	1229C83G05	2	4974D22G02	6	676B732G04
WHFN225	2	1229C81G13	1	1229C83G05	2	4974D22G02	6	676B732G04
HFN325	3	1229C81G13	1	1229C83G06	3	4974D22G02	6	676B732G04
JHFN325	3	1229C81G13	1	1229C83G06	3	4974D22G02	6	676B732G04
RHFN325	3	1229C81G13	1	1229C83G06	3	4974D22G02	6	676B732G04
WHFN325	3	1229C81G13	1	1229C83G06	3	4974D22G02	6	676B732G04
JHUN225	2	1229C81G14			2	4974D22G02	6	676B732G04
WHUN225	2	1229C81G14			2	4974D22G02	6	676B732G04
HUN325	3	1229C81G14			3	4974D22G02	6	676B732G04
JHUN325	3	1229C81G14			3	4974D22G02	6	676B732G04
RHUN325	3	1229C81G14			3	4974D22G02	6	676B732G04
WHUN325	3	1229C81G14			3	4974D22G02	6	676B732G04
400A 600V								
HFN265	2	1229C81G11	1	1229C83G05	2	4974D22G03	6	676B732G04
JHFN265	2	1229C81G11	1	1229C83G05	2	4974D22G03	6	676B732G04
RHFN265	2	1229C81G11	1	1229C83G05	2	4974D22G03	6	676B732G04
WHFN265	2	1229C81G11	1	1229C83G05	2	4974D22G03	6	676B732G04
HFN365	3	1229C81G11	1	1229C83G06	3	4974D22G03	6	676B732G04
JHFN365	3	1229C81G11	1	1229C83G06	3	4974D22G03	6	676B732G04
RHFN365	3	1229C81G11	1	1229C83G06	3	4974D22G03	6	676B732G04
WHFN365	3	1229C81G11	1	1229C83G06	3	4974D22G03	6	676B732G04
HUN265	2	1229C81G12			2	4974D22G03	6	676B732G04
JHUN265	2	1229C81G12			2	4974D22G03	6	676B732G04
RHUN265	2	1229C81G12			2	4974D22G03	6	676B732G04
WHUN265	2	1229C81G12			2	4974D22G03	6	676B732G04
HUN365	3	1229C81G12			3	4974D22G03	6	676B732G04
JHUN365	3	1229C81G12			3	4974D22G03	6	676B732G04
RHUN365	3	1229C81G12			3	4974D22G03	6	676B732G04
WHUN365	3	1229C81G12			3	4974D22G03	6	676B732G04
600A 250V								
HFN226	2	1229C82G13	1	1229C83G07	2	4974D22G02	6	676B731G03
JHFN226	2	1229C82G13	1	1229C83G07	2	4974D22G02	6	676B731G03
RHFN226	2	1229C82G13	1	1229C83G07	2	4974D22G02	6	676B731G03
WHFN226	2	1229C82G13	1	1229C83G07	2	4974D22G02	6	676B731G03
HFN326	3	1229C82G13	1	1229C83G08	3	4974D22G02	6	676B731G03
JHFN326	3	1229C82G13	1	1229C83G08	3	4974D22G02	6	676B731G03
RHFN326	3	1229C82G13	1	1229C83G08	3	4974D22G02	6	676B731G03
WHFN326	3	1229C82G13	1	1229C83G08	3	4974D22G02	6	676B731G03
JHUN226	2	1229C82G14			2	4974D22G02	6	676B731G03
WHUN226	2	1229C82G14			2	4974D22G02	6	676B731G03
HUN326	3	1229C82G14			3	4974D22G02	6	676B731G03
JHUN326	3	1229C82G14			3	4974D22G02	6	676B731G03
RHUN326	3	1229C82G14			3	4974D22G02	6	676B731G03
WHUN326	3	1229C82G14			3	4974D22G02	6	676B731G03
600A 600V								
HFN266	2	1229C82G11	1	1229C83G07	2	4974D22G03	6	676B731G03
JHFN266	2	1229C82G11	1	1229C83G07	2	4974D22G03	6	676B731G03
RHFN266	2	1229C82G11	1	1229C83G07	2	4974D22G03	6	676B731G03
WHFN266	2	1229C82G11	1	1229C83G07	2	4974D22G03	6	676B731G03
HFN366	3	1229C82G11	1	1229C83G08	3	4974D22G03	6	676B731G03
JHFN366	3	1229C82G11	1	1229C83G08	3	4974D22G03	6	676B731G03
RHFN366	3	1229C82G11	1	1229C83G08	3	4974D22G03	6	676B731G03
WHFN366	3	1229C82G11	1	1229C83G08	3	4974D22G03	6	676B731G03
HUN266	2	1229C82G12			2	4974D22G03	6	676B731G03
JHUN266	2	1229C82G12			2	4974D22G03	6	676B731G03
RHUN266	2	1229C82G12			2	4974D22G03	6	676B731G03
WHUN266	2	1229C82G12			2	4974D22G03	6	676B731G03
HUN366	3	1229C82G12			3	4974D22G03	6	676B731G03
JHUN366	3	1229C82G12			3	4974D22G03	6	676B731G03
RHUN366	3	1229C82G12			3	4974D22G03	6	676B731G03
WHUN366	3	1229C82G12			3	4974D22G03	6	676B731G03

†For a complete description of catalog numbers see Safety Switch Catalog 30-150, Price List 30-125.
① Each style number represents one terminal. Standard package quantity is (6) terminals.

DANGER: Hazard of electrical shock or burn. Be sure to TURN OFF POWER supply before working on equipment.



Heavy Duty Safety Switches

Catalog Number	Qty. Req'd.	Upper Base Assy. Style No.	Qty. Req'd.	Lower Fuse Block Style No.	Qty. Req'd.	Arc Chute Style No.	Qty. Req'd.	Terminals Style No.●
800A 250V								
HFN327, RHFN327	3	1229C84G07	1	1229C86G08	6	4974D22G02	6	752B680G02
HUN327, RHUN327	3	1229C84G08	1	1229C86G08	6	4974D22G02	6	752B680G02
800A 600V								
HFN367	3	1229C84G05	1	1229C86G08	6	4974D22G03	6	752B680G02
RHFN367	3	1229C84G05	1	1229C86G08	6	4974D22G03	6	752B680G02
HUN367	3	1229C84G06			6	4974D22G03	6	752B680G02
RHUN367	3	1229C84G06			6	4974D22G03	6	752B680G02
1200A 250V								
HFN328, RHFN328	3	1229C85G07	1	1229C86G10	6	4974D22G02	6	676B731G03
HUN328, RHUN328	3	1229C85G08	1	1229C86G10	6	4974D22G02	6	676B731G03
1200A 600V								
HFN368	3	1229C85G05	1	1229C86G10	6	4974D22G03	6	676B731G03
RHFN368	3	1229C85G05	1	1229C86G10	6	4974D22G03	6	676B731G03
JHUN368	3	1229C85G06			6	4974D22G03	6	676B731G03
RHUN368	3	1229C85G06			6	4974D22G03	6	676B731G03

Part No.	Description
Spring Kit	
481-050-01	30A GD Mechanism Spring and Lever Kit
481-050-02	60A GD Mechanism Spring and Lever Kit
481-050-03	100A GD Mechanism Spring and Lever Kit
481-050-04	200A GD Mechanism Spring and Lever Kit
481-050-05	30A HD Mechanism Spring and Lever Kit
481-050-06	30/60A HD Mechanism Spring and Lever Kit
481-050-07	100A HD Mechanism Spring and Lever Kit
481-050-08	200A HD Mechanism Spring and Lever Kit
Gasket Kit	
481-050-09	30/60A Gasketing (1 Roll)
481-050-10	100/200A Gasketing (1 Roll)
481-050-11	400/600A Gasketing (1 Roll)
481-050-12	800/1200A Gasketing (1 Roll)
Latch Kit	
481-050-13	30/60A Suitcase Latch
481-050-14	100/200A Suitcase Latch
481-050-15	400/600A Suitcase Latch

For Further Information

Catalog 25-000

Price List 30-125

Catalog 30-150

Mini Residential Contractors SA-11668A

SA-11767 Safety Switches

†For a complete description of catalog numbers see Safety Switch Catalog 30-150, Price List 30-125.

① Each style number represents one terminal. Standard package quantity is (6) terminals.

DANGER: Hazard of electrical shock or burn. Be sure to TURN OFF POWER supply before working on equipment.



Distributed by:

Westinghouse Electric Corporation
Distribution and Control Business Unit
Standard Distribution Products Division
Pittsburgh, Pennsylvania, U.S.A. 15220