


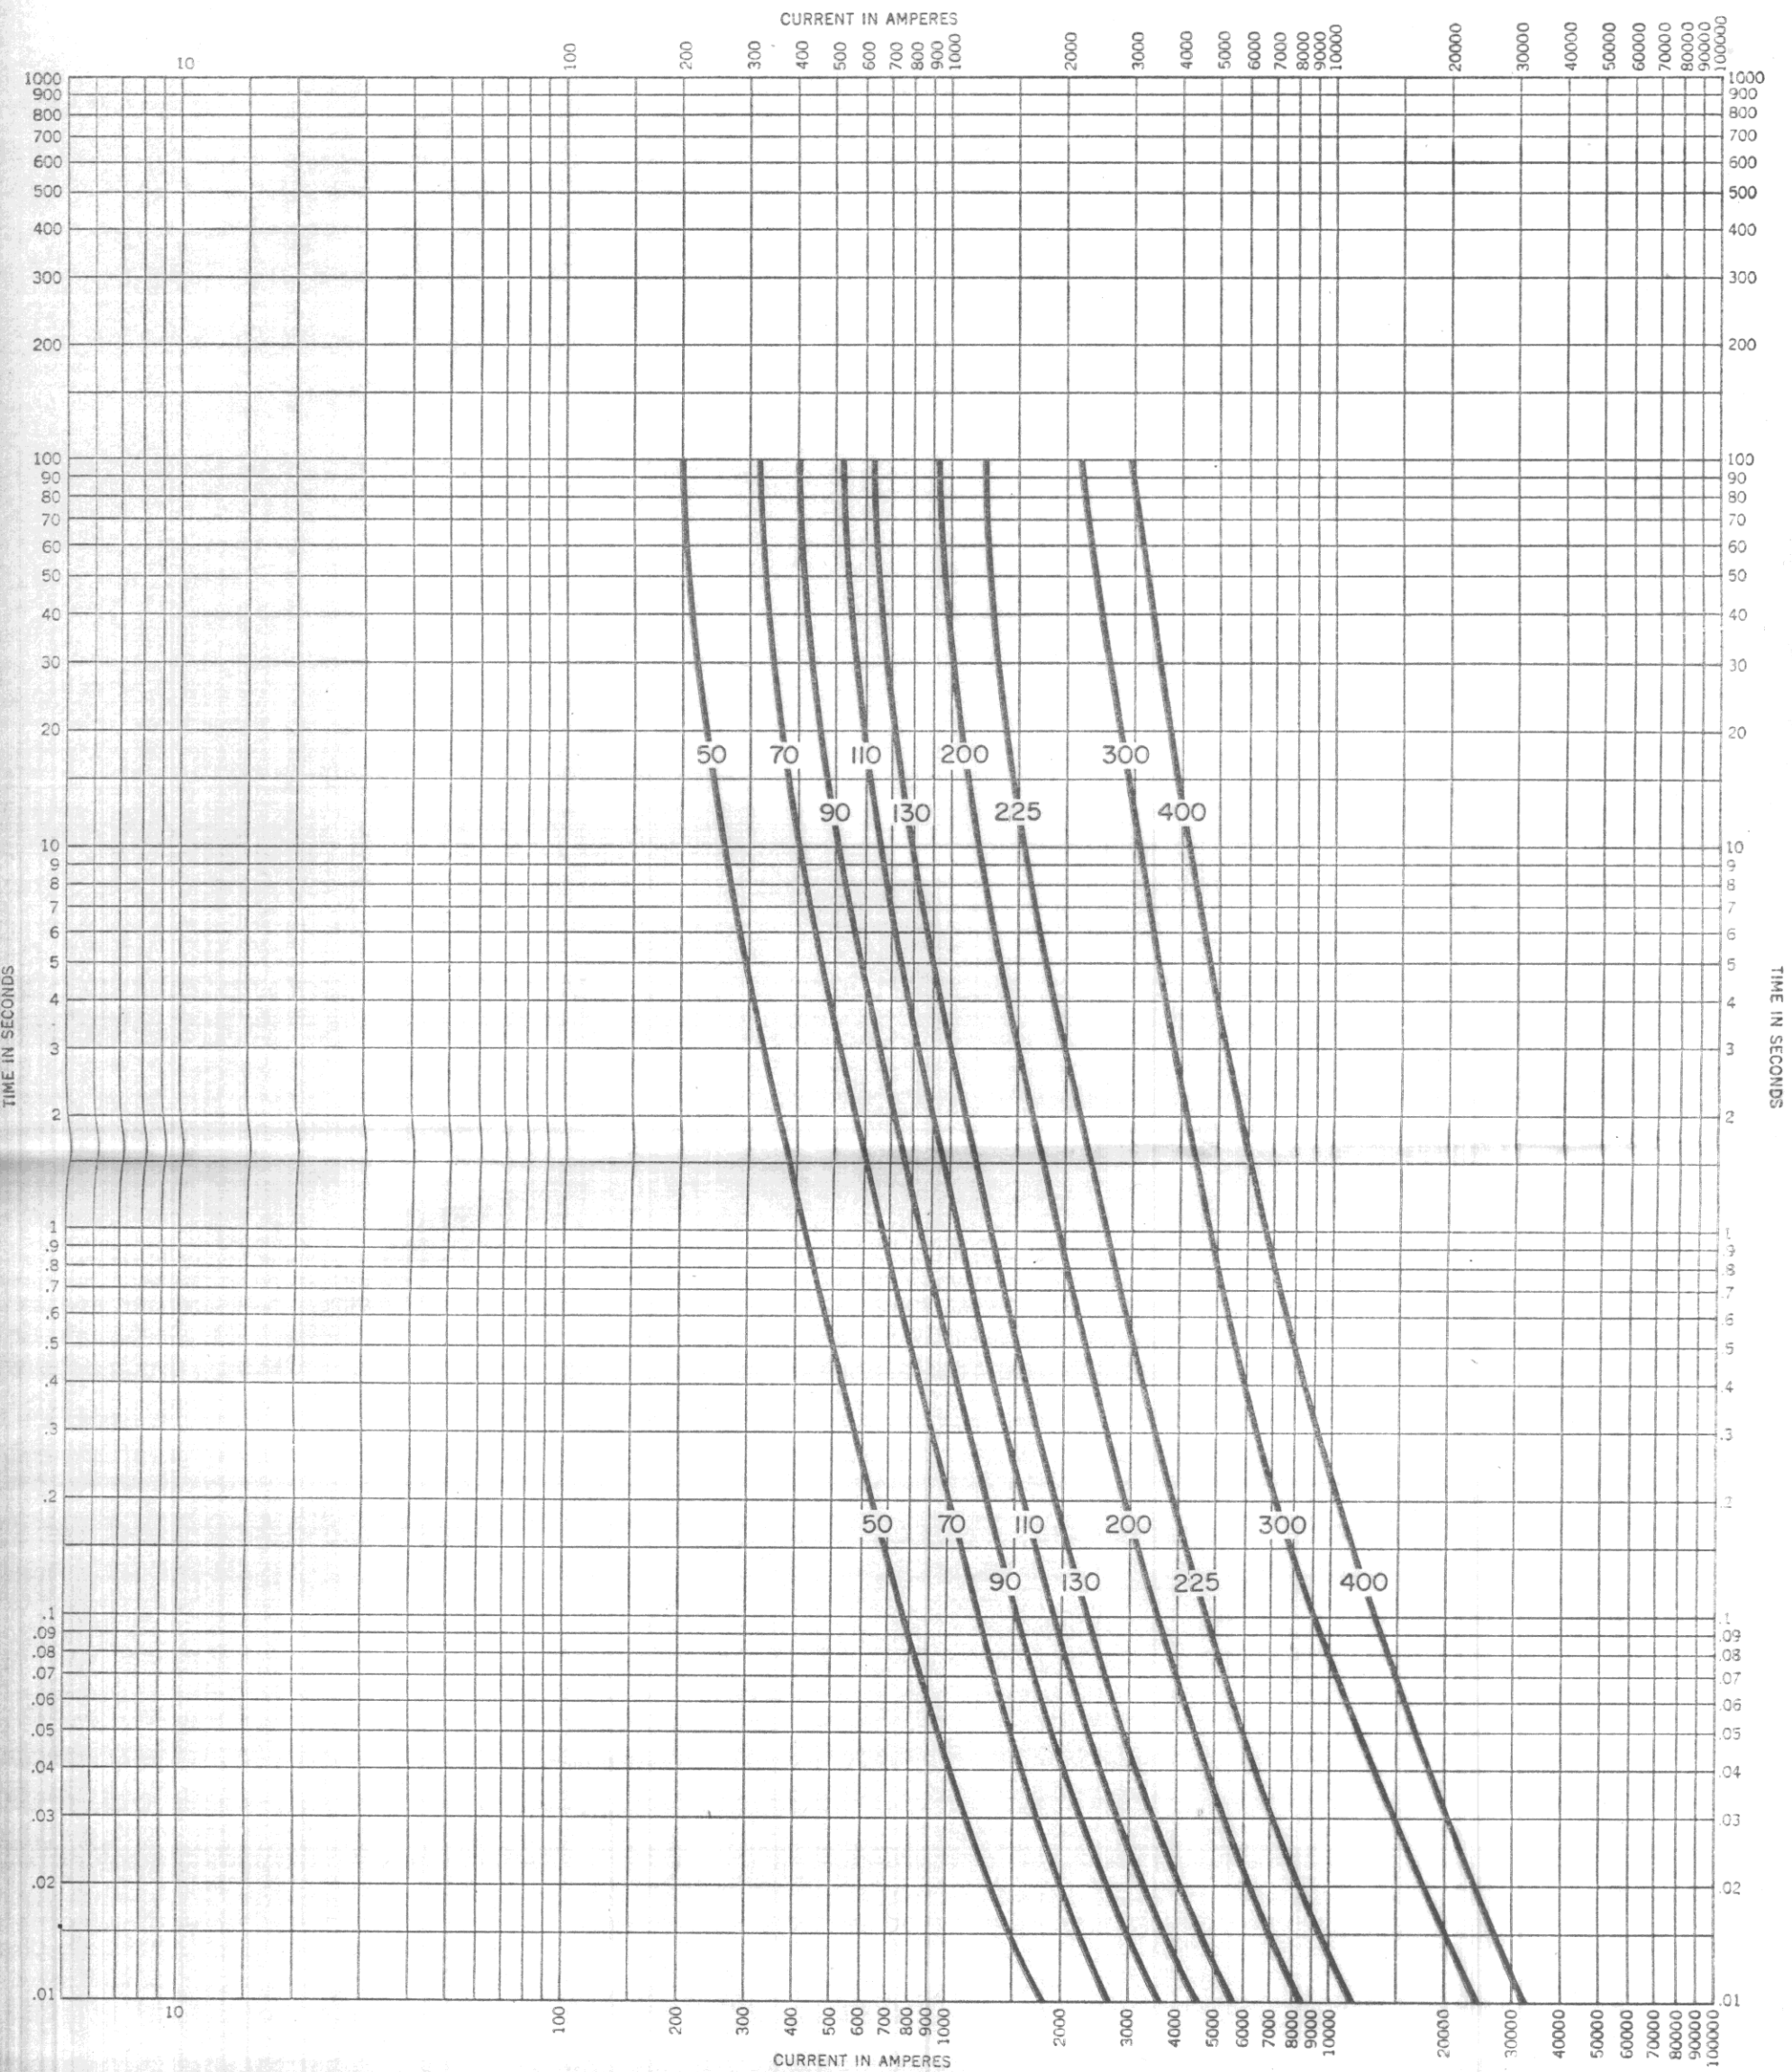

type CLS-1 and BAL-LR • current limiting fuses
total clearing time-current characteristics—2.0 to 5.5 kv

Curves are based on tests starting with fuse units at an ambient temperature of 25°C and without initial load. Curves are plotted to maximum test points.

Westinghouse Electric Corporation
Assembled Switchgear and Devices Dept.: East Pittsburgh Division • East Pittsburgh, Pa.
printed in U.S.A.

curve no. **21**
reference no. 512854
January, 1961