

INSTRUCTIONS

*Switchgear*

Type HGA33A

**TIME DELAY CONTROL RELAY**

GENERAL  ELECTRIC

# TIME DELAY CONTROL RELAY

## TYPE HGA33A

### INTRODUCTION

Type HGA33A relay is a time delay, hinged armature type relay having single pole, single throw, double break contacts. It is designed for use as a control relay in a motor elevating circuit with motor P-6517087.

### RATINGS

This relay is available with intermittent coil ratings of 5 minutes at 125 and 250 volts d-c. It can also be supplied with an external rectifier and a capacitor for intermittent use on 230 volts, 25/60

cycles a-c.

The contacts will make, carry for 5 minutes, and interrupt the stalled rotor current of motor P-6517087 at its rated voltage.

### BURDENS

The d-c rated relays have a burden of approximately 45 watts. The a-c rated relays have a burden of approximately 63 volt-amperes and 27 watts including the external rectifier and capacitor.

### RECEIVING, HANDLING AND STORAGE

These relays, when not included as a part of a control panel will be shipped in cartons designed to protect them against damage. Immediately upon receipt of a relay, examine it for any damage sustained in transit. If injury or damage resulting from rough handling is evident, file a damage claim at once with the transportation company and promptly notify the nearest General Electric Apparatus Sales Office.

Reasonable care should be exercised in unpack-

ing the relay in order that none of the parts are injured or the adjustments disturbed.

If the relays are not to be installed immediately, they should be stored in their original cartons in a place that is free from moisture, dust and metallic chips. Foreign matter collected on the outside of the case may find its way inside when the cover is removed and cause trouble in the operation of the relay.

### DESCRIPTION

The contact circuit of this control relay is closed or opened by moving contact arms controlled by a hinge-type armature, which in turn is actuated by the operating coil and restrained by an adjustable control spring.

The armature, magnet and contact assemblies are all mounted on a compact moulded compound base. The relay is front connected and is provided with a moulded compound cover. The base is suit-

ably notched to provide for the entrance of the connecting leads.

On d-c relays, small horseshoe permanent magnets are mounted in grooves in the base and are held in place by the stationary contact brackets. The contact buttons are elkonite.

The coil is wound on a copper spool which also acts as a damping ring and provides time delay on dropout when the coil is de-energized.

*These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the General Electric Company.*

## INSTALLATION

### LOCATION

The location should be cleaned and dry, free from dust and excessive vibration, and well lighted to facilitate inspection and testing.

### MOUNTING

The relay should be mounted on a vertical surface. The outline and panel drilling dimensions of the relay are given in Fig. 1. The outline of the external rectifier and capacitor for the a-c rated relay are given in Fig. 2.

### CONNECTIONS

The internal connection diagram for this relay is shown in Fig. 1. Note that terminal one of the relay must be connected to the positive side of the control power supply in order to obtain the correct

magnetic blowout effect.

### ADJUSTMENTS

The relays have been adjusted at the factory to operate at 60 percent of rating (cold) for d-c relays or 80 percent of rating for a-c relays. This adjustment can be restored, if necessary, by shifting the control spring to a different notch in the armature tail piece. A coarser adjustment may be obtained by shifting the control spring to a different hold in the anchor pin.

As shipped from the factory, the relay has a time delay dropout of approximately 0.24 seconds. This time delay feature results from the dampening effect of the copper spool. It may be adjusted over a small range by regulating the control spring tension. This adjustment, of course, affects the pickup adjustment.

## MAINTENANCE

### PERIODIC TESTING

Auxiliary relay equipment should be checked for operation at regular intervals, preferably at the same time the associated devices are inspected.

### CONTACT CLEANING

For cleaning fine silver contacts, a flexible burnishing tool should be used. This consists of a flexible strip of metal with an etched roughened surface, resembling in effect a superfine file. The polishing action is so delicate that no scratches are left, yet corroded material will be removed rapidly and thoroughly. The flexibility of the tool

insures the cleaning of the actual points of contact. Sometimes an ordinary file cannot reach the actual points of contact because of some obstruction from some other part of the relay.

Fine silver contacts should not be cleaned with knives, files, or abrasive paper or cloth. Knives or files may leave scratches which increase arcing and deterioration of the contacts. Abrasive paper or cloth may leave minute particles of insulating abrasive material in the contacts and thus prevent closing.

The burnishing tool described above can be obtained from the factory.

## RENEWAL PARTS

It is recommended that sufficient quantities of renewal parts be carried in stock to enable the prompt replacement of any that are worn, broken, or damaged.

When ordering renewal parts, address the near-

est Sales Office of the General Electric Company, specify quantity required, name of part wanted, and give complete nameplate data, including serial number. If possible, give the General Electric Company requisition number on which the relay was furnished.

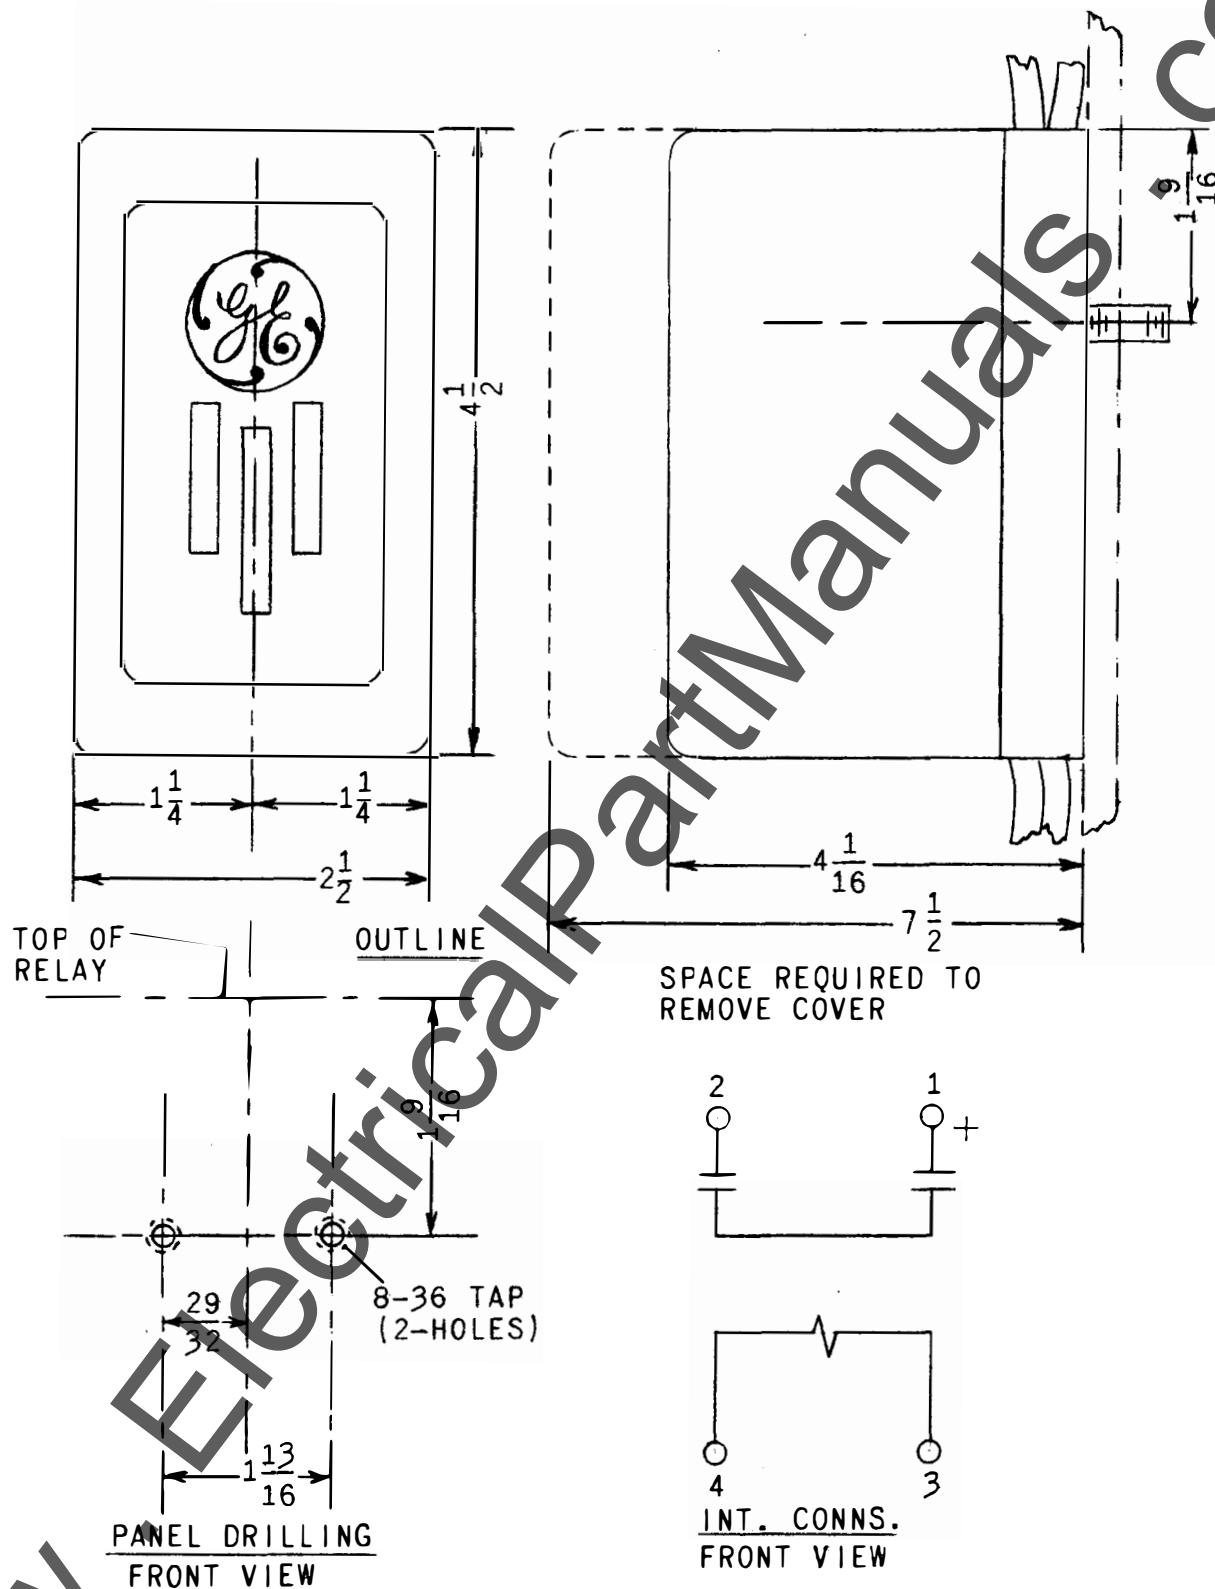


Fig. I Outline, Panel Drilling And Internal Connection Dimensions For Type HGA33A Relay

Time Delay Control Relay Type HGA33A

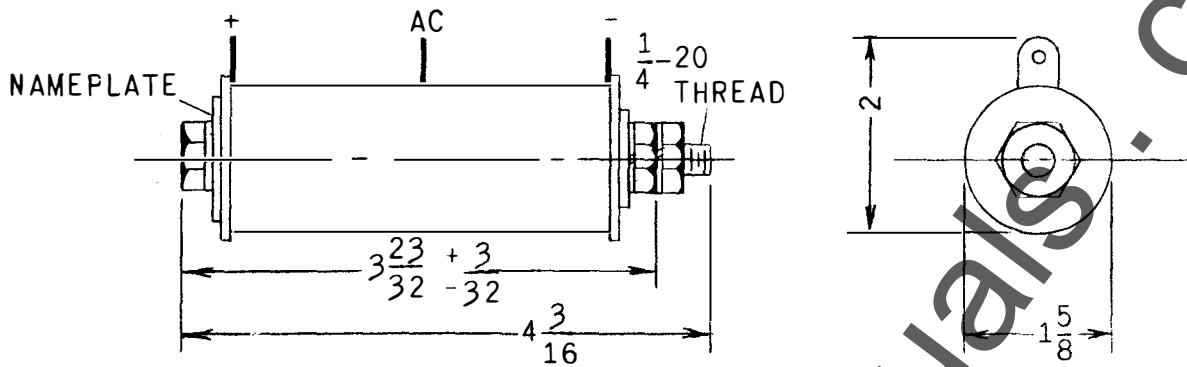


FIG-1 (OUTLINE FOR 6RS116A1VVV)


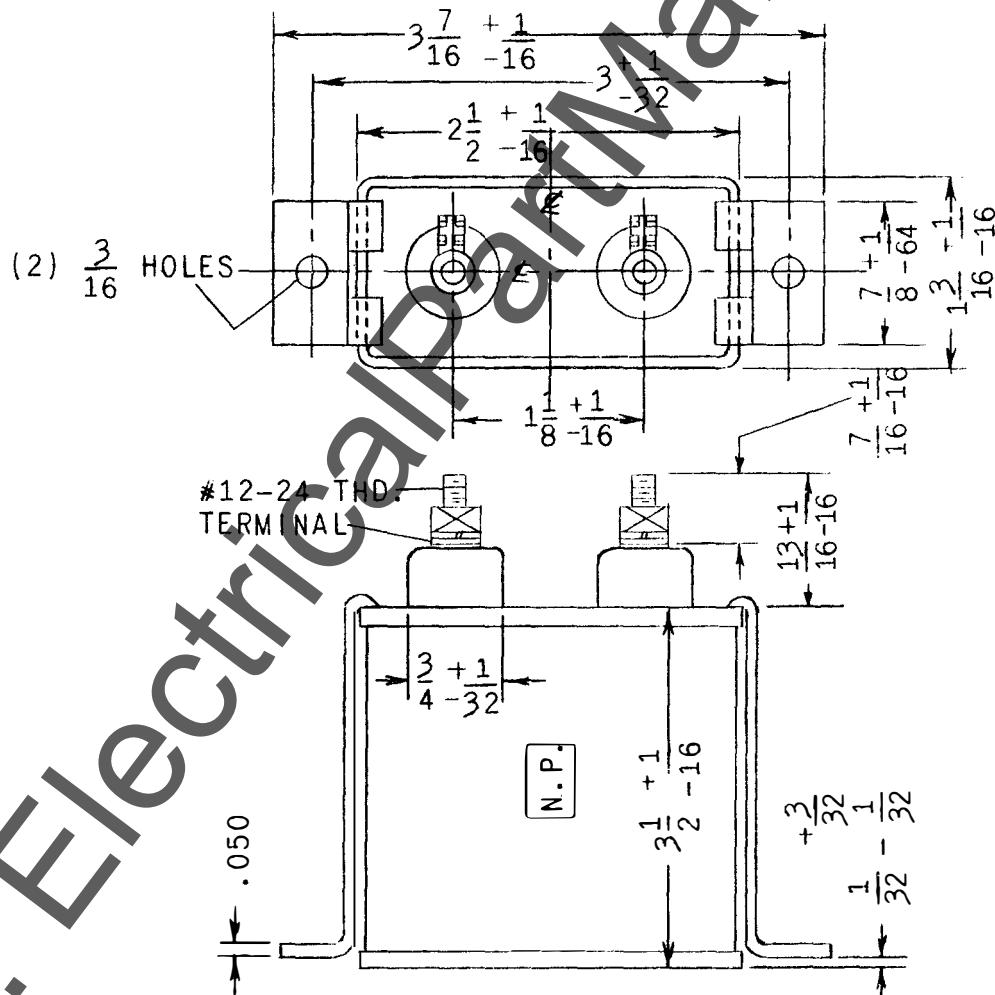


FIG-2 (OUTLINE FOR 21F910)

Fig. 2 Outline Of External Rectifier And Capacitor For Type HGA33A Relay

Time Delay Control Relay Type HGA33A

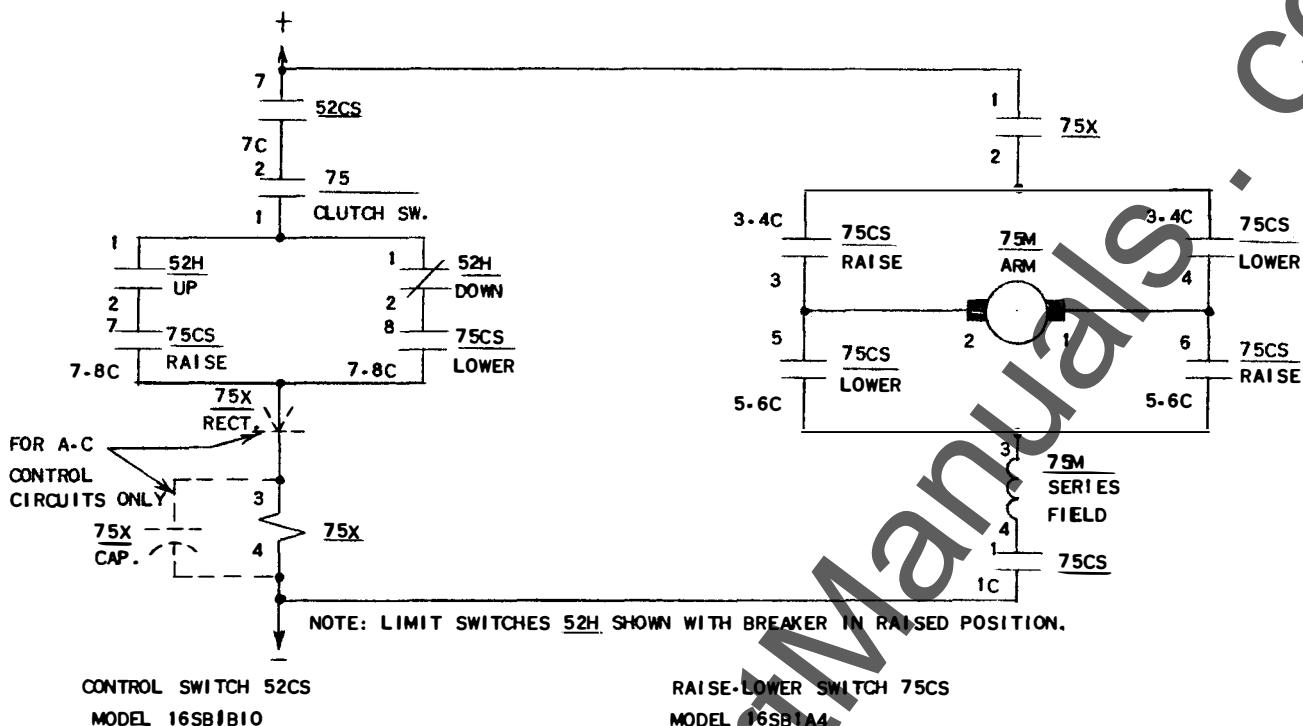

CONTACT	HANDLE END	POSITIONS			
		NO.	CLOSE	NORM. AFTER CLOSE	NORM. AFTER TRIP
1 1-2C	1				X
	2				X
3 3C 4C	3			X	X
	4	X			
5 5C 6C	5	X		X	
	6	X		X	
7 7C 8C	7			X	X
	8			X	X

SPRING RETURN TO NORMAL

X DENOTES CONTACT CLOSED

CONTACT	HANDLE END	POSITIONS		
		NO.	LOWER	NORM.
1 1C 2C	1	X		X
	2		X	
3 3-4C	3			X
	4	X		
5 5-6C	5	X		
	6			X
7 7-8C	7			X
	8	X		

X DENOTES CONTACT CLOSED.

LEGEND		
SYMBOL	DEVICE	DESCRIPTION
52CS	16SB1B10	CIRCUIT BREAKER CONTROL SWITCH
52H		MOTOR LIMIT SWITCH
75CS	16SB1A4	RAISE-LOWER SWITCH
75M	P-6517087	ELEVATING MOTOR
75X	HGA33A	CONTROL RELAY

Fig. 3 (389A708)

Fig. 3 Typical External Connections For Type HGA33A Relay When Used In Elevating Mechanism Circuit

**WHEN YOU NEED SERVICE**

GFZ.85E

**IF YOU NEED TO REPAIR**, recondition, or rebuild any electric apparatus, a G-E service shop near you is available day and night, seven days a week, for work in the shops or on your premises. Latest factory methods and genuine G-E renewal parts are used to maintain the original performance of your G-E equipment. For full information about these services, contact the nearest service shop or sales office listed below:

## APPARATUS SERVICE SHOPS

Atlanta—Chamblee, Ga.	4639 Peachtree Indus. Blvd.
Baltimore 30, Md.	920 E. Fort Ave.
Boston—Medford 55, Mass.	Mystic Valley Pkwy.
Buffalo 11, N. Y.	318 Urban St.
Charleston 28, W. Va.	306 MacCarkle Ave., S.E.
Charlotte, N. C.	2328 Thrift Road
Chicago 80, Ill.	849 S. Clinton St.
Cincinnati 2, Ohio	444 W. Third St.
Cleveland 4, Ohio	4966 Woodland Ave.
Columbus 15, Ohio	213 Cozzens St.
Dallas 9, Texas	3202 Manor Way
Denver 5, Colo.	3353 Larimer St.
Detroit 2, Mich.	5950 Third Ave.
Houston 20, Texas	5534 Harvey Wilson Drive
Johnstown, Pa.	841 Oak St.
Kansas City 8, Mo.	819 E. 19th St.
Los Angeles 1, Calif.	6900 Stanford Ave.
Milwaukee 3, Wisc.	940 W. St. Paul Ave.
Minneapolis 12, Minn.	2025 49th Ave., N.
New York 14, N. Y.	416 W. 13th St.
Philadelphia 23, Pa.	429 N. Seventh St.
Pittsburgh 6, Pa.	6519 Penn Ave.
Portland 18, Oregon	2727 N.W. 29th Ave.
Richmond 24, Va.	1403 Ingram Ave.
St. Louis 10, Mo.	1115 East Road
San Francisco 3, Calif.	1098 Harrison St.



For service outside the United States, Canada, and Hawaii, consult the nearest office of the International General Electric Company.

Salt Lake City 4, Utah. 301 S. Seventh West St.  
Seattle 4, Wash. .... 3422 First Ave., S.  
San Jose 2, Calif. .... 155 S. San

Toledo 4, Ohio.....1 So. St. Clair St.  
York, Pa.....54 N. Harrison St.  
Youngstown 5, Ohio.....272 E. Indianola Ave.

#### **APPARATUS SALES OFFICES**

Fort Wayne 2, Ind.	127 W. Berry St.	Philadelphia 2, Pa.	1405 Locust St.
Fort Worth 2, Texas	408 W. Seventh St.	Phoenix, Ariz. P.O. Box 4037, 303 Luhrs Tower	
Fresno 1, Calif.	407 Patterson Bldg.	Pittsburgh 22, Pa.	535 Smithfield St.
	Tulare and Fulton St.	Portland 3, Maine	.477 Congress St.
Grand Rapids 2, Mich.	148 Monroe Ave., N.W.	Portland 7, Ore.	.92C S.W. Sixth Ave.
Greensboro, N. C.	301 S. Elm St.	Portsmouth, Ohio . P.O. Box 37, 721 Sixth St.	
Greenville, S. C.	108 W. Washington St.	Providence 3, R. I.	.Industrial Trust Bldg.
Hagerstown, Md.	Professional Arts Bldg.	Raleigh, N. C.	336 Fayetteville St.
Harrisburg, Pa.	300 N. Second St.	Reading, Pa.	.31 N. Sixth St.
Hartford 3, Conn.	410 Asylum St.	Richmond 17, Va.	.700 E. Franklin St.
Houston 1, Texas	1312 Live Oak St.	Riverside, Calif.	.3808 Main St.
Huntsville, Ala.	1107 Times Bldg.	Roanoke 16, Va.	.920-924 S. Jefferson St.
Indianapolis 4, Ind.	110 N. Illinois St.	Rochester 4, N. Y.	.89 E. Ave.
Jackson, Mich.	120 W. Michigan Ave.	Rockford, Ill.	.110 S. First St.
Jackson 1, Miss.	203 W. Capitol St.	Rutland, Vt.	.38½ Center St.
Jacksonville 2, Fla.	700 E. Union St.	Sacramento 14, Calif.	.626 Forum Bldg.
Jamestown, N. Y. P.O. Box 548, 2 Second St.		Saginaw, Mich.	.501 Bearinger Bldg.
Johnson City, Tenn.	321-323 W. Walnut St.	St. Louis 2, Mo.	.112 N. Fourth St.
Johnstown, Pa.	841 Oak St.	Salt Lake City 9, Utah	.200 S. Main St.
Joplin, Mo. P.O. Box 931, 220½ W. Fourth St.		San Antonio 5, Texas	.310 S. St. Mary's St.
Kansas City 6, Mo.	106 W. Fourteenth St.	San Diego 1, Calif.	.1240 Seventh Ave.
Knoxville 08, Tenn.	602 S. Gay St.	San Francisco 6, Calif.	.235 Montgomery St.
Lansing 8, Mich.	106 W. Allegan St.	San Jose 10, Calif.	.460 Park Ave.
Lexington, Ky.	First National Bank Bldg.	Savannah, Ga.	.4 E. Bryan St.
Lincoln 8, Nebr.	1001 "O" St.	Seattle 4, Wash.	.710 Second Ave.
Little Rock, Ark.	103 W. Capitol Ave.	Shreveport, La.	.910 Shelby Bldg.
Los Angeles 54, Calif.	212 N. Vignes St.	Sioux City 13, Iowa. 572 Orpheum Electric Bldg.	
Louisville 2, Ky.	455 S. Fourth St.	Sioux Falls, S. D.	.306 South Phillips Ave.
Macon, Ga.	682 Cherry St.	South Bend 1, Ind.	.112 W. Jefferson Blvd.
Madison 3, Wisc.	16 N. Carroll St.	Spokane 8, Wash.	.S. 162 Post St.
Manchester, N. H.	875 Elm St.	Springfield, Ill.	.607 E. Adams St.
Medford, Ore. P.O. Box 1349, 205 W. Main St.		Springfield 3, Mass.	.1387 Main St.
Memphis 3, Tenn.	8 N. Third St.	Stockton, Calif.	.11 Sa. Son Joaquin St.
Miami 32, Fla.	25 S.E. Second Ave.	Syracuse 2, N. Y.	.113 S. Salina St.
Milwaukee 3, Wisc.	940 W. St. Paul Ave.	Tacoma 1, Wash.	.1202 Washington Bldg.
Minneapolis 3, Minn.	12 S. Sixth St.	Tampa 6, Fla.	.1206 North A St.
Mobile 13, Ala.	54 St. Joseph St.	Toledo 4, Ohio.	.420 Madison Ave.
Montgomery 4, Alo.	205 Montgomery St.	Trenton 8, N. J.	.214 E. Hanover St.
Nashville 3, Tenn.	234 Third Ave., N.	Tulsa 3, Okla.	.320 S. Boston Ave.
Newark 2, N. J.	744 Broad St.	Tucson, Ariz. P.O. Box 710, 650 N. Sixth Ave.	
New Haven 6, Conn.	129 Church St.	Utica 2, N. Y.	.258 Genesee St.
New Orleans 12, La.	837 Gravier St.	Washington 5, D.C.	.777-14th St., N.W.
New York 22, N. Y.	570 Lexington Ave.	Waterbury 89, Conn.	.111 W. Main St.
Niagara Falls, N. Y.	253 Second St.	Waterloo, Iowa	.206 W. 4th St.
Norfolk 10, Va.	229 W. Bute St.	Wenatchee, Wash.	.328 N. Wenatchee Ave.
Oakland 12, Calif.	409 Thirteenth St.	Wheeling, W. Va.	.40 Fourteenth St.
Oklahoma City 2, Okla.	119 N. Robinson St.	Wichita 2, Kan.	.200 E. First St.
Omaha 2, Neb.	409 S. Seventeenth St.	Williamston, N. C.	.115 E. Main St.
Paducah, Ky. P.O. Box 1001, 231 S. Fourth St.		Wilmington 98, Del.	.1326 N. Market St.
Pasco, Wash.	421 W. Clark St.	Worcester 8, Mass.	.507 Main St.
Pearia 2, Ill.	309 Jefferson Bldg.	York, Pa.	.56 N. Harrison St.
Youngstown 5, Ohio		Youngstown 5, Ohio	.272 E. Indiana Ave.

Hawaii: American Factors Ltd P.O. Box 3230, Honolulu, HI

**Canada: Canadian General Electric Company Ltd., Toronto**

# GENERAL ELECTRIC