


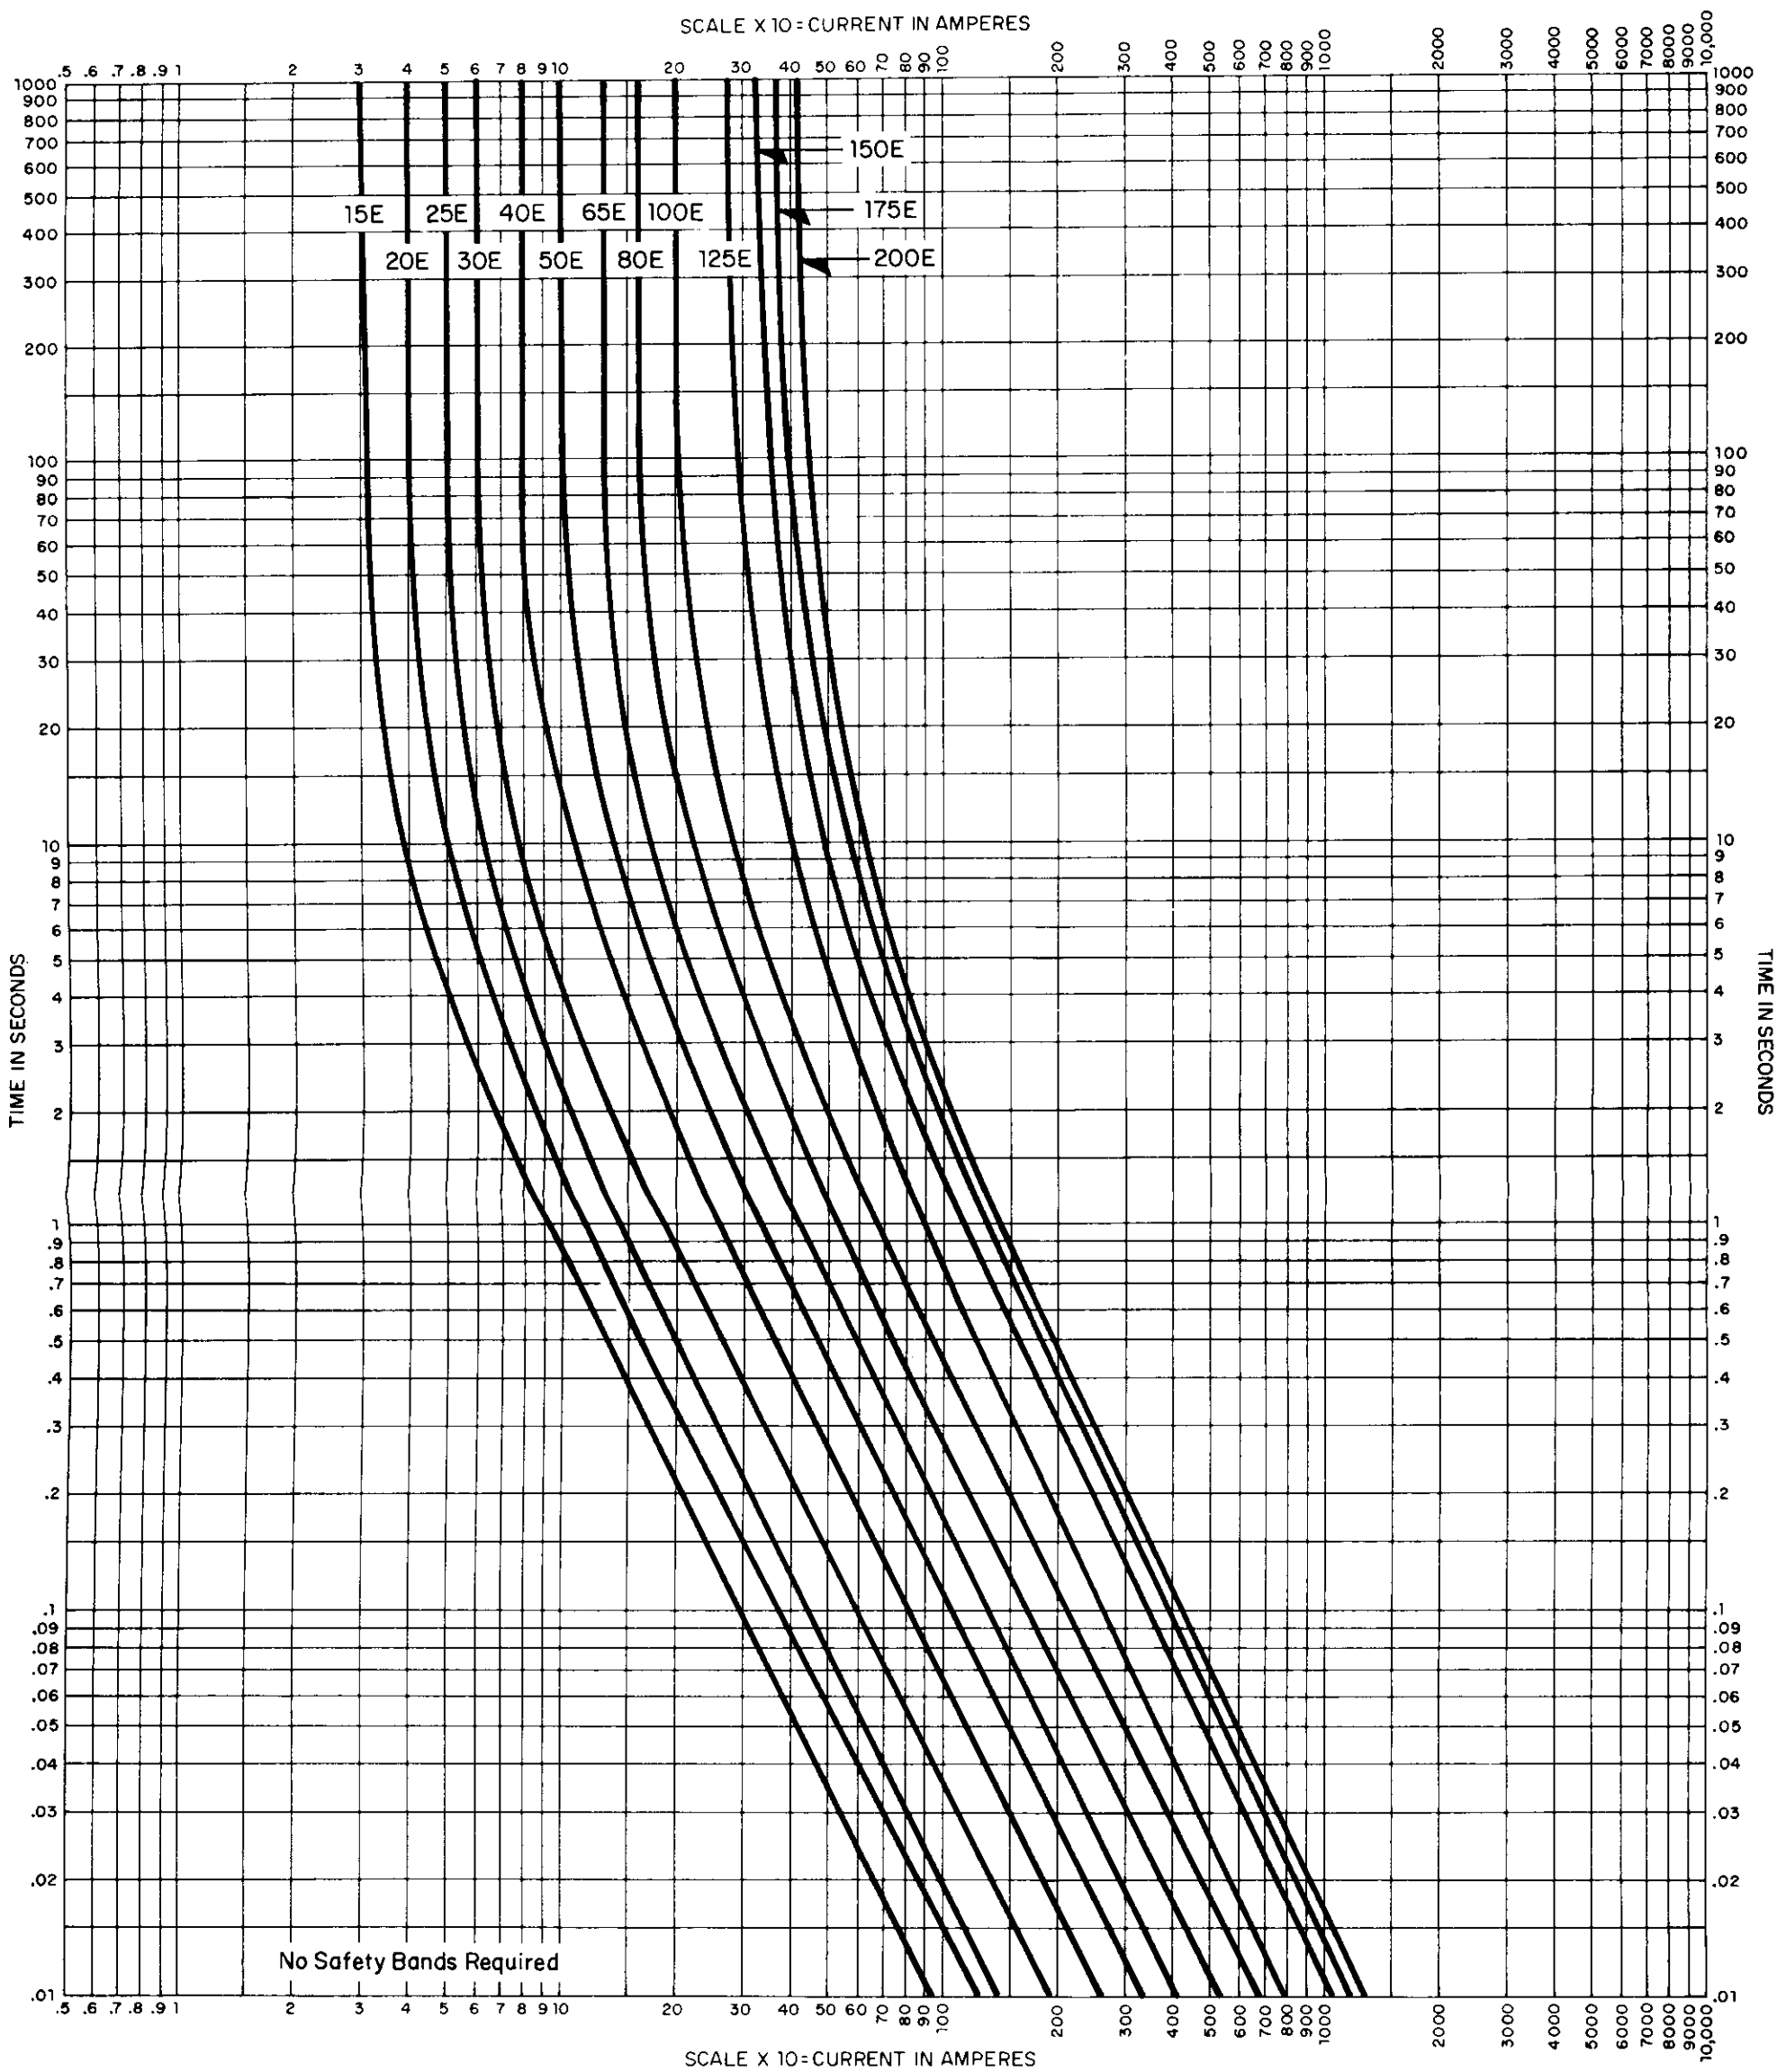

Type DBU® Fuses • Slow "E" Rated Fuse Units

Minimum Melting Time-Current Characteristics, 8.3 to 38.0 Kv

Curves are based on tests starting with fuse unit at an ambient temperature of 25°C and without initial load. Curves are plotted to minimum test points so all variations should be positive.

Westinghouse Electric Corporation
Distribution and Control Business Unit
Pittsburgh, PA 15220
Printed in USA
Ⓢ Changed since previous issue.

Curve No.

1

Supersedes Curve No. 1 Dated April, 1980

Reference No. 666755

May, 1988