



Power Circuit Breakers

Neutral Sensor Disconnect Kit for Substructure Cat. No. TAK1SR01, TAK1SR02, TAK1SR01F, TAK1SR02F

CAUTION: To avoid electrical hazard, make sure primary and secondary circuits are not energized while working in the compartment.

KIT CONTENTS (CAT. NO. 343L877G1)

The kit shown in Figure 1 contains the disconnect assembly, mounting hardware, wire ties and a grommet strip. This unit mates with breaker mounted contact block.

INSTRUCTIONS

Attach the unit to the right racking stud support as shown in Figure 2. Install one screw through round hole first for accurate positioning. Attach wires with crimp terminals for #6 screws to wiring studs. Use wire ties to anchor wires and the grommet strip to line one 1¼" diameter wiring access hole.

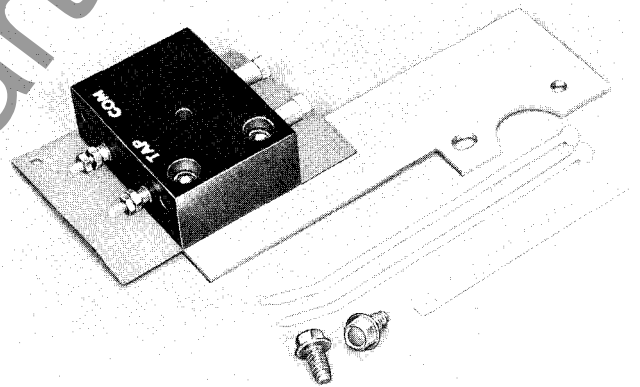


Figure 1.

See back . . .

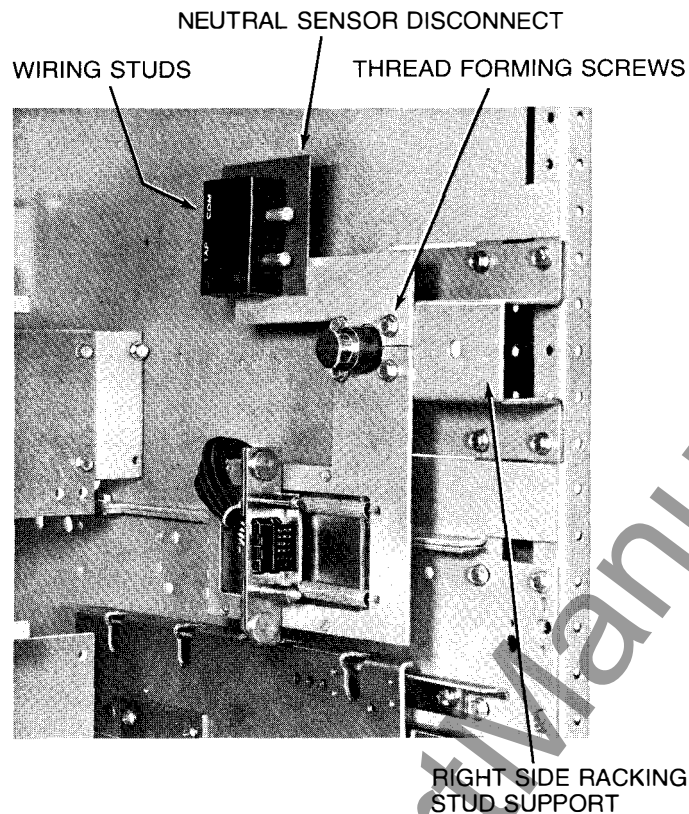


Figure 2.

© 1985 GENERAL ELECTRIC COMPANY

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the General Electric Company

For further information
call or write your local
General Electric
Sales Office or . . .

General Electric
Company
41 Woodford Avenue
Plainville, CT 06062 U.S.A.

Outside the U.S. and Canada write International Trading Operations.
570 Lexington Avenue, New York, NY 10022 U.S.A.
GEH-5029 0185 PSA

GENERAL  **ELECTRIC**