


SCALE X 10 = CURRENT IN AMPERES

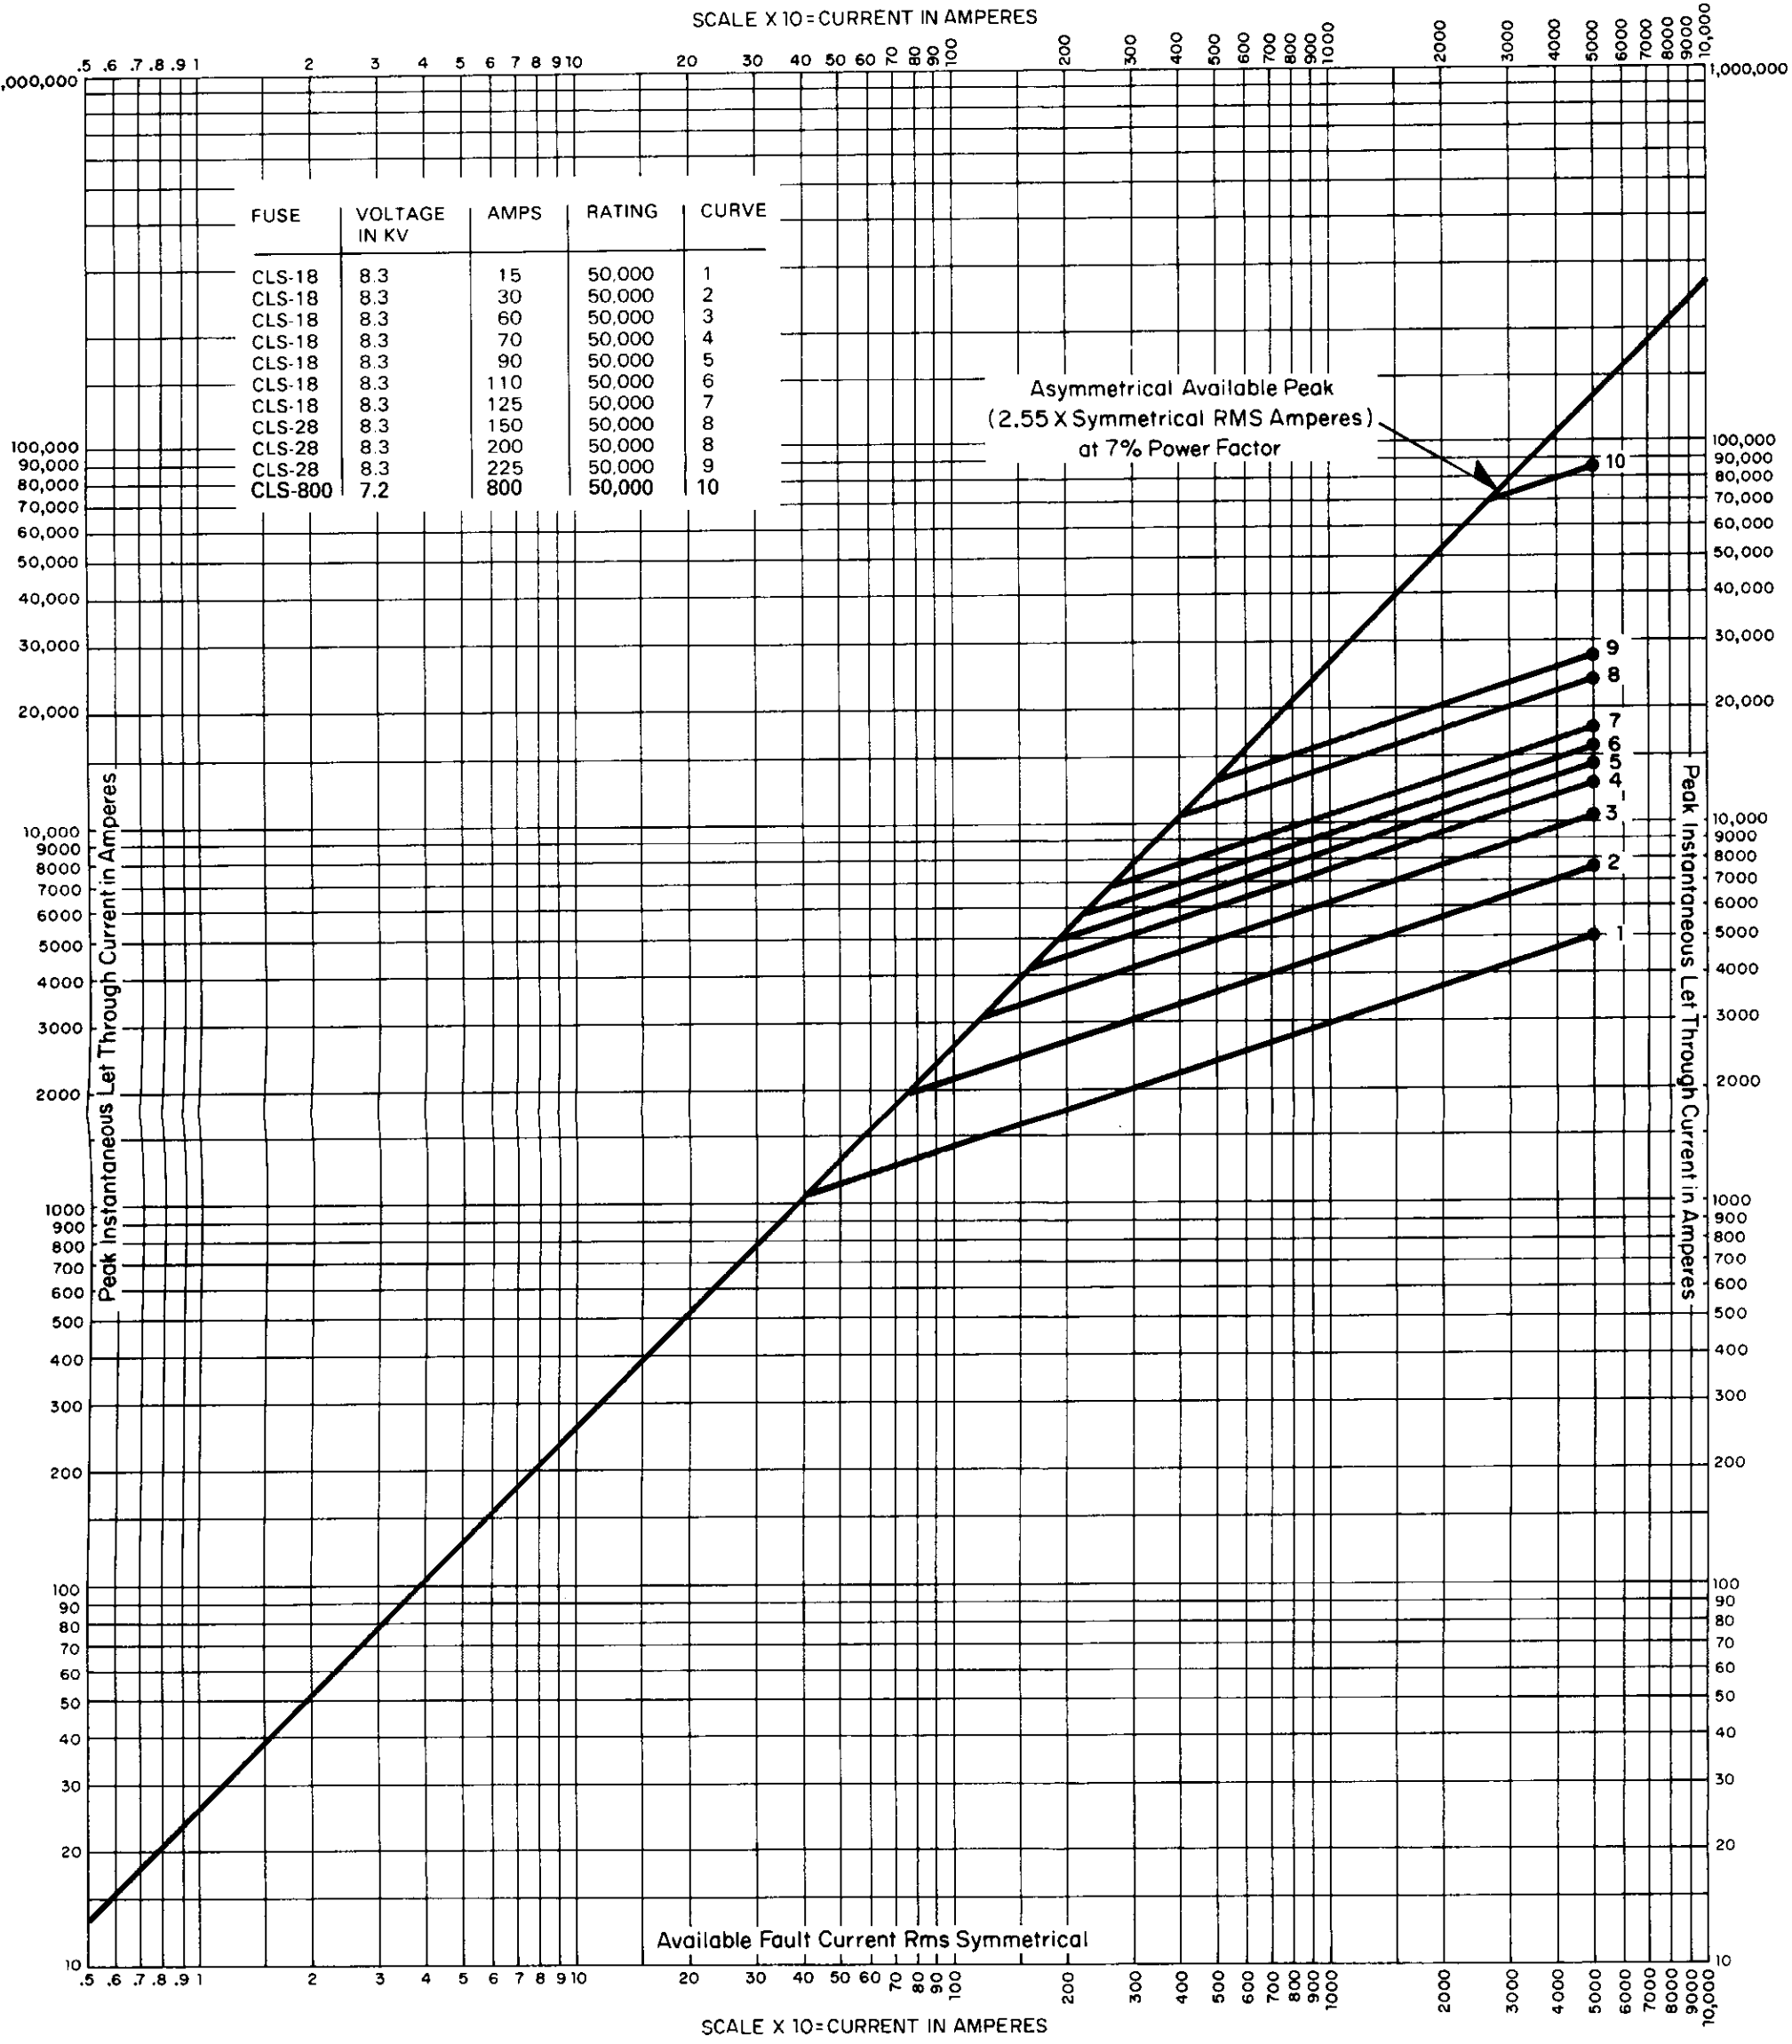

FUSE	VOLTAGE IN KV	AMPS	RATING	CURVE
CLS-18	8.3	15	50,000	1
CLS-18	8.3	30	50,000	2
CLS-18	8.3	60	50,000	3
CLS-18	8.3	70	50,000	4
CLS-18	8.3	90	50,000	5
CLS-18	8.3	110	50,000	6
CLS-18	8.3	125	50,000	7
CLS-28	8.3	150	50,000	8
CLS-28	8.3	200	50,000	8
CLS-28	8.3	225	50,000	9
CLS-800	7.2	800	50,000	10

Asymmetrical Available Peak
(2.55 X Symmetrical RMS Amperes)
at 7% Power Factor

Type CLS-18, CLS-28 and CLS-800® Motor Starter Current Limiting Fuses
Let-Thru Current Characteristics, 7.2-8.3 kV

● Added since previous issue.
Westinghouse Electric Corporation
Distribution and Control Business Unit
Greentree, PA 15220
Printed in USA

Supersedes Curve No. 10
dated January, 1986
July, 1986

10

Reference Data
Curve: 1 Thru 9
Ref. Curve No. 666798
Date: 12-2-75