



Standard Duty Pushbutton Stations

Surface Mounted



SDM15PB

Flush Mounted




SDF23PB

Surface Mounted



SDM35PB

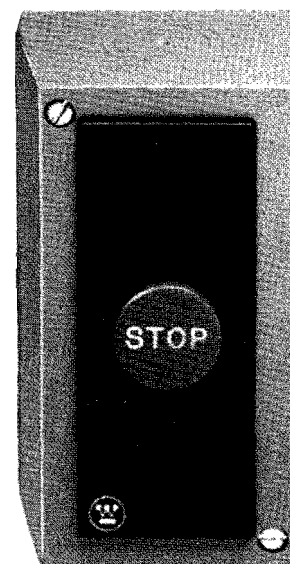

SDM12PB

www.ElectricalPartManual.com

Standard Duty Pushbutton Stations

Catalog Numbers and List Prices

Number of Units	Description	Contact Symbol	Surface Mounted NEMA Type 1 Enclosure		Flush Mounted NEMA Type 1B Stainless Plate	
			Catalog Number	List Price	Catalog Number	List Price
1 Unit	Start-1NO PB	1	SDM11PB	\$24		—
	Stop-1NO PB	1	SDM16PB	24		—
	Stop-1NC PB	2	SDM12PB	24		—
	Stop-1NCPB w/Lockout	2	SDM13PB	36		—
	On-Off-2NO Sel. Sw.	5	SDM14PB	24		—
	Hand-Off-Auto-2NO Sel. Sw.	6	SDM15PB	24		—
2 Unit	Start-Stop-1NO, 1NC PB	1, 2	SDM21PB	24	SDF21PB	\$32
	Start-Stop-1NO, 1NC PB w/Lockout Stop	1, 2	SDM22PB	36		—
	On-Off-1NO, 1NC PB	1, 2	SDM23PB	24	SDF23PB	32
	Open-Close-2NO PB	1, 1	SDM24PB	30		—
	Up-Down-2NO PB	1, 1	SDM25PB	30		—
	Raise-Lower-2NO PB	1, 1	SDM26PB	30		—
	For-Rev-2NO PB	1, 1	SDM27PB	30		—
	Fast-Slow-Stop-3NC, 2NO PB	3, 3, 2	SMD31PB	48		—
3 Unit	For-Rev-Stop-3NC, 2NO PB	3, 3, 2	SDM32PB	48		—
	Open-Close-Stop 3NO, 2NC PB	3, 3, 2	SDM33PB	48		—
	Up-Down-Stop-3NC, 2NO PB	3, 3, 2	SDM34PB	48		—
	Start-Stop w/Red Pilot Light-1NO, 1NC PB	1, 2, 4	SDM35PB①	88		—
	Start-Stop-HOA-1NO, 1NC PB/2NO Sel. Sw.	1, 2, 6	SDM36PB	48		—

① 120/240 Vac light. Replacement lamp – NE51H/BA2.

Description

Standard Duty Pushbutton stations are used with magnetic motor starters for starting, stopping, and reversing electric motors. Pushbuttons use momentary contact(s) while selector switches use maintained contact(s).


NEMA 1, surface mounted, non-metallic enclosures meet UL and CSA flame retardant standards. Stations are UL listed and CSA certified. Conduit entry hole provided at top of enclosure, knockout provided on bottom.

NEMA 1B, flush mount stations consist of pilot devices installed in a stainless steel faceplate, which can attach to any 4" x 4" x 2" junction box. They meet UL standards.


Contact blocks are color-coded (green for NO, red for NC), rated B600 VAC. See table below for details. All contacts contain inlaid silver for long life. Wiring terminals have self-lifting wire clamps. Contacts close with a wiping action to keep control surface clean.

Outline Dimensions, Inches (1, 2, or 3 Units)

Type 1 Enclosure

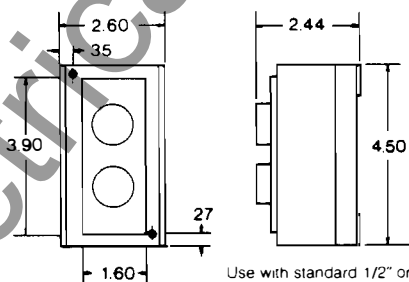


Type 1B Enclosure

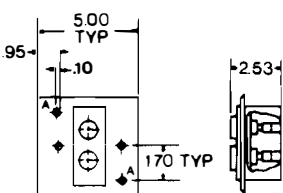

A-mounting holes for unit. Unit mounts in standard 4" x 4" x 2" junction box

Symbols

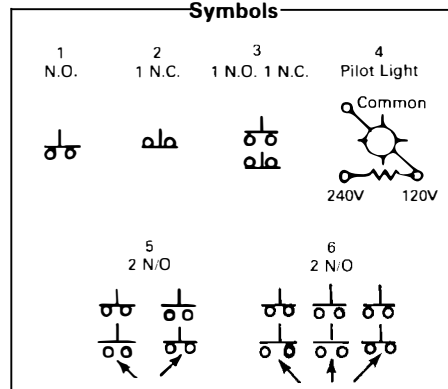

Contact Ratings

Current—	Ac Volts				Volt Amps
	120	240	480	600	
Inrush	30	15	7.5	6	3600
Breaking	3	1.5	0.75	0.6	360
Continuous	10	10	10	10	—
DC Rating	1.1	.55	—	20	—

Further Information

Oiltight Pushbuttons, Enclosed Cat. 25-000, page 410
 Starters, Enclosed Cat. 25-000, page 249
 Circuit Breakers, Enclosed Cat. 25-000, page 82
 Safety Switches Catalog Section 30-150
 UL File No. E82799