




September, 1986
Supersedes Dimension Sheet 38-728,
pages 1-2, dated January, 1978

Mailed to: E, D, C/38-000F

Relay and Static Control
15.5-38 Kv, 800 Amperes
110, 125, or 150 Kv BIL

Automatic Vacuum Circuit Reclosers Type ESV Adjustable Frame

Recloser With Adjustable Frame



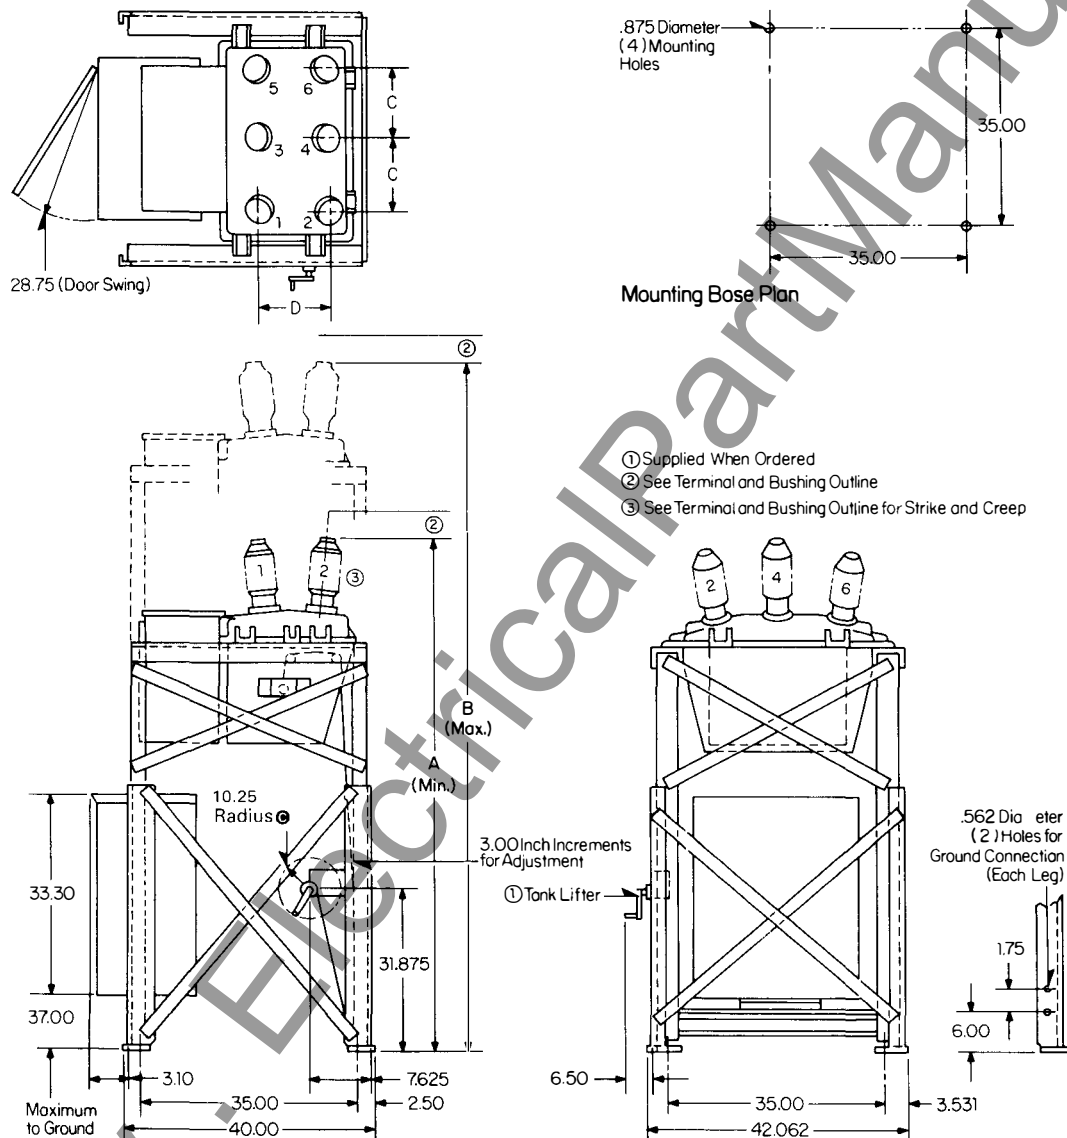


KV Bil Rating	A	B	C	D
125	82.250	112.250	12.625	11.625
150	87.250	117.250	13.562	12.562


6483A90



Type ESV Automatic Vacuum Circuit Reclosers
Recloser With Adjustable Frame

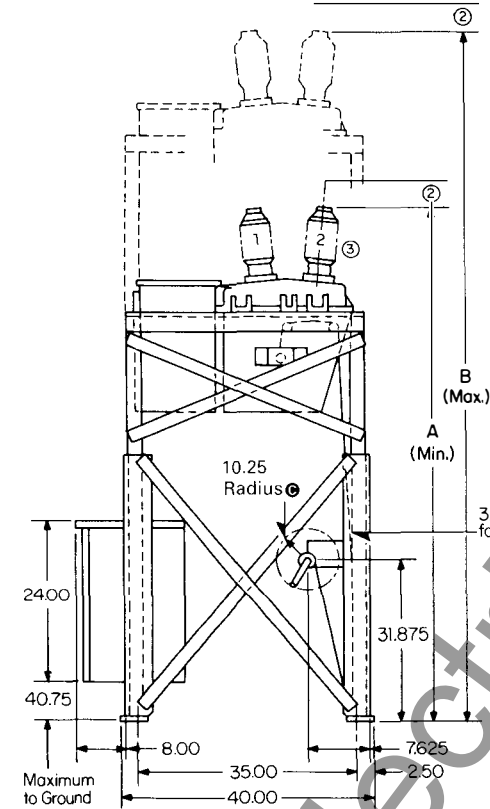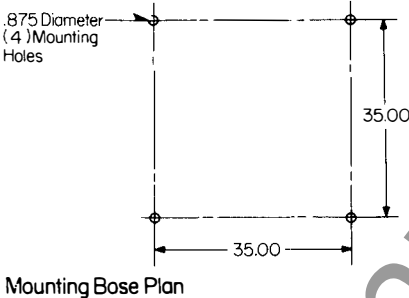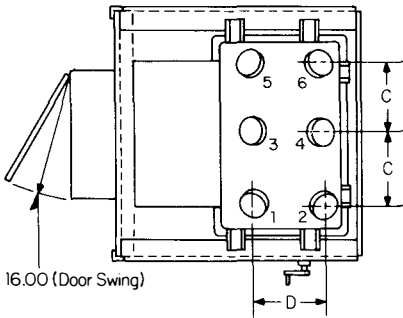

- ① Supplied When Ordered
- ② See Terminal and Bushing Outline
- ③ See Terminal and Bushing Outline for Strike and Creep

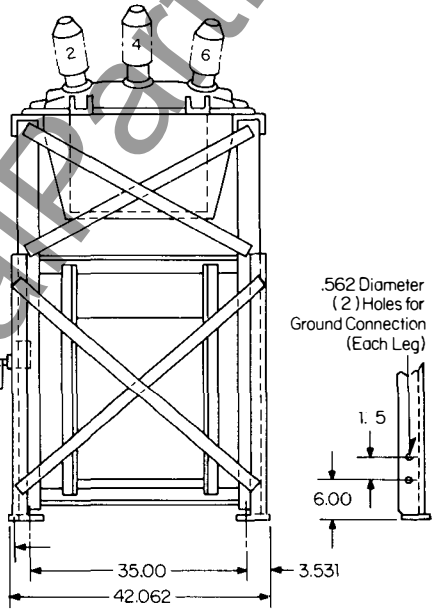

6483A91

KV Bil Rating	A	B	C	D
125	82.250	112.250	12.625	11.625
150	87.250	117.250	13.562	12.562

Ⓢ Changed since previous issue.

Westinghouse Electric Corporation
Distribution and Control Business Unit
Assemblies Division
Bloomington, Indiana 47401

Printed in USA




January 1978
New Information

Mailed to: E, D, C/1994/DB

Relay and Static Control
15.5-38 Kv, 800 Amperes
110, 125, or 150 Kv BIL

Automatic Vacuum Circuit Reclosers Type ESV Adjustable Frame

Recloser With Adjustable Frame


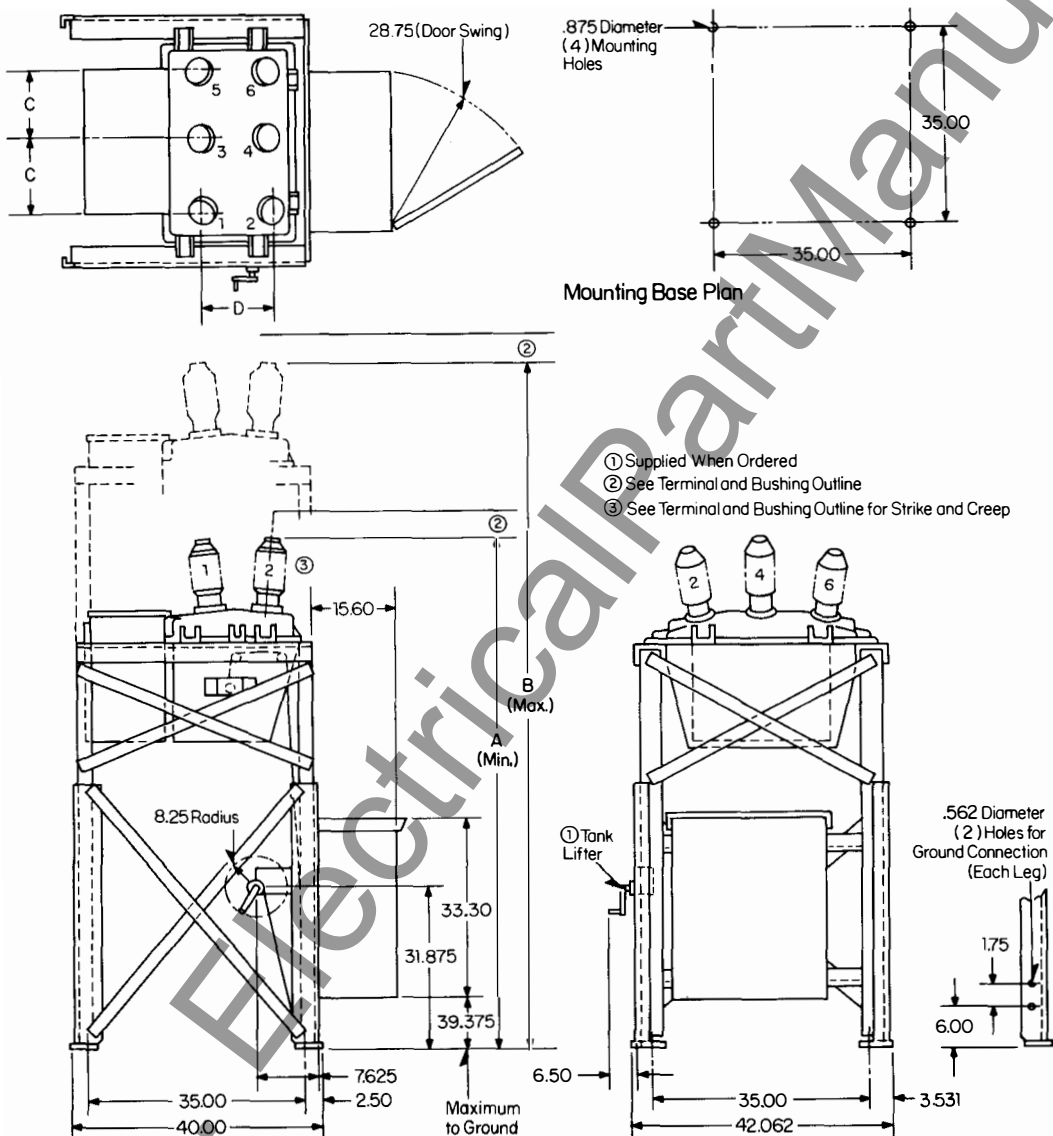


6483A92


KV Bil Rating	A	B	C	D
125	82.250	112.250	12.625	11.625
150	87.250	117.250	13.562	12.562




Recloser With Adjustable Frame

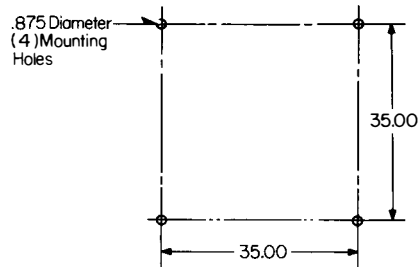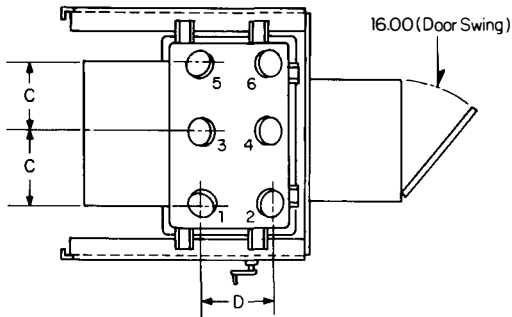

Mounting Base Plan

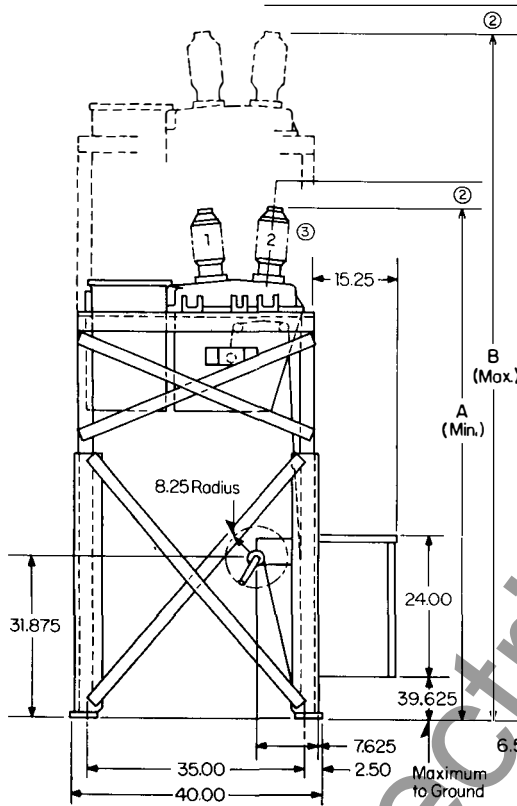

- ① Supplied When Ordered
- ② See Terminal and Bushing Outline
- ③ See Terminal and Bushing Outline for Strike and Creep

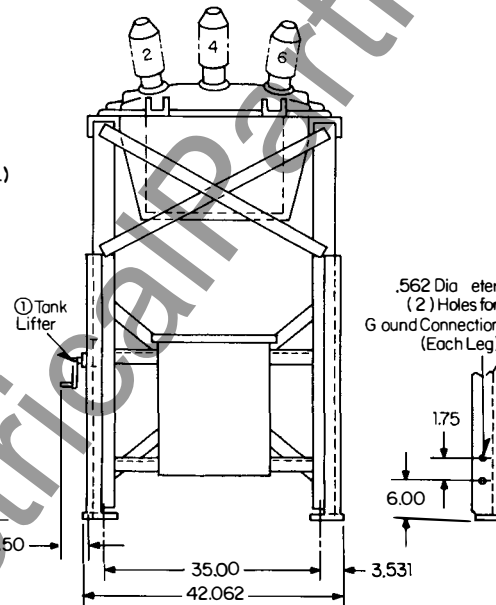

KV Bil Rating	A	B	C	D
125	82.250	112.250	12.625	11.625
150	87.250	117.250	13.562	12.562

6483493




January 1978
New Information

Mailed to: E, D, C/1994/DB


Relay and Static Control
15.5-38 Kv, 800 Amperes
110, 125, or 150 Kv BIL

Automatic Vacuum Circuit Reclosers Type ESV Adjustable Frame


Recloser With Adjustable Frame

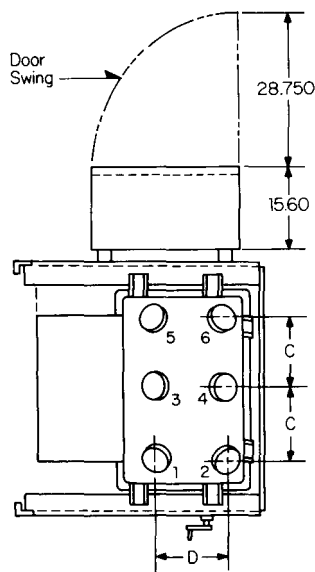


KV Bil Rating	A	B	C	D
125	82.250	112.250	12.625	11.625
150	87.250	117.250	13.562	12.562

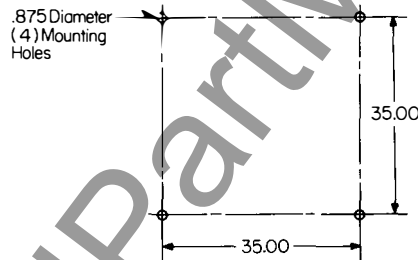

Mounting Base Plan

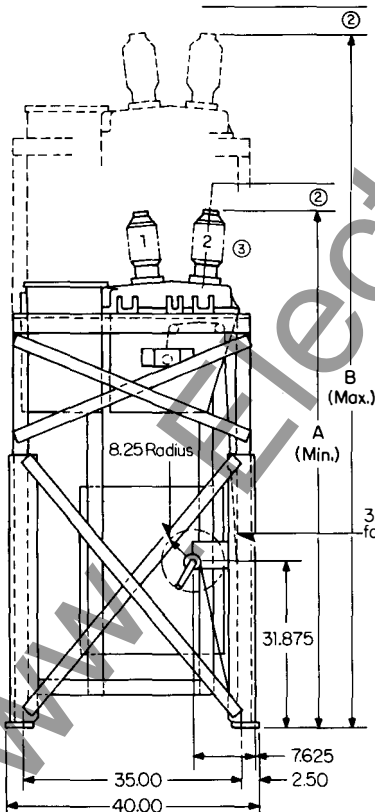


- ① Supplied When Ordered
- ② See Terminal and Bushing Outline
- ③ See Terminal and Bushing Outline for Strike and Creep

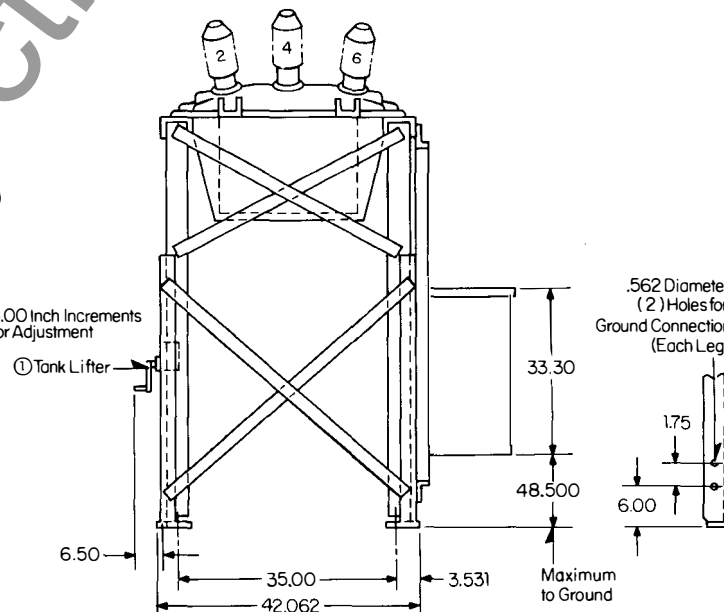





Recloser With Adjustable Frame

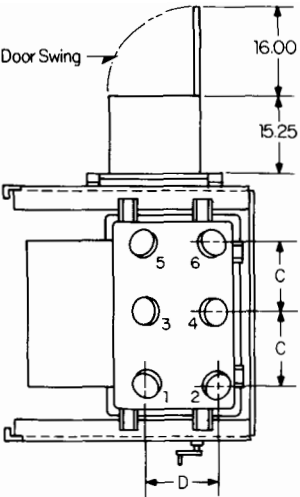


KV Bil Rating	A	B	C	D
125	82.250	112.250	12.625	11.625
150	87.250	117.250	13.562	12.562

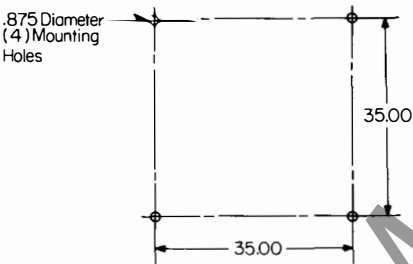

Mounting Base Plan

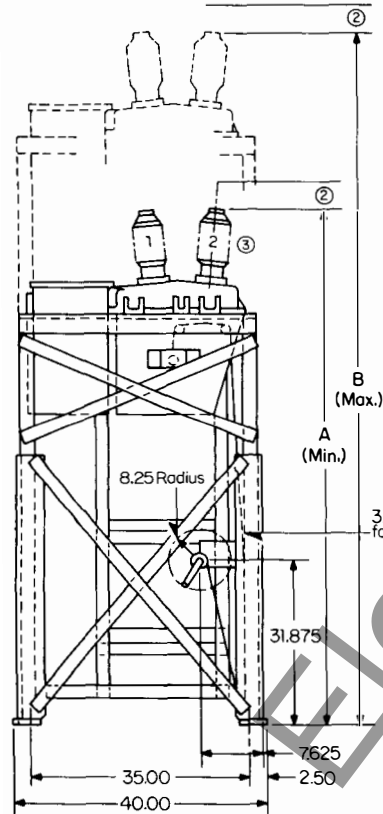

- ① Supplied When Ordered
- ② See Terminal and Bushing Outline
- ③ See Terminal and Bushing Outline for Strike and Creep

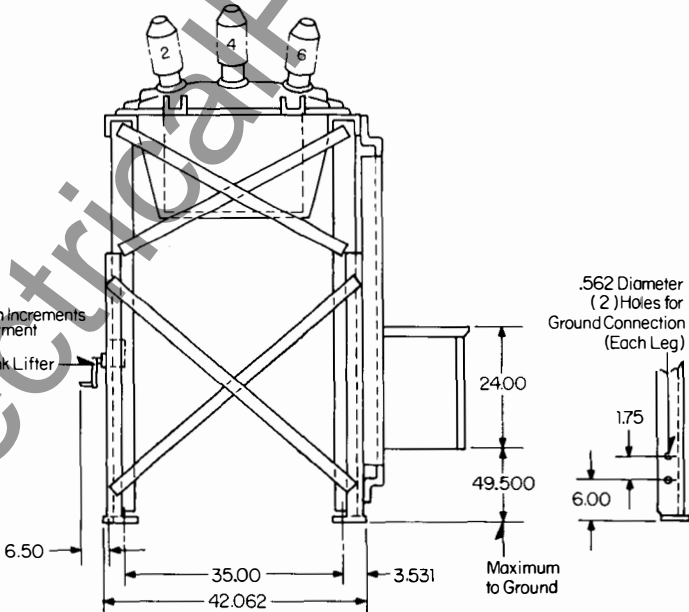

6483A95





January 1978
New Information

Mailed to: E, D, C/1994/DB

Relay and Static Control
15.5-38 Kv, 800 Amperes
110, 125, or 150 Kv BIL

Automatic Vacuum Circuit Reclosers Type ESV Adjustable Frame

ESV Recloser Pole Mounting Frame Without Tank Lifter

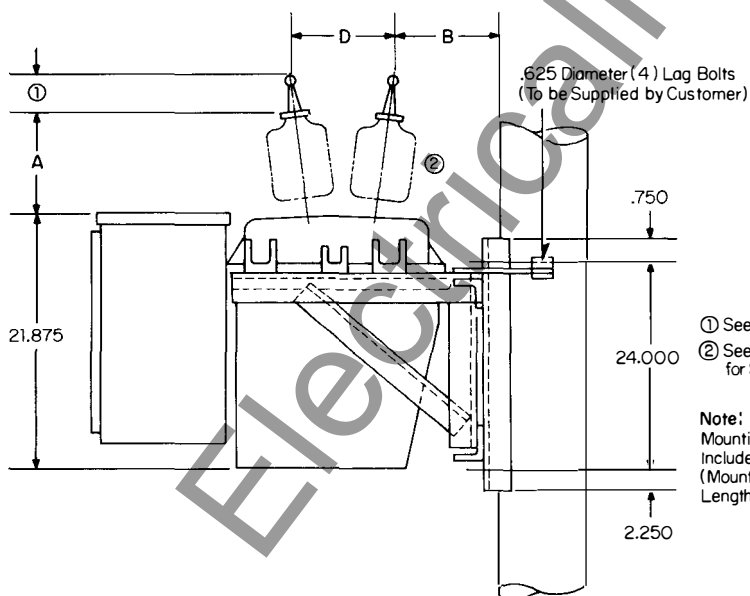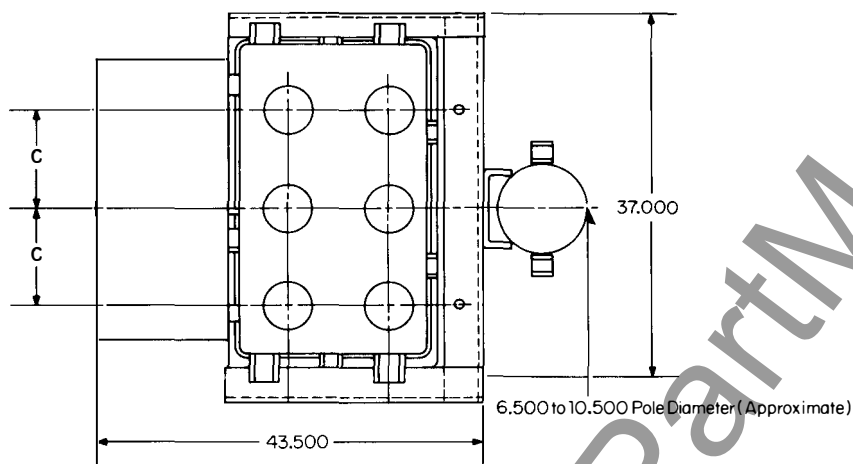

① See Terminal and Bushing Outline

② See Terminal and Bushing Outline
for Strike and Creep


Note: Provision for Two .750 Square Head
Mounting Bolts With Non-Turning Features
Included in Top Hole of Pole Bracket.
(Mounting Bolts to be Supplied by Customer)
Length of Bolt = Pole Diameter + 2.000 Minimum

Bil	A	B	C	D
125	9.750	13.875	12.625	11.625
150	14.750	13.500	13.562	12.562


6484A87



ESV Recloser Pole Mounting Frame With Tank Lifter

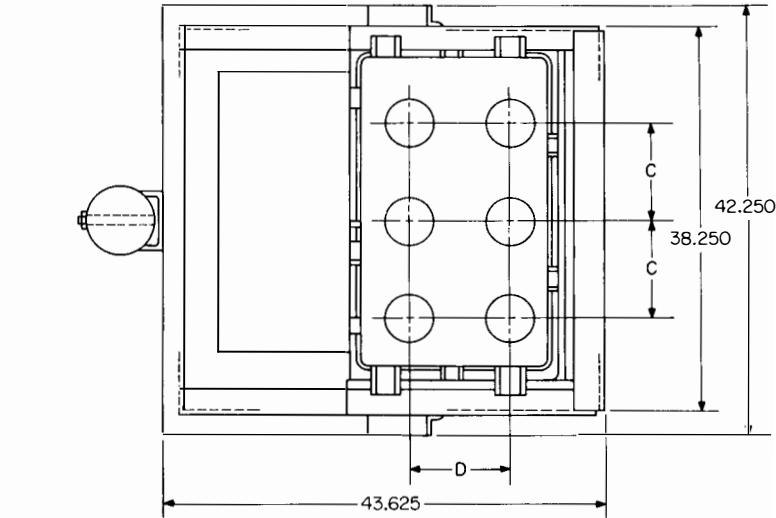

Note: Provision for Two .750 Square Head Mounting Bolts With Non-Turning and Jump-Proof Features Included in Top Hole of Pole Bracket. (Mounting Bolts to be Supplied by Customer) Length of Bolt = Pole Diameter + 2.000 Minimum

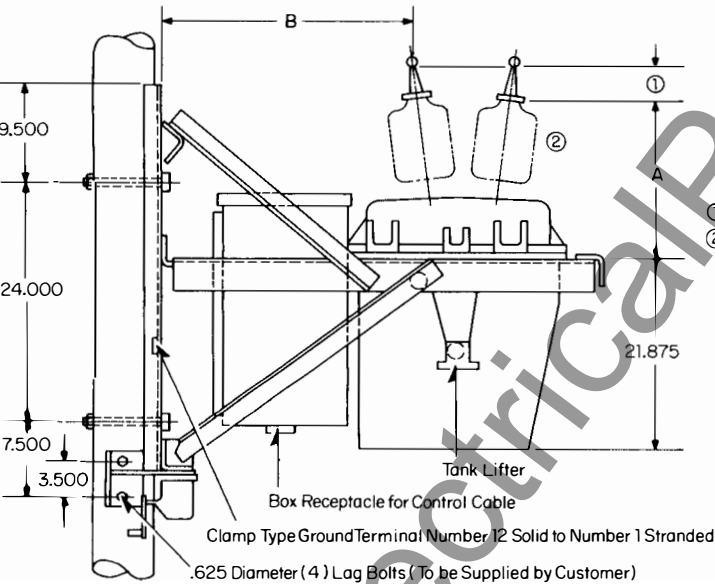

① See Terminal and Bushing Outline
② See Terminal and Bushing Outline for Strike and Creep

Bil	A	B	C	D
125	9.750	25.125	12.625	11.625
150	14.750	25.500	13.562	12.562



September, 1986
Supersedes Dimension Sheet 38-728,
pages 9-10, dated January, 1978


Mailed to: E, D, C/38-000F

Relay and Static Control
15.5-38 Kv, 800 Amperes
110, 125, or 150 Kv BIL

Automatic Vacuum Circuit Reclosers Type ESV Adjustable Frame


Terminal and Bushing Outlines

ESV Bushing and Clamp Connector Terminal for
125 Kv BIL

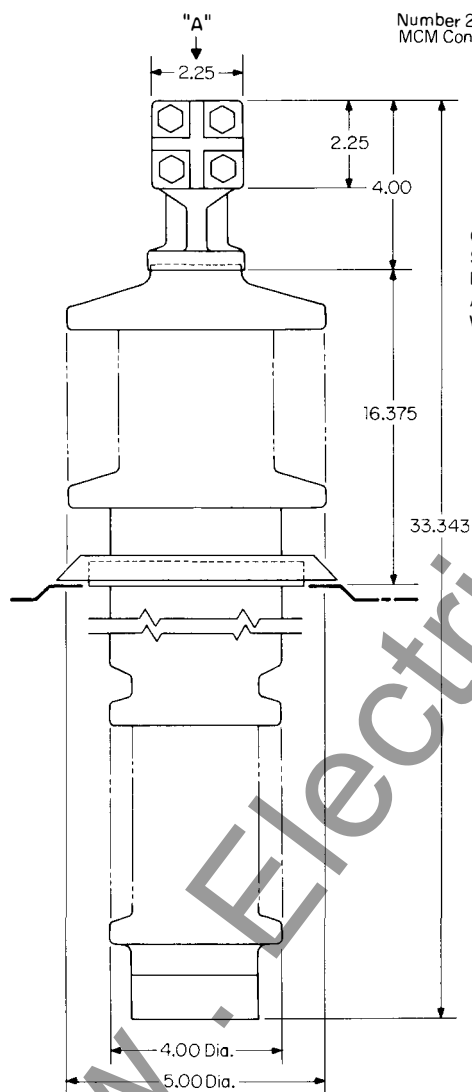

Creep — 25.50 Inches [Ⓢ]
Strike — 10.75 Inches
BIL — 125 Kv
Amperes — 800
Weight — 28 Lbs.

ESV Bushing and NEMA 4 Hole Pad Terminal for
125 Kv BIL

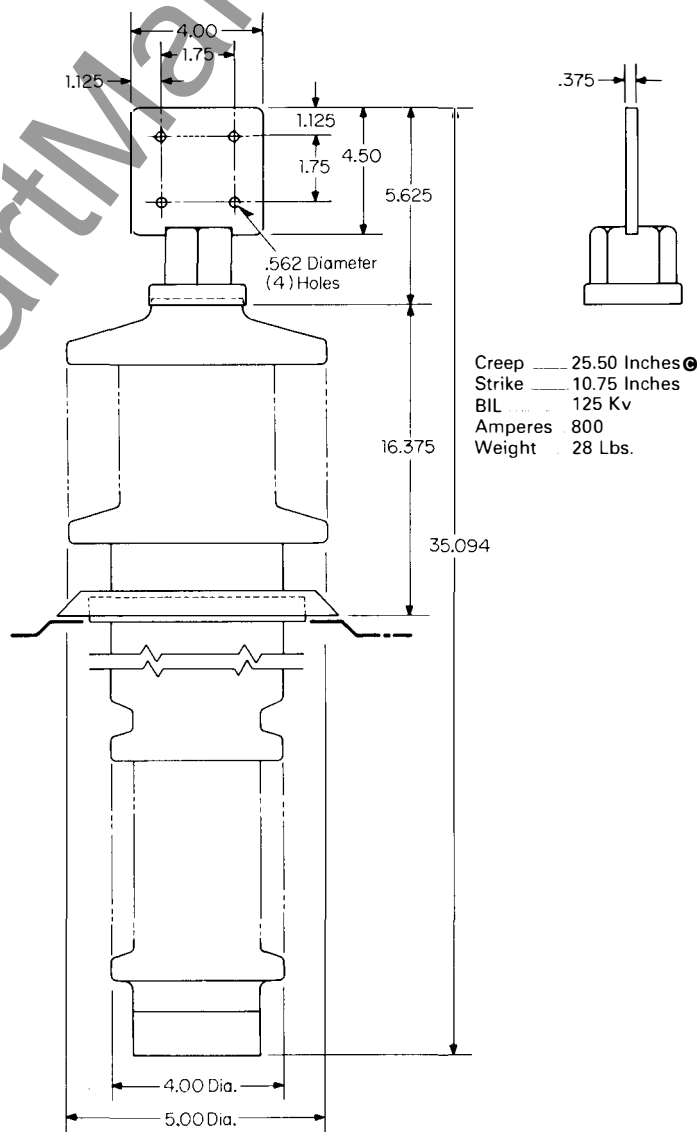

Creep — 25.50 Inches [Ⓢ]
Strike — 10.75 Inches
BIL — 125 Kv
Amperes — 800
Weight — 28 Lbs.

6483A98

6483A99




Type ESV Automatic Vacuum Circuit Reclosers


Terminal and Bushing Outlines (Continued)

ESV Bushing and Clamp Connector Terminal for 150 Kv BIL

ESV Bushing and NEMA 4 Hole Pad Terminal for 150 Kv BIL

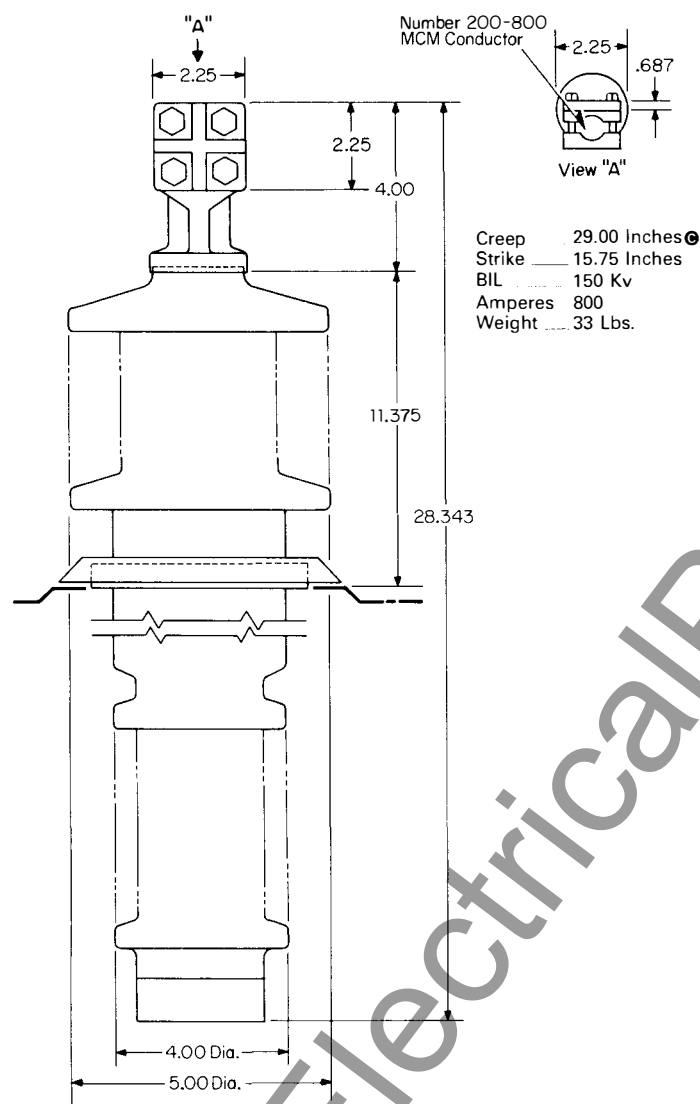

6483A96

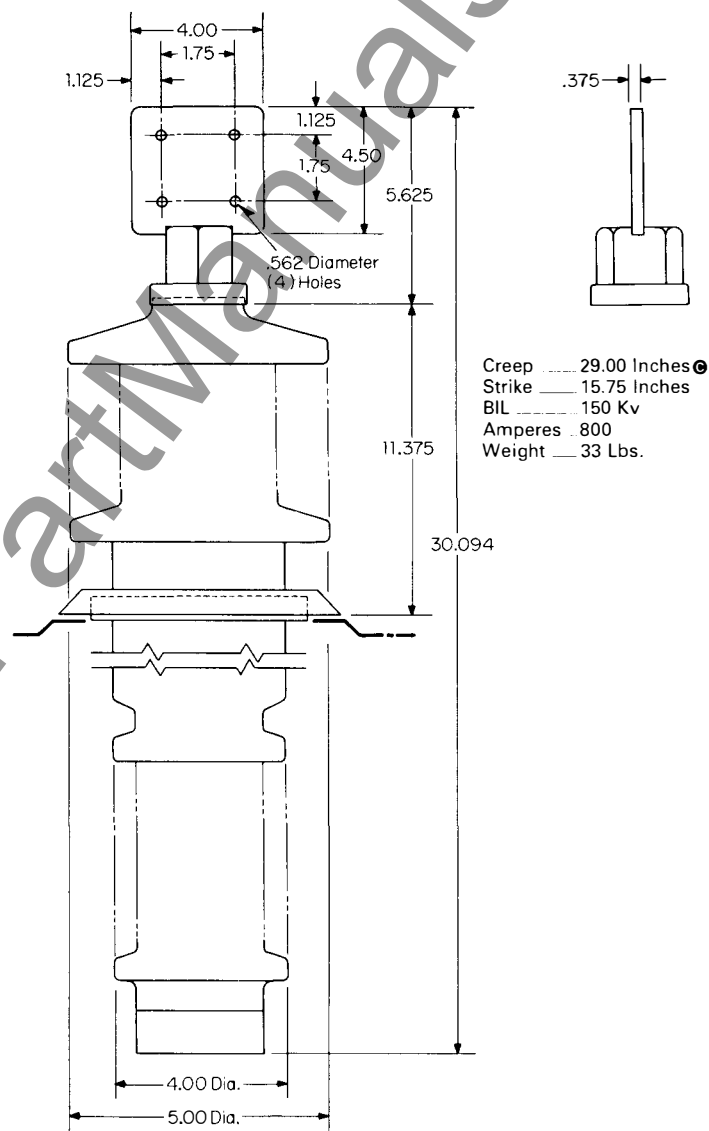

6483A97

Ⓢ Changed since previous issue.

Westinghouse Electric Corporation
Distribution and Control Business Unit
Assemblies Division
Bloomington, Indiana 47401

Printed in USA