





CP reverse phase relay

renewal
parts data

41-295

page 1

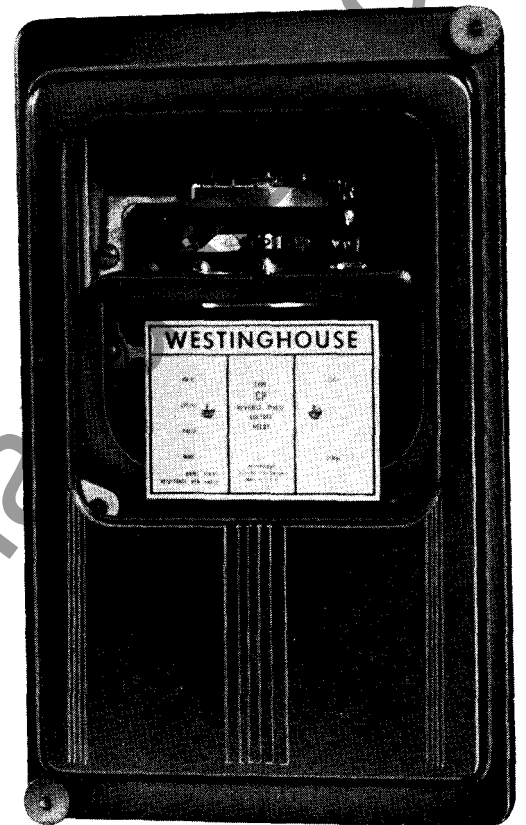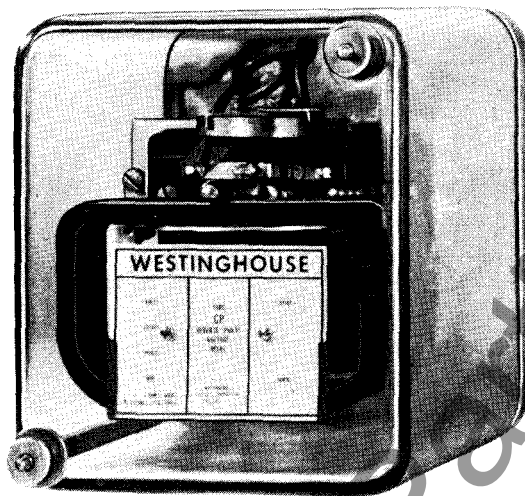

complete relay style numbers

volts	cycles■	standard rectangular	Flexitest® case		electromagnet reference 4
			flush	projection	
115	60	1056 283	1271 889	1273 889	506 596
230	60	1056 286	1271 895	1273 895	1544 902


■ For 25 or 50 cycle relays, order "similar to" listed styles, except to be "25 or 50 cycles."

ordering information

- Give the style number and name of part.
- Give the complete nameplate reading.
- State method of shipment desired.
- Send all orders or correspondence to nearest sales office of the company.

June, 1961

supersedes rpd 41-295 dated February, 1948
mailed to: E/679; D65-6A; C/559

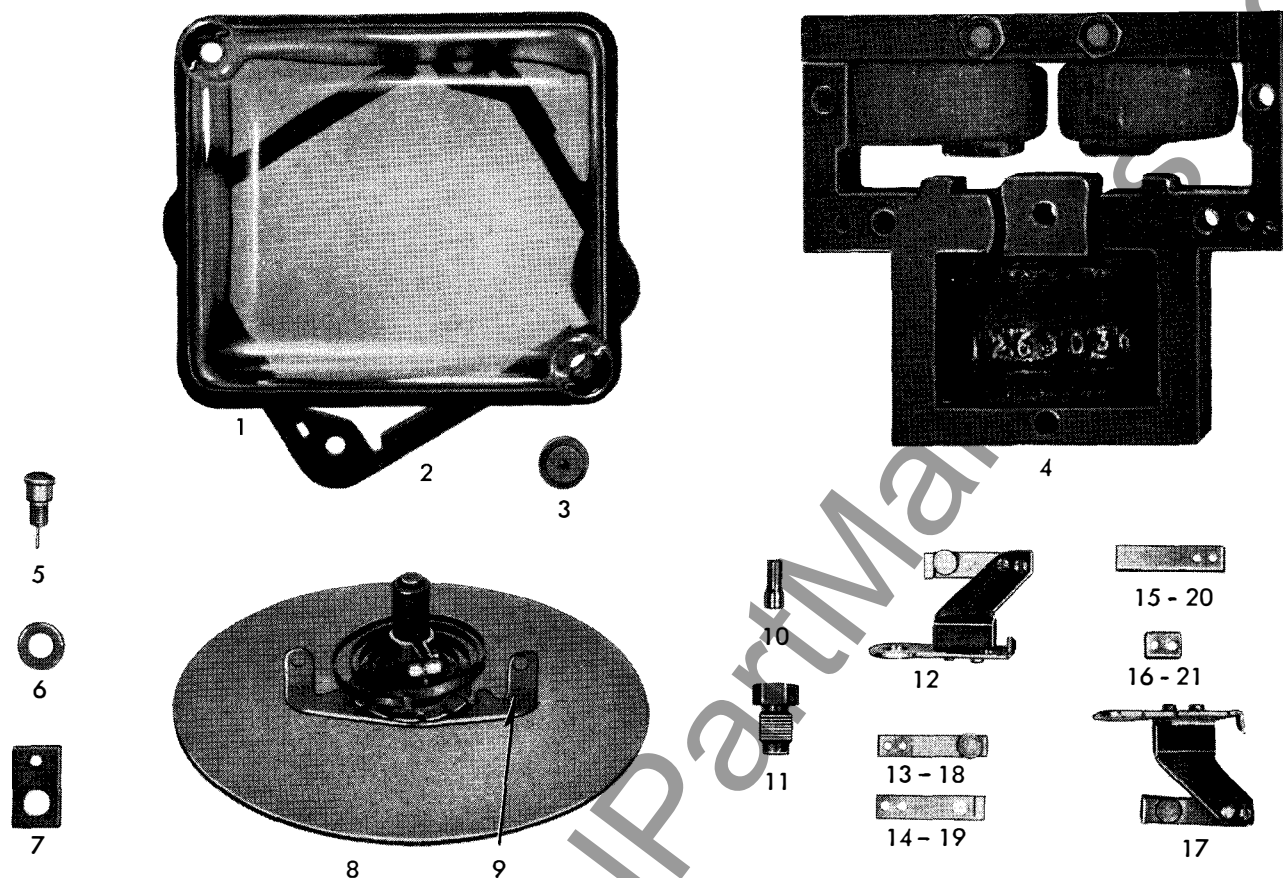

reference number	description of part	style number of part	number required
1	glass cover, for standard rectangular projection	1001 582	1
2	gasket, case to base seal, for standard rectangular projection	1001 561	1
3	thumb nut, for standard rectangular projection	704 110	2
4	electromagnet	see page 1	1
5	top bearing screw and pin	1009 811	1
6	spring washer for above	393 423	1
7	spacer between adjustable contacts and bearing screw	394 192	1
8	disc and shaft with moving contact spring and spring adjuster	1341 846	1
9	moving contact spring and adjuster assembly	1341 435	1
10	upper support of lower jewel bearing	427 147	1
11	lower jewel bearing and screw	214 869	1
12	adjustable stationary contact assembly with lever on insulation (left hand)	1337 354	1
13	stationary contact and spring	394 244	1
14	back stop for stationary contact	394 189	1
15	nut plate for mounting contact assembly to lever insulation	837 773	1
16	spacer between contact and back stop	394 190	1
17	adjustable stationary contact assembly with lever on insulation (right hand)	1337 353	1
18	stationary contact and spring	394 244	1
19	back stop for stationary contact	394 189	1
20	nut plate for mounting contact assembly to lever insulation	837 773	1
21	spacer between contact and back stop	394 190	1
△	resistors only for external resistor box for 115 volt relays only, 4750 ohms	1267 280	3
△	resistors only for external resistor box for 230 volt relays only 2000 ohms	1267 296	3

parts ind