





November 1984
New Information
Mailed to: E, D, C/36-600A

Indoor Type
2.4 to 23 kV
Disconnect and Non-Disconnect


Type CLE, CX, CXN and CLS Fuse Mountings and Live Parts Indoor Type

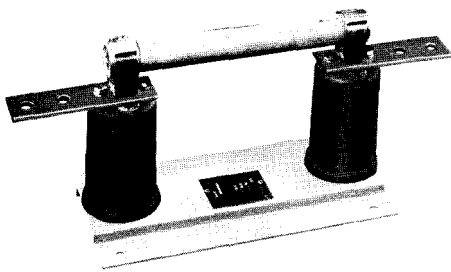


CLE-PT Fuse Mounting

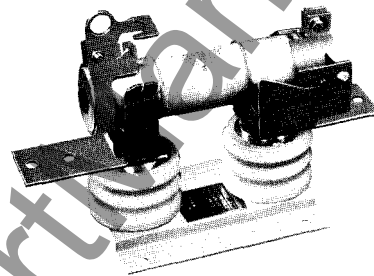

CLE-1 Disconnect Mounting

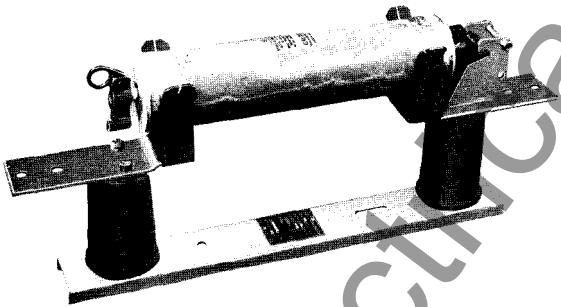

CXN Disconnect Mounting

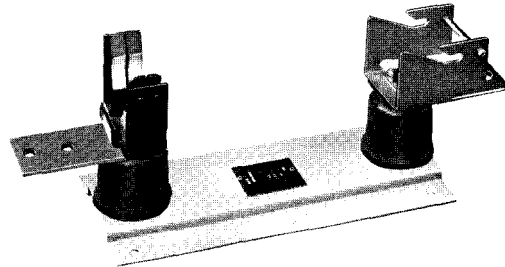

CLS-2 Disconnect Mounting

www.ElectricalPartManual.com



Type CLE, CX, CXN and CLS Fuse Mountings

Selection Data

CLE (Indoor) Mountings

Minimum Order Quantity Three (3) – No Returns

kV			Disconnect Type		Non-Disconnect Type	
Nom. Fuse	Nom. Ins.	BIL	Glass Polyester Ins.	Porcelain Ins.	Glass Polyester Ins.	Porcelain Ins.
			Style Number	Style Number	Style Number	Style Number
Size A (For 1 1/8" Ferrule diameter) Type CLE-PT Indicating 0.5E to 1.5E Amps						
4.8	4.8	60	9078A65G24	9078A65G01	9078A68G25	9078A68G01
7.2	7.2	75	9078A65G25	9078A65G02	9078A68G26	9078A68G02
14.4	13.8	95	9078A65G26	9078A65G03	9078A68G27	9078A68G03
14.4	14.4	110	9078A65G04	9078A68G04
23.0	23.0	150	9078A65G05	9078A68G05
Size B (For 1 3/8" Ferrule Diameter) Type CLE-PT Indicating 3E to 10E Amps						
4.8	4.8	60	9078A65G27	9078A65G06	9078A68G28	9078A68G06
7.2	7.2	75	9078A65G28	9078A65G07	9078A68G29	9078A68G07
14.4	13.8	95	9078A65G29	9078A65G08	9078A68G30	9078A68G08
14.4	14.4	110	9078A65G09	9078A68G09
Size C (For 2" Ferrule Diameter) Type CLE						
2.4	4.8	60	9078A65G30	9078A65G10	9078A68G31	9078A68G10
4.8	4.8	60	9078A65G31	9078A65G11	9078A68G32	9078A68G11
7.2	7.2	75	9078A65G32	9078A65G12	9078A68G33	9078A68G12
14.4	13.8	95	9078A65G33	9078A65G13	9078A68G34	9078A68G13
14.4	14.4	110	9078A65G14	9078A68G14
Size D (For 3" Ferrule Diameter) Type CLE-1 For Fuses 225 Amps and Below						
2.4	4.8	60	9078A65G34	9078A65G15	9078A68G35	9078A68G15
4.8	4.8	60	9078A65G35	9078A65G16	9078A68G36	9078A68G16
7.2	7.2	75	9078A65G36	9078A65G17	9078A68G37	9078A68G17
13.2	13.8	95	9078A65G37	9078A65G18	9078A68G38	9078A68G18
14.4	14.4	110	9078A65G19	9078A68G19
Size E (For 3" Ferrule Diameter Fuses) Type CLE-2 For Fuses Above 225 Amps						
2.4	4.8	60	9078A65G38	9078A65G20	9078A68G39	9078A68G20
4.8	4.8	60	9078A65G39	9078A65G21	9078A68G40	9078A68G21
7.2	7.2	75	9078A65G40	9078A65G22	9078A68G41	9078A68G22
14.4	14.4	110	9078A65G23	9078A68G23
Type CLE-3 For Fuses 150 to 200 Amps						
14.4	14.4	110	9078A68G24
Type CLE-750 For Fuses 600 to 750 Amps						
14.4	14.4	9078A70G02	9078A70G01

CLE Live Parts and Fuse Fittings

Minimum Order Quantity Three (3) – No Returns

	Fuse Type	Disconnect Type	Non-Disconnect Type
		Style Number	Style Number
Live Parts [Ⓢ]	CLE-PT (5-15kV) (23kV)	9078A64G01	9078A67G01
		9078A64G14	9078A67G12
	CLE	9078A64G02	9078A67G02
	CLE-1, 12	9078A64G03	9078A67G03
	CLE-2, 22	9078A64G04	9078A67G04
	CLE-3	9078A67G05
Fuse Fittings	CLE-PT	9078A63G01
	CLE	9078A63G02
	CLE-1, 12	9078A63G03
	CLE-2, 22	9078A63G03

Ⓢ One set includes hardware above, both insulators and fuse fittings (disconnect only).



Type CLE, CX, CXN and CLS Fuse Mountings

Selection Data

CX (Indoor Mountings)

Minimum Order Quantity Three (3) – No Returns

kV			Mounting Designation	Disconnect Type	Non-Disconnect Type
Nom. Ins.	Max. Design	BIL		Style Number	Style Number
4.8	5.5	60	A	151D885G01	151D884G01
7.2	8.3	75	B	151D885G02	151D884G02
13.2	14.5	95	C	151D885G03	151D884G03
Live Parts CX			..	151D885G05	151D884G08
Fuse Fitting CX			..	151D885G06

Further Information:

Application 36-715
 Technical Data: TD 36-711
 TD 36-713
 Prices: PL 36-609
 Dimensions: TCS 36-712

CXN (Indoor Mountings)

Minimum Order Quantity Three (3) – No Returns

kV		Mounting Designation	Disconnect Type	Non-Disconnect Type
Max. Design	BIL		Style Number	Style Number
8.3/14.4	95	D	9570D06G01	9570D05G02
8.3/14.4	95	E	9570D34G01	9570D05G02
8.3/14.4	95	F	9570D34G01	9570D33G01
8.3/14.4	95	G	9570D33G03
8.3/14.4	95	H	9570D33G01
Live Parts CXN ^①		D	9570D06G03	9570D05G06
		E	9570D34G02	9570D05G06
		F	9570D34G02	9570D33G02
		G	9570D33G04
		H	9570D33G02
Fuse Fitting CXN		D-F	9570D06G05
Paralleling Clamp for CXN Fuses		7275A85G02

CLS (Indoor Mountings)

Minimum Order Quantity Three (3) – No Returns

kV			Disconnect Type ^②	
Nom. Fuse	Nom. Ins.	BIL	Glass Polyester Insulators	Porcelain Insulators
			Style Number	Style Number
Size D (For 3" Ferrule Diameter) Type CLS-1 For Fuses 200 Amps and Below				
2.4	4.8	60	9078A69G10	9078A69G01
4.8	4.8	60	9078A69G11	9078A69G02
4.8	4.8	75	9078A69G12	9078A69G03
Size D (For 3" Ferrule Diameter) Type CLS-1 For Fuses Above 200 Amps				
2.4	4.8	60	9078A69G13	9078A69G04
4.8	4.8	60	9078A69G14	9078A69G05
4.8	7.2	75	9078A69G15	9078A69G06
Size E (For 3" Ferrule Diameter) Type CLS-2				
2.4	4.8	60	9078A69G16	9078A69G07
4.8	4.8	60	9078A69G17	9078A69G08
4.8	7.2	75	9078A69G18	9078A69G09

CLS Live Parts and Fuse Fittings

Minimum Order Quantity Three (3) – No Returns

	Fuse Type	Disconnect Type ^②
		Style Number
Live Parts ^①	CLS-1, 11, 13, 14 (Above 200 Amps) (200 Amps and Below)	9078A64G12 9078A64G03 9078A64G04
	CLS-2	9078A64G04
Fuse Fittings	CLS-1 (200 Amps and Below) (Above 200 Amps)	9078A63G03 9078A63G04 9078A63G03
	CLS-2	9078A63G03

^① One set includes hardware above both insulator and fuse fittings (disconnect only).
^② Non-disconnect CLE mountings are used as CLS non-disconnect mountings.



Type CLE, CX, CXN and CLS Fuse Mountings

www.ElectricalPartManuals.com

Printed in USA

Westinghouse Electric Corporation
Distribution and Protection Business Unit
Commercial Division
Sumter, SC 29150

November 1984