



www.electrical.com

June 2, 1976
Supersedes 3520 P WE A Price List
pages 1 and 2 dated April 27, 1976
Prices effective June 2, 1976 and
subject to change without notice.
(Refer to Selling Policy 3000 S WE A)
Mailed to: E, D, C/1747/PL

Shunt or Stabilized Shunt Wound
Basic Prices, Frames 256A-685A
7½ to 500 Horsepower
Class F Insulation, 40°C Ambient
1.00 Service Factor

Standard-Line Life-Line® S Drip-proof Guarded Dc Motors

Life Line S, Standard-Line Dc Motors are available in frames 256A thru 685A, 7.5 hp thru 500 hp, either 1750 rpm or 1150 rpm. Included are the following features.

F-1 Assembly (conduit box location)

Fields are Good for Continuous Excitation.

Thermoguard®

Ball Bearings

Class F Insulation

1.00 Service Factor

Modifications are limited to:

Motor Mounted Blower

Tachometer Mounting

F-2 Assembly

240 Volt Field

1.15 Service Factor

Modification Kits are available, see page 2.

Hp	1750 Rpm				1150 Rpm			
	Frames ②	Max. Speed Rpm	Style Number	List ① Price W-23	Frames ②	Max. Speed Rpm	Style Number	List ① Price W-23
240 Volt Armature, 150/300 Volt Field								
7.5	256A	2300	2644B40G08	\$ 1670	283AT	2000	2644B41G08	\$ 2032
10	256A	2300	2644B40G09	1905	284AT	2000	2644B41G09	2301
15	283AT	2300	2644B40G10	2294	286AT	2000	2644B41G10	2805
20	283AT	2300	2644B40G11	2632	324AT	2000	2644B41G11	3247
25	284AT	2300	2644B40G12	2963	326AT	2000	2644B41G12	3726
30	286AT	2300	2644B40G13	3262	327AT	2000	2644B41G13	4115
40	324AT	2100	2644B40G14	3838	364AT	2000	2644B41G14	4889
50	326AT	2100	2644B40G15	4384	366AT	2000	2644B41G15	5630
60	326AT	2100	2644B40G16	5018	367AT	2000	2644B41G16	6434
75	364AT	2100	2644B40G17	5897	408AT	2000	2644B41G17	7592
100	367AT	2000	2644B40G18	7398	448AT	2000	2644B41G18	9245
500 Volt Armature, 150/300 Volt Field								
15	283AT	2300	2644B42G10	\$ 2294	286AT	2000	2644B43G10	\$ 2805
20	283AT	2300	2644B42G11	2632	324AT	2000	2644B43G11	3247
25	284AT	2300	2644B42G12	2963	326AT	2000	2644B43G12	3726
30	286AT	2300	2644B42G13	3262	327AT	2000	2644B43G13	4115
40	324AT	2100	2644B42G14	3838	364AT	2000	2644B43G14	4889
50	326AT	2100	2644B42G15	4384	366AT	2000	2644B43G15	5630
60	327AT	2100	2644B42G16	5018	367AT	2000	2644B43G16	6434
75	364AT	2100	2644B42G17	5897	408AT	2000	2644B43G17	7592
100	367AT	2000	2644B42G18	7398	448AT	2000	2644B43G18	9245
125	408AT	2000	2644B42G19	8762	506AT	2000	2644B43G19	10836
150	447AT	2000	2644B42G20	10087	506AT	2000	2644B43G20	12460
200	448AT	1900	2644B42G21	12794	508AT	1800	2644B43G21	15422
250	506AT ③	1900	2644B42G22	15732 ⑥	585A ③	1700	2644B43G22	18522 ⑥
300	507AT ③	1900	2644B42G23	18864 ⑥	586A ③	1600	2644B43G23	21726 ⑥
400	B586A ③	1900	2644B42G24	26208 ⑥	685A ③	1500	2644B43G24	28800 ⑥
500	B587A ③	1900	2644B42G25	35040 ⑥	685A ③	1500	2644B43G25	36882 ⑥

① Prices shown are in U.S.A. dollars.

② Frame sizes are tentative. Westinghouse reserves the right to substitute frames at no change in price.

③ This rating must be force ventilated. Price shown does not include blower. For price of blower, see item 1, Motor Mounted Blower Kits, on page 2.

⑥ Changed since previous issue.

www.electrical.com



Modification Kits

Kits will be shipped separately. If mounting at the factory is required, add the appropriate mounting charge.

1. Motor Mounted Blower Kits

Frame Series	Style Number	List Price ^① W-23
Blower Kit Without Filter		
250	873A378G02	\$364
280	2224C59G04	405
320	2224C60G05	506
360	2224C60G06	506
400	2231C09G05	573
440	2231C10G05	573
500	2231C10G06	714
580 ^②	714
680 ^②	1311
Filter For Blower Kit		
250	2230C08G05	\$ 194
280	2228C81G07	253
320	2228C84G07	249
360	2228C84G07	249
400	2231C11G07	280
440	2231C12G07	280
500	2231C12G07	321
580 ^②	321
680 ^②	550

① Prices shown are in U.S.A. dollars.
② Blowers for 580 and 680 frame series are not available as kits. They must be factory mounted.
Add \$200 list. mounting charge.

Note: Blower motor is 3 phase, 60 hertz, 230/460 volts, except 250 frame which uses single phase, 60 hertz, 115 volts.

Factory mounting charge. . . . Add \$200 list.

2. Tachometers

Tachometers are available factory mounted for the list price shown in the table below.

For customers who wish to supply and mount their own tachometer, mounting kits are available. Kit consists of tachometer mounting bracket, stub shaft and coupling.

Tachometer	Tachometer Output		Tachometer Style Number	Mounting Kit Style Number	List Price, W-23	
	AC/DC	Volts per 1000 Rpm			Tachometer and Mounting Kit Factory Mounted	Mounting Kit Only does NOT include Factory Mounting
Sigmaton	AC	100	1460A45G02	2226C87G02	\$ 384	\$183
Servotek	DC	20.8	871A996G01	2226C88G02	630	183
5 Py	AC	28	210A355G10	2226C86G02	384	183
5 Py	DC	50	210A355G09	2228C86G02	630	183
BC 42	DC	50	210A355G01	2226C44G02	911	183
BC 46	DC	50	210A355G04	2226C44G03	1267	183

3. F-2 Assembly (Conduit Box Location)

Standard conduit box location is F-1 assembly (right side when viewing motor from front or commutator end).

Note: Other modifications are NOT available for Standard-Line Motors. For other modifications, motor must be priced from Price Lists 3520 P WE A, pages 3-6, and 3530 P WE A, pages 1-8.

For motor to be factory assembled F-2 assembly. Add \$210 list.

4. 240 Volt Fields

240 volt fields are available on motors with either 240 volt armature or 500 volt armature at no addition in price when specified. Order as Style number, except 240 volt field.

5. Service Factor

For 1.15 service factor add 7% to the base price. Refer to Westinghouse for frame size.



June 2, 1976
 Supersedes 3520 P WE A
 Price List
 pages 3 and 4, dated November 24, 1975
 Prices effective June 2, 1976 and
 subject to change without notice.
 (Refer to Selling Policy 3000 S WE A)
 Mailed to: E, D, C/1747/PL

Shunt and Stabilized Shunt Wound
 ½ to 1250 Horsepower
 Class F Insulation, 40°C Ambient
 1.00 Service Factor
 For Use With Rectified Power Supplies

Specific Purpose Life-Line® S Drip-proof Guarded Dc Motors

Drip-proof Guarded Dc Motors Power Supply Type K

Hp	Base Speed, Rpm	Maximum Speed, Rpm	180 Volts	
			Frame ③	List ① Price W-20
¾	1150	1380	187A	\$ 684
1	1750	2050	187A	657
	1150	1380	187A	750
1½	2500	2500	187A	665
	1750	2050	187A	747
	1150	1380	187A	885
2	2500	2500	187A	729
	1750	2050	187A	833
	1150	1380	216A	1040
3	2500	2500	187A	854
	1750	2050	216A	1026
	1150	1380	218A	1580
5	2500	2500	216A	1182
	1750	2050	21 8A	1638
	1150	1380	256A	2021


Drip-proof Guarded Dc Motors, Power Supply Type C or D

Hp	Base Speed, Rpm	Max. Speed, Rpm	240 Volts		500-550 Volts②		
			Frame ③	List ① Price W-20	Frame ③	List ① Price W-20	
¾	850	1700	187A	\$ 730	
			187A	855	
			21 6A	990	
			21 8A	1125	
¾	1150	2000	187A	684	
			187A	810	
			187A	935	
			21 6A	1725	
1	1750	2300	187A	657	187A	\$ 810	
			1150	1900	21 6A	938	
			850	1700	218A	1103	
			650	1700	
1	500	1600	21 6A	1632	
			21 8A	1827	
			256A	2090	
			400	1600	
1½	3500	3500	187A	657	
			2500	3000	187A	818	
			1750	2300	187A	900	
			1150	2000	21 6A	1038	
2	850	1700	21 6A	1521	21 6A	1674	
			21 8A	1782	
			256A	2060	
			283AT	2412	
	2	3500	3500	187A	723
				2500	3000	187A	882
				1750	2300	187A	986
				1150	2000	216A	1193
3	850	1700	21 8A	1616	21 8A	1769	
			256A	1917	
			283AT	2300	
			283AT	2691	
	3	300	1200	284AT	3114
				3500	3500	187A	822
				2500	3000	187A	854
				1750	2300	21 6A	1026
3	1150	2000	21 8A	1580	21 8A	1733	
			850	1700	256A	1926	
			650	1700	283AT	2273	
			500	1600	283AT	2741	
	3	400	1600	284AT	3222
				300	1200	324AT	3812
				3500	3500	187A	1071
				2500	3000	216A	1182
5	1750	2300	21 8A	1638	218A	1791	
			1150	2000	256A	2021	
			850	1700	283AT	2421	
			650	1700	283AT	2915	
	5	500	1600	286AT	3468
				400	1600	324AT	4190
				300	1200	327AT	4895
			

① Prices shown are in U.S.A. dollars.

② 550 volt motor frames will generally be the same as 500 volt motor frames. For exact frame, refer to Westinghouse.

③ Frame sizes are tentative. Westinghouse reserves the right to substitute frames at no change in price.

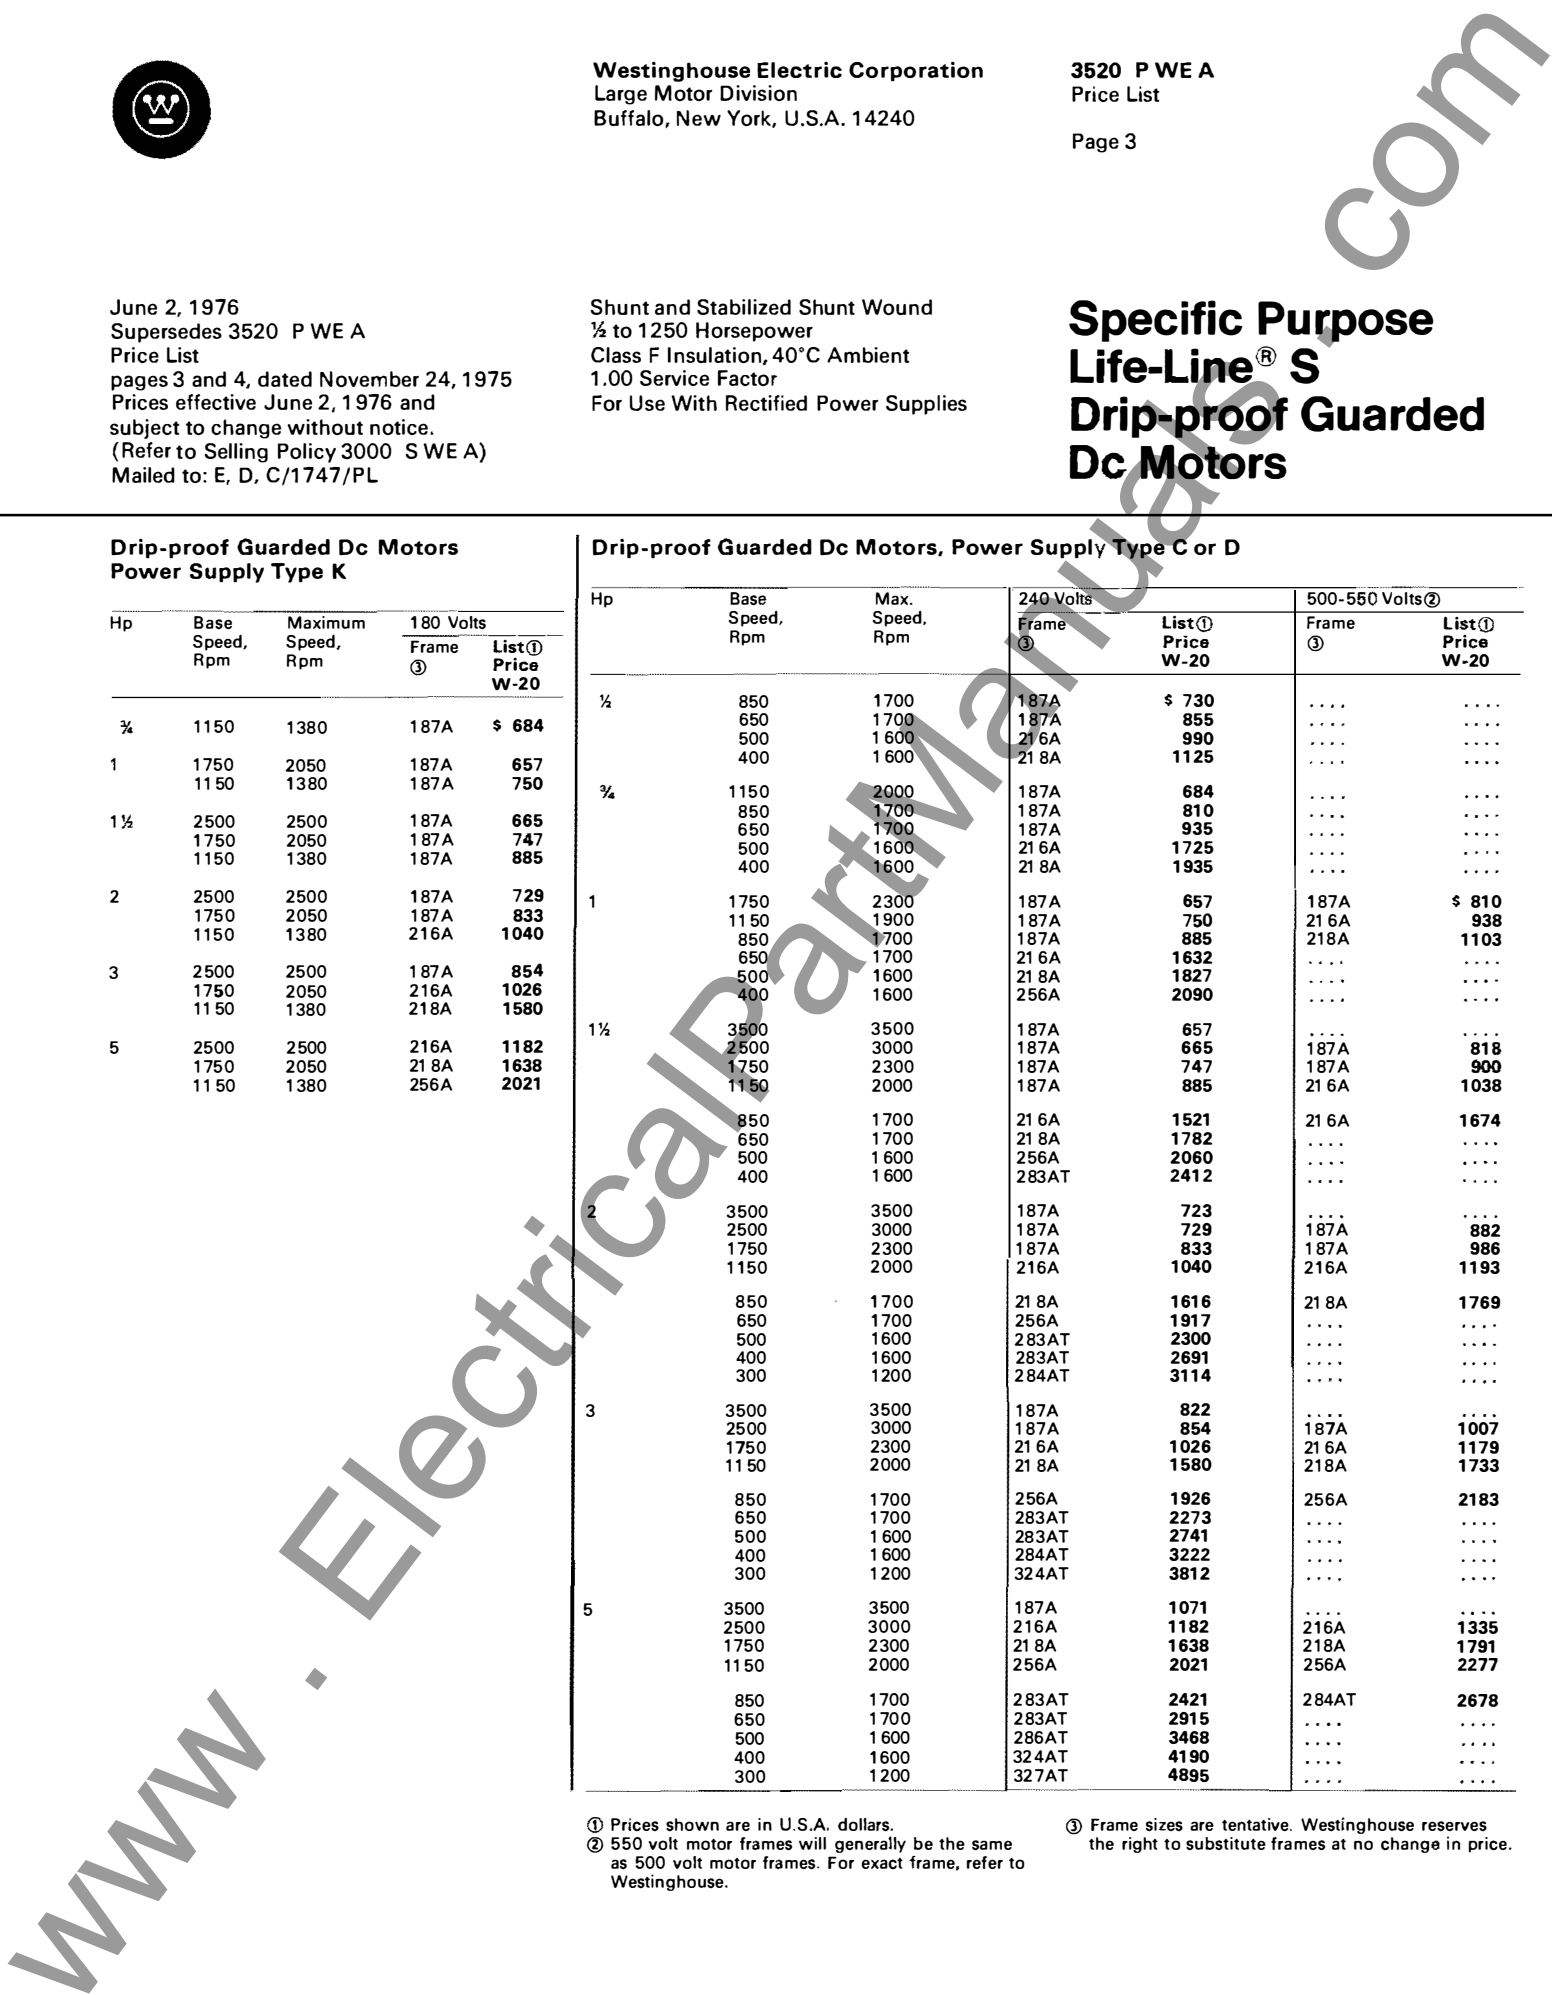



Drip-proof Guarded Dc Motors, Power Supply Type C or D, Continued

Hp	Base Speed, Rpm	Max. Speed, Rpm	Frame ^③ 240 Volts	500 Volts ^②	List ^① Price W-20
7½	3500	3500	216A	\$ 1445
	2500	3000	218A	218A	1677
	1750	2300	256A	256A	1998
	1150	2000	283AT	283AT	2439
	850	1700	283AT	283AT	2894
	650	1600	286AT	286AT	3500
	500	1500	324AT	324AT	4185
	400	1200	327AT	327AT	5129
	300	900	366AT	366AT	6125
	10	3500	3500	218A
2500		3000	218A	218A	1929
1750		2300	256A	283AT	2291
1150		2000	284AT	284AT	2786
850		1700	286AT	286AT	3330
650		1600	324AT	324AT	4095
500		1500	327AT	327AT	4850
400		1200	364AT	364AT	5972
300		900	367AT	367AT	7172
15		3500	3500	256A
	2500	3000	256A	283AT	2340
	1750	2300	283AT	283AT	2777
	1150	2000	286AT	286AT	3416
	850	1700	324AT	324AT	4073
	650	1600	327AT	327AT	5063
	500	1500	366AT	366AT	6066
	400	1200	367AT	367AT	7317
	300	900	408AT	508AT	9012
	20	3500	3500	256A
2500		3000	283AT	283AT	2696
1750		2300	283AT	283AT	3200
1150		2000	324AT	324AT	3969
850		1700	327AT	327AT	4869
650		1600	364AT	364AT	6030
500		1500	367AT	367AT	7169
400		1200	408AT	448AT	8717
300		900	408AT ^⑤	508AT	10547
25		3500	3500	256A
	2500	3000	283AT	283AT	2991
	1750	2300	284AT	284AT	3614
	1150	2000	326AT	326AT	4568
	850	1700	364AT	364AT	5558
	650	1600	367AT	367AT	6908
	500	1500	408AT	447AT	8217
	400	1200	406AT ^⑤	448AT	9963
	300	900	408AT ^⑤	508AT	11865
	30	3500	3500	283AT
2500		3000	283AT	283AT	3288
1750		2300	286AT	286AT	3987
1150		2000	327AT	327AT	5054
850		1700	366AT	366AT	6179
650		1600	406AT	408AT	7605
500		1500	408AT	447AT	9117
400		1200	408AT ^⑤	448AT ^⑤	10974
300		900	448AT ^⑤	508AT	13413
40		3500	3500	283AT
	2500	3000	284AT	284AT	3842
	1750	2100	324AT	324AT	4707
	1150	2000	364AT	364AT	6021
	850	1700	367AT	408AT	7358
	650	1600	408AT	448AT	9000
	500	1500	408AT ^⑤	507AT ^④	10862
	400	1200	448AT ^⑤	448AT ^{④⑤}	12945
	300	900	506AT ^⑤	508AT	15915

Drip-proof Force Ventilated Power Supply Type C [Ⓢ] (see footnote [Ⓢ])

Hp	Base Speed, Rpm	Max. Speed, Rpm	Frame ^③ 500 Volts ^②	List ^① Price W-21 [Ⓢ]
300	1750	1900	507AT ^⑤	\$ 23490
	1150	1600	586A ^⑤	27068
	850	1500	587A ^⑤	30375
	650	1500	686A ^⑤	33615
	500	1300	687A ^⑤	40472
400	1750	1900	B586A ^⑤	32670
	1150	1500	685A ^⑤	35910
	850	1500	686A ^⑤	39150
	650	1400	687A ^⑤	42030
	500	1200	FBK845ASY ^⑤	47280
500	1750	1900	B587A ^⑤	43710
	1150	1500	685A ^⑤	46013
	850	1400	686A ^⑤	48938
	650	1200	FBK845ASY ^⑤	51096
	500	1000	FBK846ASY ^⑤	55562
600	1750	1900	B684A ^⑤	63853
	1150	1500	686A ^⑤	67221
	850	1300	687A ^⑤	67872
	650	1200	FBK846ASY ^⑤	74309
	500	1000	FBK848ASY ^⑤	82989
700	1750	1900	BK685A ^⑤	70977
	1150	1300	K687A ^⑤	74721
	850	1200	FBR846ASY ^⑤	75416
	650	1000	FBR847ASY ^⑤	83753
	500	1000	FBR848ASY ^⑤	91260
800	1750	1900	BK686A ^⑤	78286
	1150	1250	FBG845ASY ^⑤	82416
	850	1200	FBG846ASY ^⑤	83210
	650	1000	FBR847ASY ^⑤	91782
	500	1000	FBR848ASY ^⑤	92766
900	1150	1250	FBG845ASY ^⑤	92042
	850	1200	FBG847ASY ^⑤	92766
	1150	1250	FBL846ASY ^⑤	99936
	850	1000	FBL848ASY ^⑤	100562
	1250	1150	1250	FBM848ASY ^⑤

① Prices shown are in U.S.A. dollars.
 ② 550 volt motor frames will generally be the same as 500 volt motor frames. For exact frame, refer to Westinghouse.
 ③ Frame sizes are tentative. Westinghouse reserves the right to substitute frames at no change in price.
 ④ Suitable for power supply Type C only.
 ⑤ This rating must be force ventilated. List price does not include a blower. Add motor mounted blower from modification section 3530 P WE A.
 ⑥ 300 Hp motors and larger come under Discount Symbol W-21.
 ⑦ Motors 250 Hp and larger are not available at 240 volts.
 ⑧ Changed or added since previous issue.



November 24, 1975
 Supersedes 3520
 Price List
 pages 27-28 dated June 11, 1974.
 Prices effective November 24, 1975 and
 subject to change without notice.
 (Refer to Selling Policy 3000 S WE A)
 Mailed to: E, D, C/1747/PL

Shunt and Stabilized Shunt Wound
 ½ to 900 Horsepower
 Class F Insulation, 40°C Ambient
 1.00 Service Factor
 For Use With Rectified Power Supplies

Specific Purpose Life-Line H Totally Enclosed Dc Motors

Totally Enclosed Dc Motors Power Supply Type K


Hp	Base Speed, Rpm	Max. Speed, Rpm	Enclosure	180 Volts	
				Frame ①	List Price W-20 ②
¾	1150	1380	NV	187A	\$ 948
				216A	1044
1	1750	2050	NV	187A	945
				216A	1044
1½	2500	2750	NV	187A	1029
				216A	1056
				218A	1244
2	2500	2750	NV	187A	1131
				216A	1161
				218A	1449
3	2500	2750	NV	218A	1395
				218A	1431
				2112A	2285
5	2500	2750	NV	2112A	1838
				2112A	2369
				286A	2921

Totally Enclosed Dc Motors, Power Supply Type C or D

Hp	Base Speed Rpm	Enclosure	Max. Speed Rpm	240 Volts		500 or 550 Volts②				
				Frame ①	List Price W-20 ②	Frame ③	List Price W-20 ④			
½	850	NV	1700	187A	\$1028			
				187A	1182			
				216A	2096			
				256A	2316			
¾	1750	NV	2700	187A	903			
				187A	948			
				216A	1127			
1	650	NV	1600	216A	2058			
				218A	2499			
				2112A	2798			
1	1750	NV	2300	187A	945	187A	\$1062			
				187A	1044	187A	1157			
				216A	1244	216A	1349			
1	650	NV	1600	218A	2274			
				2112A	2643			
				2112A	3032			
1½	3500	NV	3850	187A	1002			
				187A	1029	187A	1143			
				187A	1056	187A	1169			
				216A	1244	216A	1349			
				218A	2120	218A	2295			
2	650	NV	1600	256A	2577			
				256A	2976			
				324A	3486			
				187A	1119			
				187A	1131	187A	1241			
2	2500	NV	3000	216A	1161	216A	1269			
				218A	1449	218A	1547			
				256A	2336	256A	2502			
				650	NV	1600	284A	2771
				500	FC	1500	284A	3326
3	400	FC	1200	324A	3890			
				326A	4826			
				3500	NV	3850	187A	1358
				2500	NV	3000	216A	1395	216A	1494
				1750	NV	2300	218A	1431	218A	1529
3	1150	NV	1750	2112A	2330	2112A	2453			
				850	NV	1700	286A	2783	286A	2933
				650	FC	1600	284A	3285
				500	FC	1500	324A	3963
				400	FC	1200	365A	4994
5	300	FC	900	365A	5906			
				3500	NV	3850	218A	1788
				2500	NV	3000	2112A	1838	2112A	1920
				1750	NV	2300	2112A	2369	2112A	2534
				1150	NV	2000	286A	2921	286A	3065
5	850	FC	1700	286A	3501	286A	3749			
				650	FC	1600	326A	4517
				500	FC	1500	365A	5373
				400	FC	1200	366A	6368
				300	FC	900	405A	7584

① Prices shown are in U.S.A. dollars.
 ② 550 volt motor frames will generally be the same as 500 volt motor frames. For exact frame, refer to Westinghouse.

③ Frame sizes are tentative. Westinghouse reserves the right to substitute frames at no change in price.
 ④ Changed or added since previous issue.

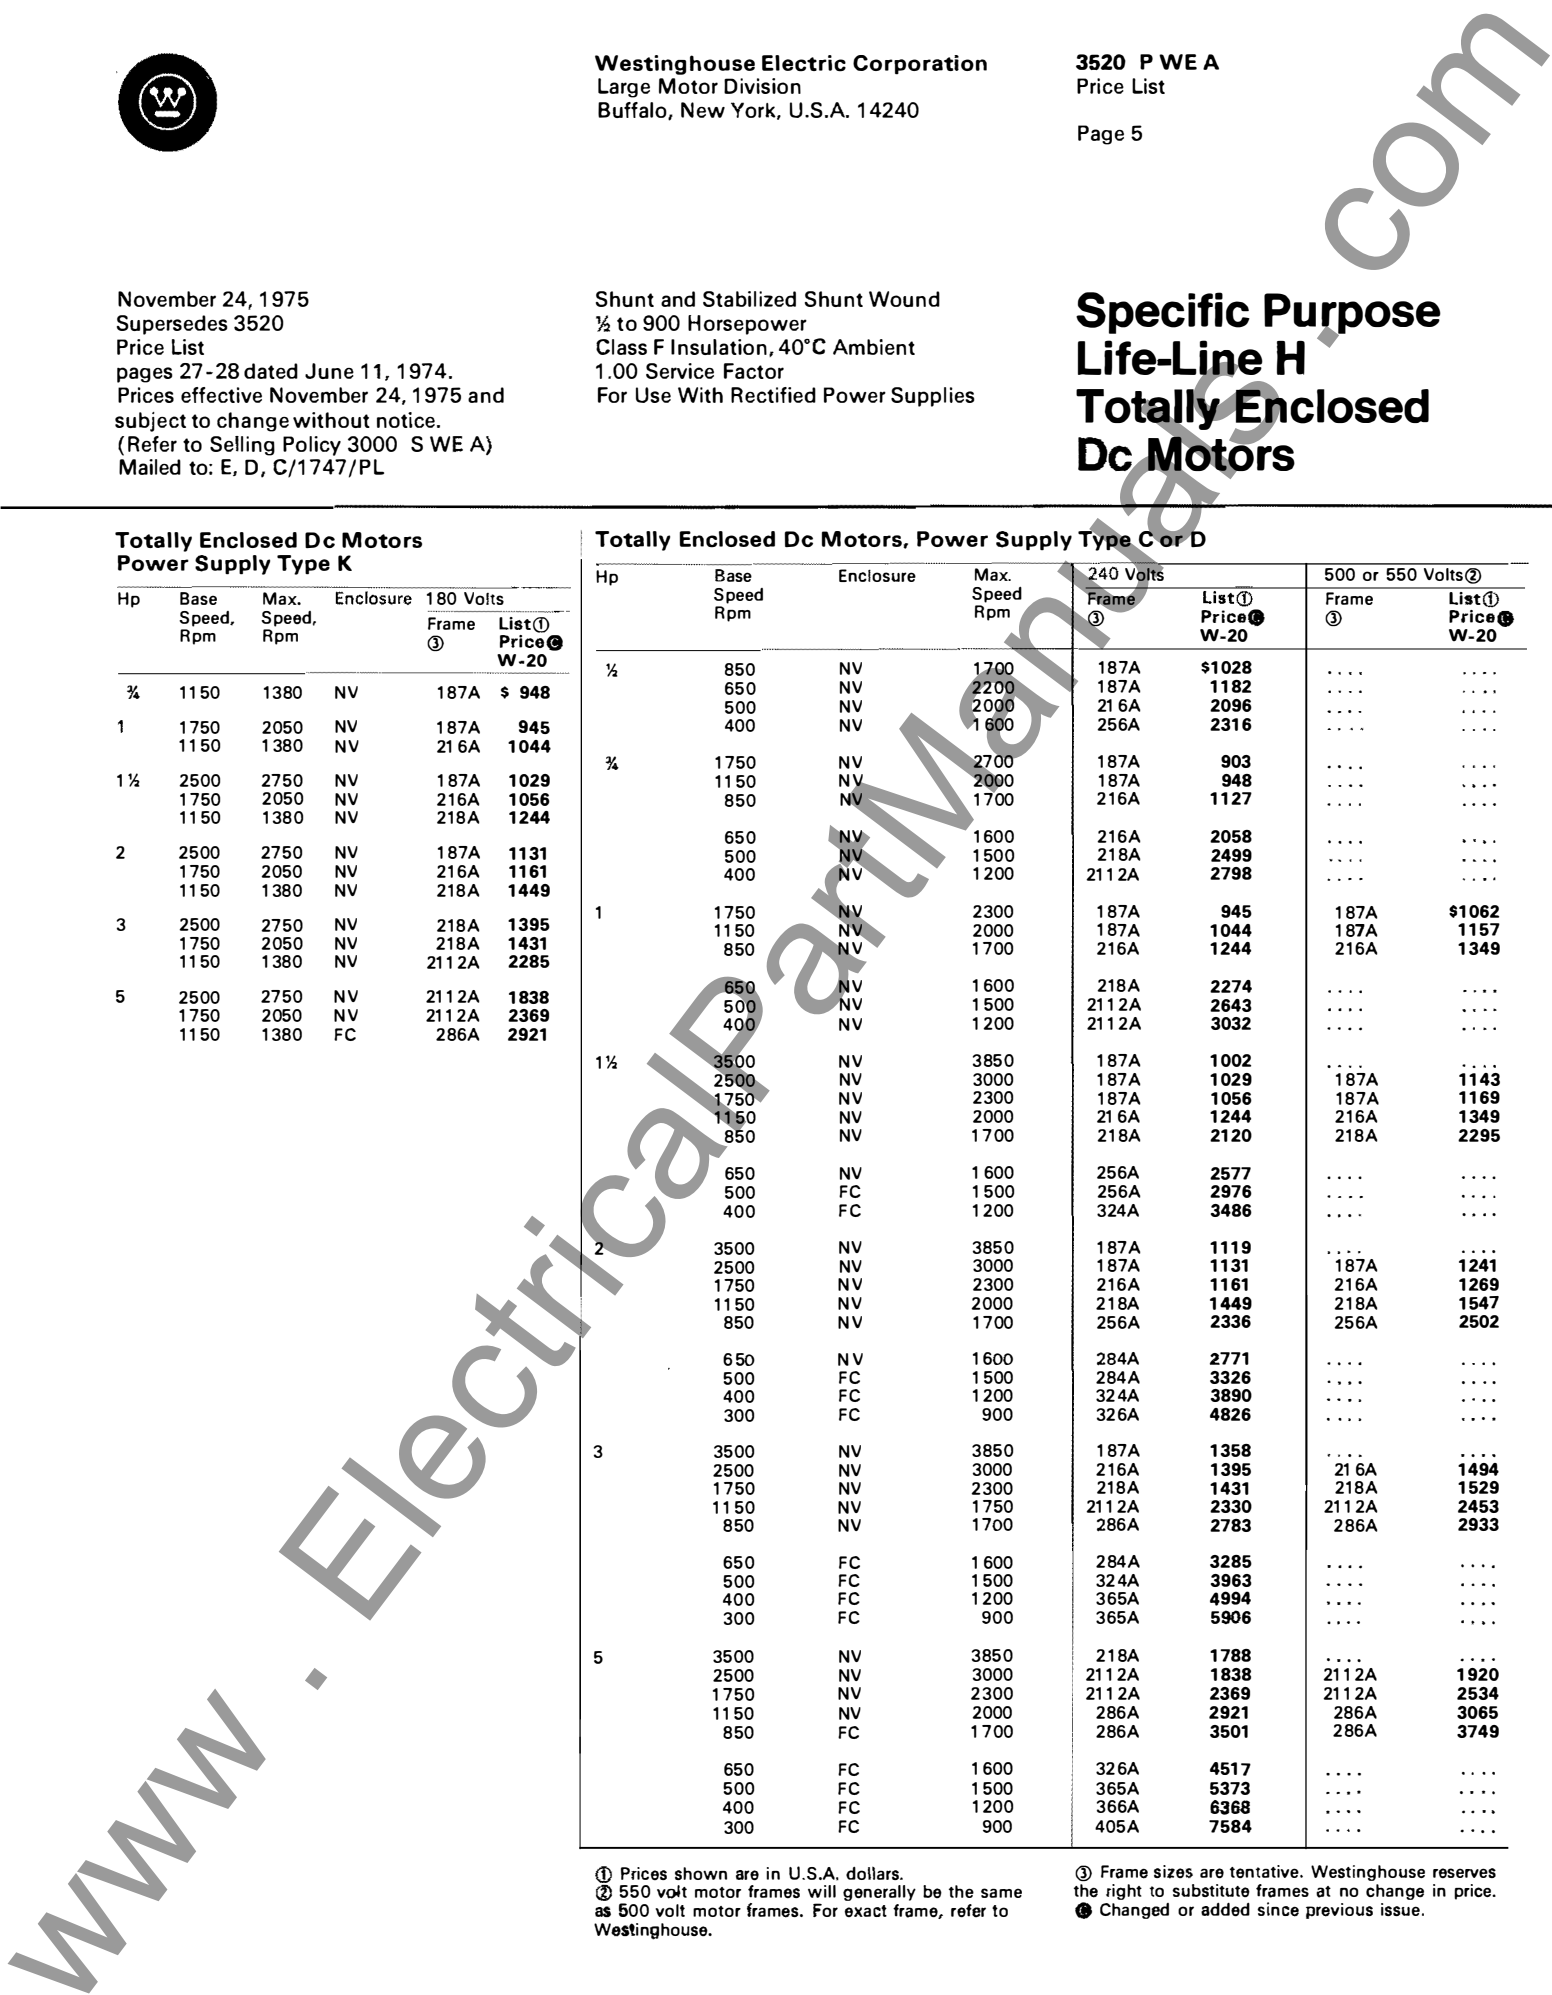



Totally Enclosed Dc Motors, Power Supply Type C or D, Continued

Hp	Base Speed, Rpm	Max. Speed, Rpm	En-closure	Frame③		List ① Price② W-20	Hp	Base Speed, Rpm	Max. Speed, Rpm	En-closure	Frame③		List ① Price② W-20		
				240 Volts	500 Volts ②⑤						240 Volts	500 Volts ②⑤			
7 1/2	3500	3500	NV	2112A	\$ 2405	50	1750	2100	FC	444A	444A	\$ 9864		
	2500	3000	NV	2112A	2112A	2817		1150	2000	FC	448A	448A	11199		
	1750	2300	NV	286A	286A	2888		850	1700	HX	504A	504A	12983		
	1150	2000	FC	286A	286A	3527		650	1600	HX	505A	507A	15525		
	850	1700	FC	326A	326A	4484		500	1500	HX	507A	20177		
10	650	1600	FC	365A	365A	5423	400	1200	HX	B584A	24525			
	500	1500	FC	404A	6485	300	900	HX	B586A	28458			
	400	1200	FC	405A	7947	60	1750	2100	FC	448A	448A	10739		
	300	900	FC	447A	9491		1150	2000	FC	445A	445A	12405		
	3500	3500	FC	256A	3146		850	1700	HX	504A	504A	14463		
	2500	3000	FC	256A	256A	3230	650	1600	HX	505A	507A	17387			
	1750	2300	FC	286A	286A	3312	500	1500	1500	HX	B584A	22106		
	1150	2000	FC	324A	324A	4319		400	1200	HX	B586A	25253		
	850	1700	FC	365A	365A	5160		300	900	HX	B684A	30729		
	650	1600	FC	404A	404A	6347	75	1750	2100	FC	448A	448A	11966		
	500	1500	FC	406A	7515		1150	2000	HX	504A	504A	13860		
	400	1200	FC	408A	9206		850	1700	HX	505A	507A	16619		
	300	900	HX	447A	12158		650	1600	HX	B584A	B584A	19737		
	500	1500	HX	405A	9206		500	1500	HX	B586A	B587A	25511		
	15	2500	3000	FC	286A	286A	3912	400	1200	HX	B587A	B587A	29060		
1750		2300	FC	324A	324A	4304	300	900	HX	B684A	B687A	32930			
1150		2000	FC	365A	365A	5294	100	1750	2000	HX	445A	445A	13920		
850		1700	FC	404A	404A	6312		1150	2000	HX	505A	505A	17085		
650		1600	FC	406A	406A	8165		850	1700	HX	B584A	B585A	19412		
500		1500	FC	408A	9780	650	1600	HX	B586A	B586A	23490			
400		1200	FC	448A	11796	400	1500	1500	HX	B587A	B587A	30347		
300		900	HX	447A	14526		400	1200	HX	B684A	B686A	32384		
400		1200	HX	447A	14526		300	900	HX	B684A	B686A	38916		
20		3500	3500	FC	324A	4712	125	1750	2000	HX	504A	504A	15644	
		2500	3000	FC	324A	324A	4833		1150	2000	HX	507A	507A	19412	
		1750	2300	FC	365A	365A	4959		850	1700	HX	B585A	B585A	22662	
		1150	2000	FC	404A	404A	6150	650	1600	HX	B587A	B587A	27054		
		850	1700	FC	408A	408A	7848	400	1500	1500	HX	B684A	B685A	31862	
		650	1600	FC	408A	408A	9720		400	1200	HX	B685A	B686A	37122	
	500	1500	HX	444A	11556	300		900	HX	B686A	B687A	43034		
	400	1200	HX	445A	13689	150	1750	2000	HX	K505A	B505A	18029		
	300	900	HX	504A	16875		1150	2000	HX	B584A	B584A	22247		
	400	1200	HX	504A	16875		850	1700	HX	B586A	B586A	25724		
	25	2500	3000	FC	326A	326A	5460	650	1600	HX	B684A	B684A	30464		
		1750	2300	FC	366A	366A	5825	400	1500	1500	HX	B685A	B685A	35987	
		1150	2000	FC	405A	405A	7383		400	1200	HX	B685A	B686A	39966	
		850	1700	FC	445A	445A	8960		300	900	HX	B687A	B687A	46203	
		650	1600	FC	448A	448A	11138	200	1750	2000	HX	BK584A	B584A	22857	
500		1500	HX	445A	13248	1150		1800	HX	BK586A	B584A	27687		
400		1200	HX	504A	15632	850		1700	HX	B684A	B685A	30534		
300		900	HX	584A	18612	650	1600	HX	B685A	B686A	35876			
30		2500	3000	FC	366A	366A	6027	400	1500	1500	HX	B687A	B687A	41723	
		1750	2300	FC	404A	404A	6459		400	1200	HX	B687A	B687A	46272	
		1150	2000	FC	408A	408A	8147		300	900	HX	B846AS	B844AS	54743	
		850	1700	FC	448A	448A	9959	250	1750	1900	HX	⑤	B585A	28188	
		650	1600	HX	445A	445A	12260		⑤	④1150	1700	HX	⑤	B684A	33210
		500	1500	HX	504A	14681		④850	1600	HX	⑤	B686A	35940	
		400	1200	HX	505A	17171	④650	1600	HX	⑤	B687A	39792		
	300	900	HX	507A	21044	400	1500	1400	HX	⑤	B845AS	48062		
	2500	3000	FC	404A	404A	7400		④400	1200	HX	⑤	B846AS	53859		
	1750	2100	FC	405A	405A	8177		④300	900	HX	⑤	B847AS	60609		
	1150	2000	FC	447A	447A	9707	400	1500	1500	HX	⑤		
	850	1700	HX	445A	445A	11862		④500	1400	HX	⑤		
	650	1600	HX	504A	504A	13860		④400	1200	HX	⑤		
	500	1500	HX	505A	17604	400	1500	1500	HX	⑤		
	400	1200	HX	507A	20322		④300	900	HX	⑤		
300	900	HX	584A	24966			

Totally Enclosed Power Supply Type C

Hp	Base Speed, Rpm	Max. Speed, Rpm	En-closure	Frame③		List ① Price② W-21⑥
				240 Volts	500 Volts ②⑤	
300	1750	1900	HX	⑤	B586A	\$ 33825
	⑤ 1150	1600	HX	⑤	B685A	37353
	850	1500	HX	⑤	B687A	41007
	650	1500	HX	⑤	B845AS	43700
	500	1300	HX	⑤	B846AS	52613
400	400	1200	HX	⑤	B847AS	58185
	300	900	HX	⑤	B848AS	67926
	⑤ 1750	1900	HX	⑤	B684A	45084
	⑤ 1150	1500	HX	⑤	B687A	48479
	850	1500	HX	⑤	B845AS	50895
500	650	1400	HX	⑤	B846AS	54639
	500	1200	HX	⑤	B847AS	59100
	400	1000	HX	⑤	B848AS	69321
	⑤ 1150	1500	HX	⑤	B844AS	59817
	⑤ 850	1400	HX	⑤	B846AS	63620
600	650	1200	HX	⑤	B847AS	65870
	500	1000	HX	⑤	B848AS	69452
	⑤ 1150	1500	HX	⑤	B845AS	84192
	⑤ 850	1300	HX	⑤	B847AS	85840
	650	1200	HX	⑤	B848AS	92886
700	1150	1300	HX	⑤	B846AS	93402
	850	1200	HX	⑤	B848AS	94269
800	1150	1250	HX	⑤	B847AS	103020
⑤ 900	1150	1250	HX	⑤	B848AS	115052

- ① Prices shown are in U.S.A. dollars.
- ② 550 volt motor frames will generally be the same as 500 volt motor frames. For exact frame, refer to Westinghouse.
- ③ Frame sizes are tentative. Westinghouse reserves the right to substitute frames at no change in price.
- ④ Suitable for power supply Type C only.
- ⑤ Motors larger than 200 hp are 500 volt only and suitable for power supply, Type C only.
- ⑥ 300 Hp motors and larger come under Discount Symbol W-21.
- ⑦ Changed or added since previous issue.



April 27, 1976
 New Information
 Prices effective April 27, 1976 and
 subject to change without notice.
 (Refer to Selling Policy 3000 S WE A)
 Mailed to: E, D, C/1747/PL

Totally Enclosed Non-Ventilated
 Series or Compound Wound
 Single Straight Shaft
 Class F Insulation, 40°C Ambient
 1.00 Service Factor


Specific Purpose Life-Line S Intermittent Rated Dc Motors

240 Volts, ¼ to 150 Horsepower

Hp	Speed, Rpm		¼ Hour Rating		½ Hour Rating	
	Series Wound	Compound Wound	Frame	Basic List Price ^① W-26	Frame	Basic List Price ^① W-26
¾	1050	1150	187A	\$ 576	187A	\$ 651
	750	850	187A	744	187A	773
1	1600	1750	187A	580	187A	603
	1050	1150	187A	693	187A	719
	750	850	187A	817	187A	848
1½	1600	1750	187A	668	187A	692
	1050	1150	187A	782	187A	786
	750	850	187A	894	187A	945
2	1600	1750	187A	753	187A	785
	1050	1150	187A	891	187A	945
	750	850	216A	1571	216A	1608
3	1600	1750	187A	838	187A	857
	1050	1150	187A	1067	216A	1098
	750	850	216A	1627	218A	1707
5	1600	1750	187A	1053	216A	1086
	1050	1150	216A	1661	218A	1670
	750	850	218A	1938	256A	2045
7½	1600	1750	216A	1685	218A	1730
	1050	1150	218A	2109	256A	2142
	750	850	256A	2499	283AT	2556
10	1600	1750	218A	2008	256A	2118
	1050	1150	256A	2516	283AT	2573
	750	850	283AT	2958	284AT	3041
15	1600	1750	256A	2373	283AT	2420
	1050	1150	283AT	2853	283AT	2930
	750	850	283AT	3365	286AT	3524
20	1600	1750	283AT	2845	283AT	2921
	1050	1150	283AT	3449	284AT	3612
	750	850	284AT	4187	324AT	4245
25	1600	1750	283AT	3256	284AT	3309
	1050	1150	284AT	4086	286AT	4182
	750	850	286AT	5129	326AT	5160
30	1600	1750	283AT	3735	286AT	3815
	1050	1150	284AT	4600	324AT	4848
	750	850	324AT	5799	327AT	5873
40	1600	1750	284AT	4103	324AT	4202
	1050	1150	286AT	5307	326AT	5349
	750	850	326AT	6402	364AT	6506
50	1600	1750	286AT	4736	324AT	4997
	1050	1150	324AT	6248	327AT	6347
	750	850	327AT	7549	366AT	7725
60	1600	1750	324AT	5309	326AT	5696
	1050	1150	326AT	7146	366AT	7301
	750	850	364AT	8607	367AT	9050
75	1600	1750	326AT	6407	327AT	6513
	1050	1150	364AT	8124	367AT	8264
	750	850	366AT	10015	408AT	10253
100	1600	1750	327AT	7474	366AT	7646
	1050	1150	366AT	9683	408AT	9897
	750	850	367AT	11427	447AT	12049
125	1600	1750	364AT	9482	367AT	9683
	1050	1150	367AT	11510	447AT	11823
	750	850	408AT	12603	448AT	12917
150	1600	1750	366AT	11142	408AT	11751
	1050	1150	408AT	12917	448AT	14319

① Prices shown are in U.S.A. dollars.

Note: 120 volt ratings, ¼ to 15 hp, are listed on page 8.

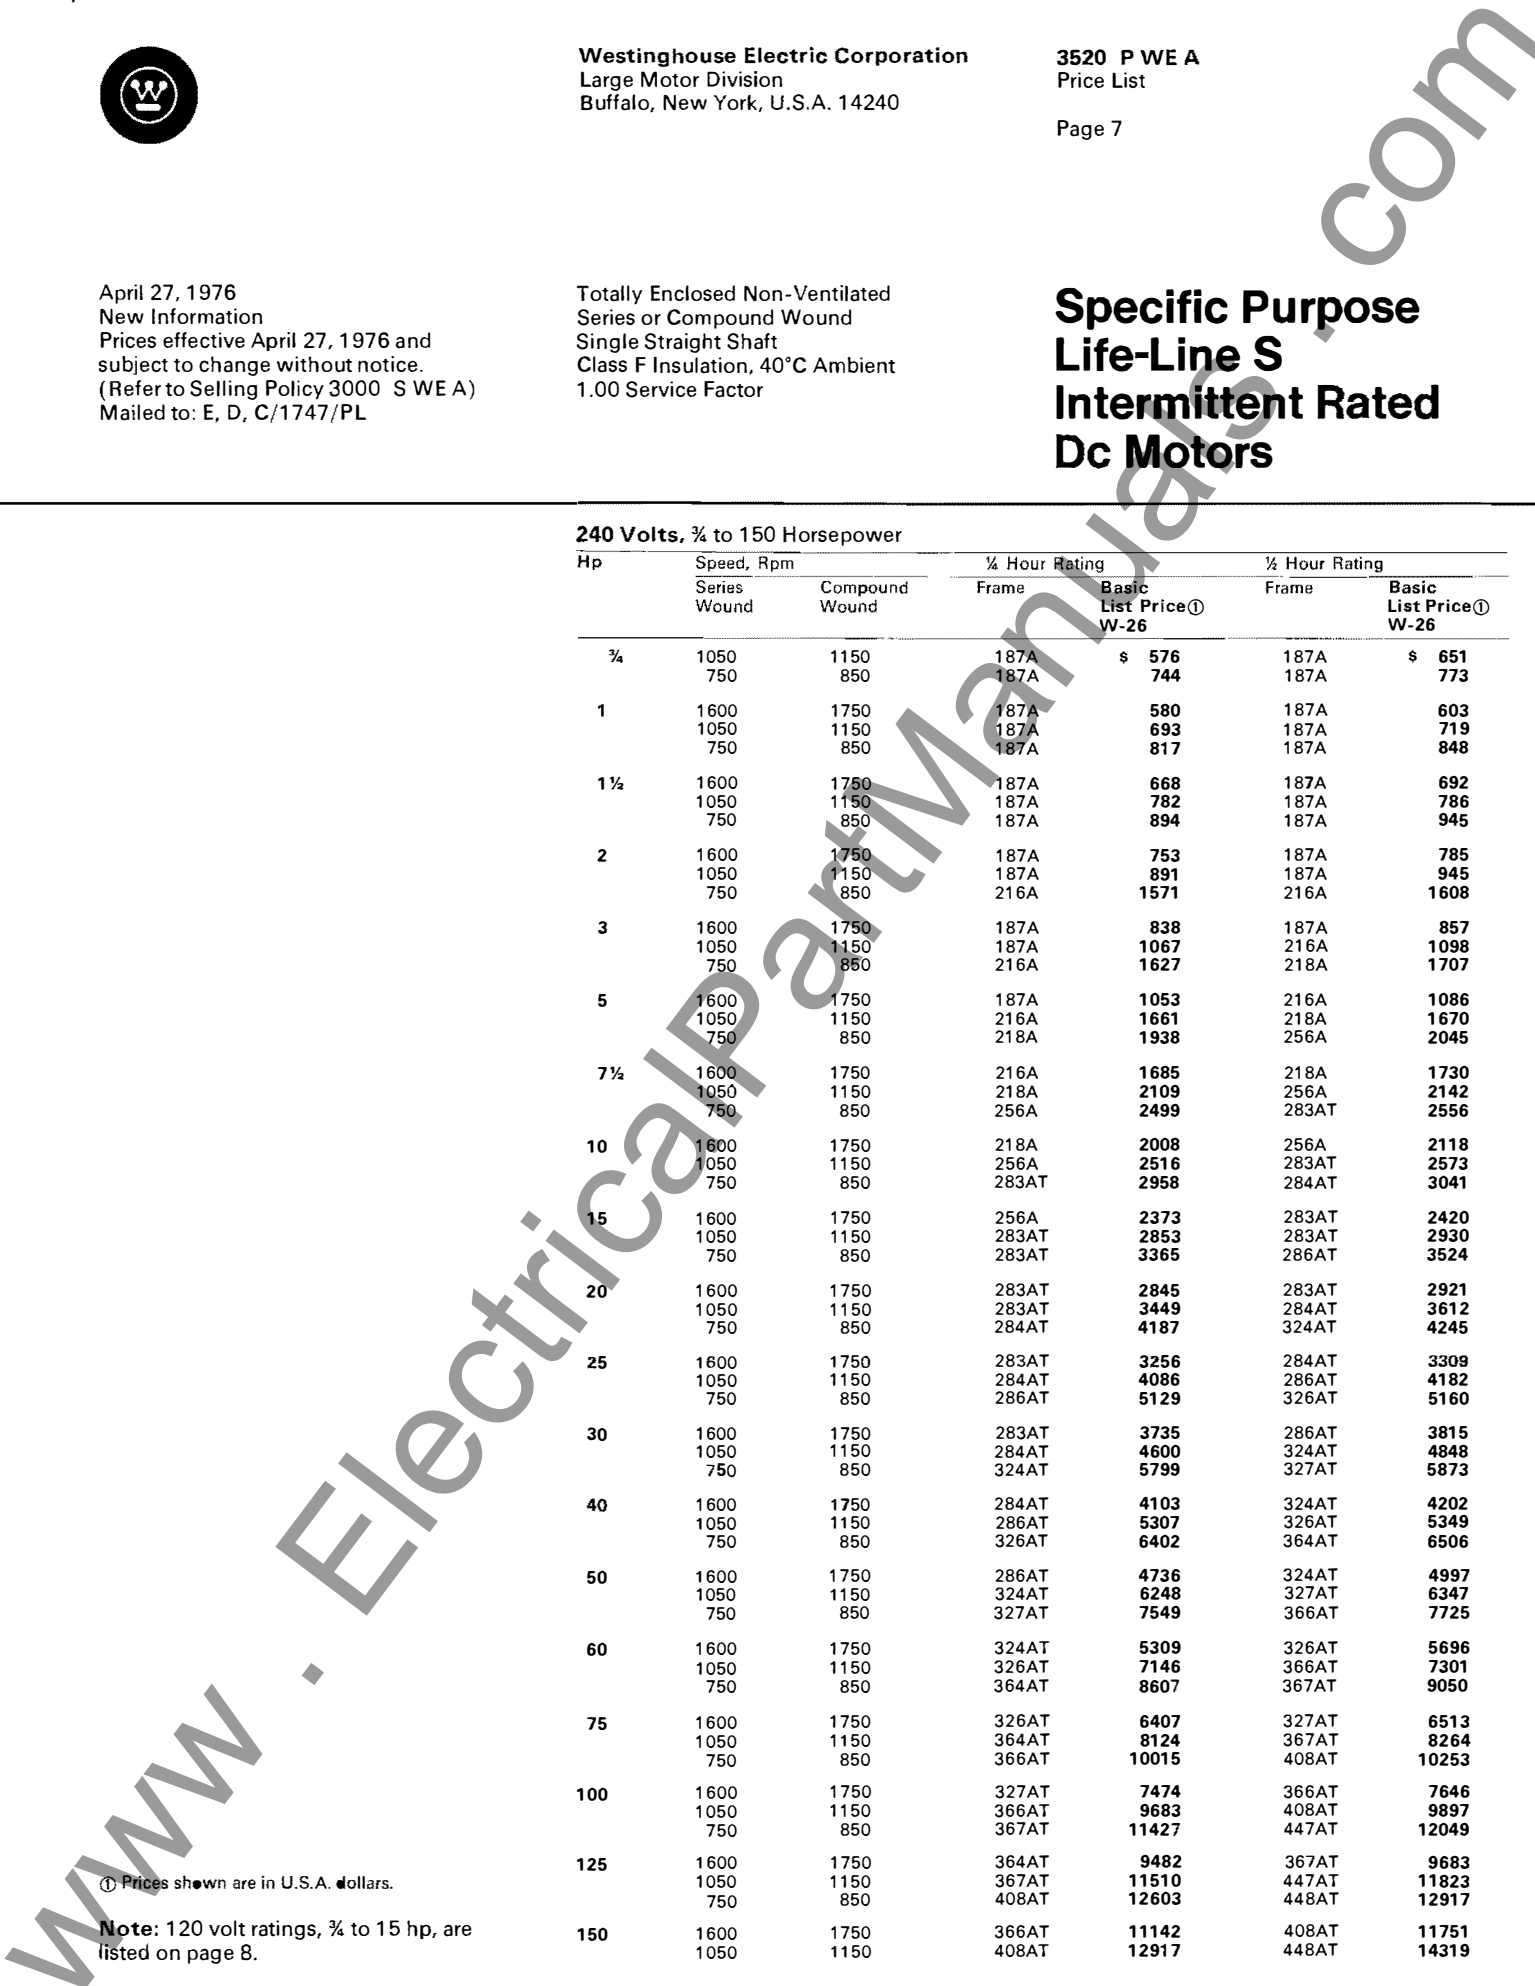



120 Volts, ¼ to 15 Horsepower

Hp	Speed, Rpm		¼ Hour Rating		½ Hour Rating	
	Series Wound	Compound Wound	Frame	Basic List Price ^① W-26	Frame	Basic List Price ^① W-26
¾	1050	1150	187A	\$ 576	187A	\$ 651
	750	850	187A	744	187A	772
1	1600	1750	187A	580	187A	604
	1050	1150	187A	693	187A	719
	750	850	187A	817	187A	847
1½	1600	1750	187A	668	187A	691
	1050	1150	187A	782	187A	786
	750	850	187A	894	187A	945
2	1600	1750	187A	753	187A	785
	1050	1150	187A	891	187A	945
	750	850	216A	1571	216A	1608
3	1600	1750	187A	838	187A	856
	1050	1150	216A	1067	216A	1098
	750	850	216A	1627	218A	1679
5	1600	1750	216A	1053	216A	1086
	1050	1150	218A	1661	218A	1669
	750	850	256A	1938	256A	2045
7½	1600	1750	216A	1685	218A	1730
	1050	1150	218A	2109	283AT	2142
	750	850	283AT	2499	283AT	2555
10	1600	1750	218A	2008	256A	2118
	1050	1150	283AT	2516	283AT	2572
	750	850	283AT	2958	284AT	3040
15	1600	1750	256A	2640	283AT	2686
	1050	1150	283AT	3120	284AT	3196
	750	850	284AT	3632	286AT	3922

① Prices shown are in U.S.A. dollars.

Note: 240 volt ratings, ¾ to 150 hp, are listed on page 7.